

## Product Datasheet

# 28-Port 10G Uplink Managed PoE Switch

## ONV-POE36028PFM



## OVERVIEW

The ONV-POE36028PFM is a 10G uplink managed PoE switch independently developed by ONV. It has 24\*10/100/1000Base-T RJ45 ports and 4\*1/10G SFP+ fiber slot ports. Port 1-24 can support IEEE802.3af/at standard PoE power supply. single port PoE power reaches 30W, and the maximum PoE output power is 400W(at-600W). As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP phone, building visual access control intercom, etc. through a network cable to meet the network environment that needs high-density PoE power supply. It is suitable for hotel, campus, factory dormitory and small and medium-sized enterprise.

The ONV-POE36028PFM has L2+ full network management function, supports IPV4/IPV6 management, static route full line rate forwarding, complete security protection mechanism, complete ACL/QoS policy and rich VLAN functions, and is easy to manage and maintain. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS to improve link backup and network reliability. When one-way

network fails, communication can be quickly restored to ensure important Uninterrupted communication for applications. According to the actual application requirements, you can configure multiple application services such as PoE power management, port traffic control, VLAN division, and SNMP through the Web network management mode.

## FEATURE

### ■ Gigabit access, 10G uplink

- ◇ All series supports Gigabit Ethernet port and 10G SFP+ uplink port combination, which enables users to flexibly build networking to meet the needs of various scenarios.
- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.

### ■ Intelligent PoE power supply

- ◇ 24\*10/100/1000Base-T RJ45 ports can support POE power supply to meet the needs of security monitoring, teleconferencing system, wireless coverage, and other scenarios.
- ◇ IEEE 802.3af/at PoE standard, without damaging non-PoE devices.
- ◇ Priority system for PoE port, it will supply power to the high priority level port first when the power budget is insufficient and avoid overwork of the device.
- ◇ PoE network management, realize PoE port power allocation, priority setting, port power status viewing, time scheduling, etc.

### ■ Security

- ◇ 802.1X authentication.
- ◇ Port isolation, Storm control.
- ◇ IP-MAC-VLAN-Port binding.

### ■ Strong business processing capability

- ◇ IEEE802.1Q VLAN, flexible VLAN division, Voice VLAN, and QinQ configuration.
- ◇ QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including EQU, SP, WRR & SP+WRR.
- ◇ ALC, filter data packet through configuring matching rules, processing operation & time permission, and provide flexible and safe access control.
- ◇ IGMP V1/V2 and IGMP Snooping.
- ◇ ERPS/STP/RSTP/MSTP.
- ◇ Static and dynamic aggregation.
- ◇ TACACS+

### ■ Stable and reliable

- ◇ Low power consumption, No fan, galvanized steel casing.
- ◇ Self-developed power supply, high redundancy design, providing a long term and stable PoE power output.
- ◇ CCC, CE, FCC, RoHS.
- ◇ The user-friendly panel, it can show the device status through the LED indicator of PWR, SYS, Link, L/A, PoE.

### ■ Easy operation and maintenance management

- ◇ Web management, CLI command line (Console, Telnet), SNMP (V1/V2/V3).
- ◇ HTTPS, SSLV3, and SSHV1/V2.
- ◇ RMON, system log, LLDP, History, Alarms, Stats and Events, and port traffic statistics.
- ◇ CPU monitoring, memory monitoring, Ping test, and cable diagnose.

## TECHNICAL SPECIFICATION

Model	ONV-POE36028PFM	ONV-POE36028PFM-at
<b>Interface Characteristics</b>		
Fixed Port	24*10/100/1000Base-T PoE ports (Data/Power)	
	4*1/10G uplink SFP+ fiber slot ports (Data)	
	1*Console RS232 port (115200, N,8,1)	
Ethernet Port	Port 1-24 can support 10/100/1000BaseT auto-sensing, Full/half duplex MDI/MDI-X self-adaption	
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meter)	
	100BASE-TX: Cat5 or later UTP (≤100 meter)	
	1000BASE-T: Cat5e or later UTP (≤100 meter)	
Optical Fiber Port	10G SFP+ optical fiber port, default matching optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)	
Optical Cable/ Distance	Multi-mode:850nm 0~300M(10G) ,850nm 0~500M (1.25G); Single-mode:1310nm 0~40KM,1550nm 0~120KM.	
<b>Chip Parameter</b>		
Network Management Type	L2+	
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T IEEE802.3z 1000Base-X IEEE802.3ae 10GBase-LR/SR IEEE802.3x, IEEE 802.3ad	
Forwarding Mode	Store and Forward (Full Wire Speed)	
Switching Capacity	598Gbps (non-blocking)	
Forwarding Rate@64byte	95.23Mpps	


DRAM Memory	2G	
Flash Memory	128Mbit	
MAC	32K	
Buffer Memory	32M	
Jumbo Frame	9.6K	
LED Indicator	Power: PWR (yellow), system:SYS (yellow), network: Link (yellow), PoE: PoE (green), Fiber port : L/A (green)	
Reset Switch	Yes, support one key to restore factory settings	
<b>PoE &amp; Power Supply</b>		
PoE Port	Port 1 to 24	
PoE Management	PoE working status Delay start of power supply PoE output priority configuration Scheduling of PoE operation and time Total power limit of PoE power supply PoE output power allocation, off& af &at	
Power Supply Pin	Default: 1/2 (+), 3/6 (-)	
Max Power Per Port	30W, IEEE802.3af/at	
Total PWR / Input Voltage	400W/ (AC100-240V)	600W/ (AC100-240V)
Power Consumption	Standby<25W, Full Load<400W	Standby<30W, Full Load<600W
Power Supply	Built-in power supply, AC100~240V 50-60Hz 5A	Built-in power supply, AC100~240V 50-60Hz 6.6A
<b>Physical Parameter</b>		
Operation TEMP / Humidity	-20~+55°C;5%~90% RH Non condensing	
Storage TEMP / Humidity	-40~+80°C;5%~95% RH Non condensing	

Dimension (L*W*H)	440*290*44.5mm	
Net /Gross Weight	<4.4kg / <5.0kg	<4.6kg / <5.3kg
Installation	Desktop type ,19 inch 1U cabinet installation	
<b>Certification &amp; Warranty</b>		
Lightning protection / protection level	Lightning protection: 4KV 8/20us; Protection level: IP30	
Certification	CCC; CE mark, commercial; CE/LVD EN60950; FCC Part 15 Class B; RoHS	
Warranty	3 years, lifelong maintenance.	
<b>Network Management Features</b>		
Interface	IEEE802.3X (Full-duplex) Port temperature protection setting Port green Ethernet Energy-saving setting Broadcast storm control based on port speed The speed limit of the message flow in the access port. The minimum particle size is 64Kbps.	
Layer 3 Features	L2+ network management, IPV4/IPV6 management L3 soft routing forwarding, Static route, Default route @ 128 pcs, APR @ 1024 pcs	
VLAN	4K VLAN based on port, IEEE802.1q VLAN based on the protocol VLAN based on MAC Voice VLAN, QinQ configuration Port configuration of Access, Trunk, Hybrid Guest VLAN and Dynamic VLAN	
Port Aggregation	LACP, Static aggregation Max 14 aggregation groups and 8 ports per group.	
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s), BPDU Guard	

Industrial Ring	G.8032 (ERPS), Recovery time less than 20ms
Network Protocol	250 Ring at most, Max 1024 devices per ring.
Multicast	MLD Snooping v1/v2, Multicast VLAN IGMP Snooping v1/v2, Max 1024 multicast groups, Fast log out
Port Mirroring	Bidirectional data mirroring based on port
QoS	Flow-based Rate Limiting Flow-based Packet Filtering 8*Output queues of each port 802.1p/DSCP priority mapping Diff-Serv QoS, Priority Mark/Remark Queue Scheduling Algorithm (SP, WRR, SP+WRR) Traffic Classification based on L2 MAC Address, L3 Ip Address and L4 TCP/UDP
ACL	Port-based Issuing ACL, ACL based on port and VLAN L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc.
Security	Port Security IP-MAC-VLAN-Port binding ARP inspection, Anti-DoS attack AAA & RADIUS, MAC learning limit Mac black holes, IP source protection IEEE802.1X & MAC address authentication Broadcast storm control, Backup for host datum SSH 2.0, SSL, Port isolation, ARP message speed limit User hierarchical management and password protection
DHCP	DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay
Management	One-key recovery Cable Diagnose, LLDP


	<p>Web Management (HTTPS)</p> <p>NTP, System work log, Ping Test</p> <p>CPU instant utilization status view</p> <p>Console/AUX Modem/Telnet/SSH2.0 CLI</p> <p>Download &amp; Management on FTP, TFTP, Xmodem, SFTP, SNMP</p> <p>V1/V2C/V3</p> <p>ONV NMS - smart network management system platform (LLDP+SNMP)</p> <p>Multiple Configuration File</p>
System	<p>Category 5 Ethernet network cable</p> <p>Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later;</p> <p>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in a network</p>

## DIMENSION

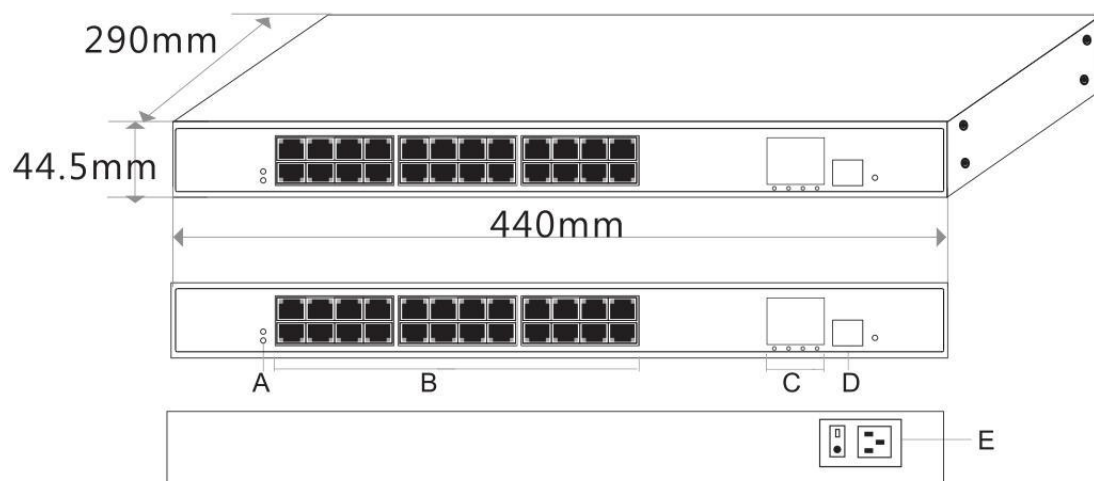

- A. Working Indicator
- B. 24\* 10/100/1000M PoE Ports
- C. 4\*10G SFP+ Ports
- D. Console Port
- E. Power Input Port AC100-240V, 50/60Hz

## APPLICATION

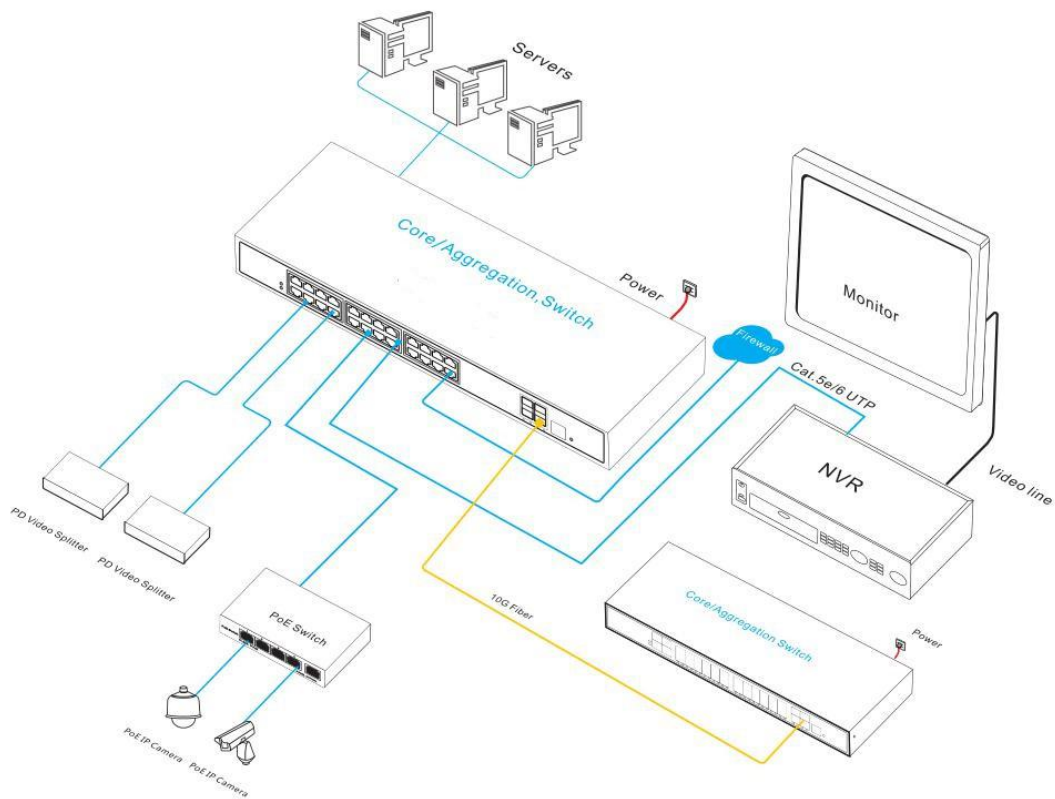

## ORDERING INFORMATION

Model	Description
ONV-POE36028PFM	L2+ managed PoE fiber switch with 24* 10/100/1000M RJ45 ports and 4*1/10G SFP+ fiber slot ports, Port 1-24 can support IEEE802.3af/at PoE standard, Built-in 400W power supply. Support 1U/19 inch rack installation.
ONV-POE36028PFM -at	L2+ managed PoE fiber switch with 24* 10/100/1000M RJ45 ports and 4*1/10G SFP+ fiber slot ports, Port 1-24 can support IEEE802.3af/at PoE standard, Built-in 600W power supply. Support 1U/19 inch rack installation.

**Note:** The SFP optical module is not included by default and needs to be purchased separately.

## PACKING LIST

PACKING LIST	CONTENT	QTY	UNIT
	28-Port 10G uplink managed PoE switch	1	SET
	AC Power Cable	1	PC
	RJ45-DB9 Line	1	PC
	Mounting Kits(Hanging Ear)	1	SET
	User Guide	1	PC
	Warranty Card	1	PC

## OPTICAL MODULE INFORMATION

Product	Model	Description	Unit
1.25G Optical module	ONV-2630	SFP optical module, 1.25G, multi mode dual fiber 850nm, transmission distance: 550m, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2632	SFP optical module, 1.25G, single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2612-T	SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2613-R	SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance:	PC

		20km, LC interface, support DDM function, support hot plug and pull.	
	ONV-2612-T-S C	SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	PC
	ONV-2613-R-S C	SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	PC
Power Module	ONV-2633	1.25G SFP optical module transfers to 10/100/1000M RJ45 port.	PC
10G Optical module	ONV-6630	SFP+ optical module, 10G Multi-mode dual fiber 850nm, transmission distance: 300m, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-7832	SFP+ optical module, 10G Single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-7832-33	SFP+ optical module, 10G Single-mode single fiber TX1330nm/RX1270nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-7832-27	SFP+ optical module, 10G Single-mode single fiber TX1270nm/RX13300nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC

## CONTACT US



**OPTICAL NETWORK VIDEO TECHNOLOGIES (SHENZHEN) CO., LTD.**

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: [onv@onv.com.cn](mailto:onv@onv.com.cn)

Website: [www.onvcom.com](http://www.onvcom.com)

Zip: 518000

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen,  
China

Factory Address: The 4-6th Floor, No. 59, Huaning Road, Xinwei Community, Dalang  
Street, Longhua District, Shenzhen, China

