



2MP Bullet IP Camera

2MP, 3.6mm, 30M IR
IP66

HLC-74MD

- Full HD 1080P Real Time
- Digital Wide Dynamic Range
- Day & Night Switch Time Control Manual
- Power over Ethernet
- IR LED Built in 30M Available
- IP66
- H.264/ M-JPEG Compression
- Support iPhone/ Android/ Mac
- SDK for Software Integration
- Free Bundle 36 ch Recording Software


Specification

Hardware	
CPU	Multimedia SoC
RAM	128MB
Flash	16MB
Image Sensor	1 / 2.7" Mega-Pixel CMOS Sensor
Sensitivity	Color: 0.1 Lux (AGC ON), B/W: 0.05 Lux (AGC ON)
Lens Type	3.6mm @ F2.0
View Angle	86°(H), 45°(V)
I/O	Yes
ICR	Mechanism IR cut Filter
Audio	G.711(64K) and G.726(32K, 24K) audio compression Input: Ø3.5mm stereo jack line in Output: Ø3.5mm stereo jack, Support 2 way audio
Power over Ethernet	Yes
Power Consumption	DC 12V Max: 3.5W, PoE Max: 4.5W
Wide Dynamic Range	70 dB
S/N Ratio	50 dB
Operating Temperature	IR ON: 50°C, IR OFF: -10°C~60°C / 14°F~140°F
Dimensions	Ø68.4 x H101.5 (mm)
Weight	480g
IR LEDs	
LEDs	6 x High Power LEDs
IR Distance	30M
Network	
Ethernet	10/ 100 Base-T
Network Protocol	IPv4, HTTP, HTTPS, RTSP/RTP/RTCP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, SAMBA, Bonjour, Google Drive, Dropbox, ONVIF Profile S

System	
Video Resolution	1920x1080@30fps, 1280x720@30fps, 640x480@30fps, 320x240@30fps, 176x144@30fps
Video Adjust	Brightness, Contrast, Hue, Saturation, Sharpness, AGC, Shutter Time, Sense-Up, D-WDR, Anti Fog, Lens Distortion Correction, Flip, Mirror, Day & Night Adjustable, Red Gain and Blue Gain, Denoise
Image Snapshot	Yes
Full Screen Monitoring	Yes
Privacy Mask	Yes, 3 different areas
Compression Format	H.264/ M-JPEG
Video Bitrates Adjust	CBR, VBR
Motion Detection	Yes, 3 different areas
Triggered Action	Mail, FTP, Save to SD card, SAMBA
Security	Password protection, HTTPS encrypted data transmission
Firmware Upgrade	HTTP mode, can be upgraded remotely
Simultaneous Connection	Up to 10
Micro SD Card Management (Optional)	
Recording Trigger	Motion Detection, IP check, Schedule
Video Format	AVI, JPEG
Video Playback	Yes
Delete Files	Yes
Web Browsing Requirement	
OS	Windows 7, 8, 10, XP, Microsoft IE 6.0 or above
Mobile Support	iOS 8 or above, Android 5.0 or above
Hardware Suggested	Intel Dual Core 2.8G, RAM: 4GB, Graphic card: 128MB

◆ SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Dimensions

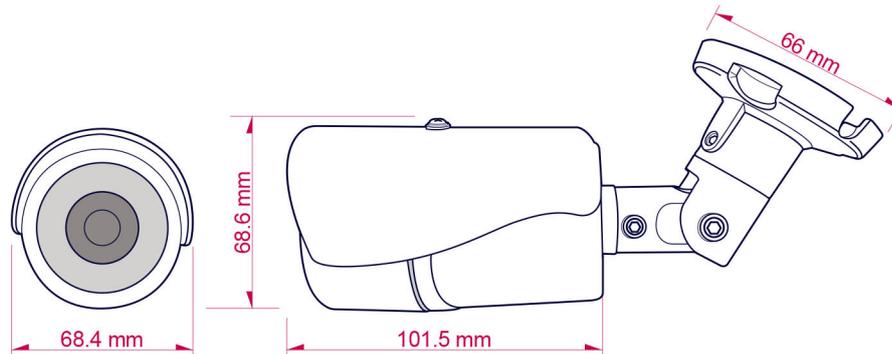

Accessories

Product	Pole Mount Adapter	Junction Box
Model	aHTB-F01000001	aHTB-E01
Material	Aluminum Alloy , SPCC FEVE	SUS 316L
Dimensions	156 x 150 x 63 mm	Ø137x H58.7 mm
Suitable for Pole Diameter	102 - 152mm (4-6 inch)	
Photo		

Product	Ø3.5mm Stereo Jack Microphone
Model	HTA-420
Sensitivity	-38dB
Power	DC 12V
Frequency Range	50 -10000Hz
Working Range	5M
S/R ratio	58dB
Impedance	Max 2.2K
Connector	3.5mm female jack
Photo	

