

# HUNT

## 10X IP Speed Dome 4MP, 10X Zoom, 100M IR IP66

### HLT-S4KQ(10X)

- 4 Megapixel Real Time 10X Zoom Module
- H.264+/ H.264/ JPEG Compression
- Bandwidth Savings up to 50%
- ROI Function
- IR LED Built in 100M Available
- Digital Wide Dynamic Range
- True Day/ Night Function – IR Cut Filter (ICR)
- 360° Continuous Pan and 180° Tilt
- Power over Ethernet
- IP66
- -20°C~60°C Temperature Range for Weather Conditions
- Built-in SD Card Slot for On-board Storage (Optional)
- Support iPhone/ Android/ Mac
- Four Streaming
- SDK for Software Integration
- Free Bundle 36 ch Recording Software



### Specification

Hardware	
CPU	Multimedia SoC
RAM	256 MB
Flash	32 MB
Image Sensor	1/3" Megapixel CMOS Sensor
Sensitivity	Color: 0.08Lux (AGC ON), B/W: 0.03Lux (AGC ON)
Lens Type	10X Optical Zoom
Focal Length	5-50 mm
Maximum Aperture	F1.6~F1.8
View Angle	7°- 51°(H), 4°- 30°(V)
Pan / Tilt Range	Pan:360°, Tilt:90° Auto Flip
Manual Control Speed	Pan:0.8°~66.03°/s, Tilt:0.95°~73.43°/s
Preset(Patrol) Speed	240°/s
Preset Accuracy	<0.05°
Preset Points	256
Preset Focus Mode	Auto / Manual
Patrol	8 groups with 24 point
Auto Pan	Yes
Auto Recovery	Pending Time, Action
Cruise	Yes, 8 groups
Home Position	Yes
Point To Go	Yes
Auto Electronic Shutter	Auto / Shutter Mode
AE Shutter priority	Flickerless, 1/1 ~ 1/5000
Day & Night Mode	Auto / Light Sensor Mode / Color / B/W / Time Mode with auto ICR
Day & Night Level	1 ~ 5
Day & Night Delay	4 ~ 60 sec
DNR Mode	Off / Low / Middle / High
WDR Mode	Off / Low / Middle / High
Video Orientation	Off / Flip / Mirror / Rotate
White Balance	Auto / Indoor / Outdoor / Fine shade 7500K / Cloudy weather 6000K / Fluorescent light 4200K / Halogen light 3200K / Electric light bulb 2900K

Sharpness	-4 ~ 4
Exposure Compensation	-6 ~ 6
Defog	Off / On
OSD	Off / On
Contrast	-4 ~ 4
Saturation	-4 ~ 4
Privacy Mask	3
Power Source	DC 12V/ PoE
Power Consumption	DC 12V Power consumption Max: 10.3W PoE Power consumptionMax: 12.3W
Working Temperature	-20°C~60°C
Dimensions	Ø135xH198 (mm)
Weight	1.8kg


System	
Video Resolution	2592x1520@25fps, 1920x1080@30fps 1280x720@30fps, 640x360@30fps
Video Adjust	Auto Electronic Shutter, Day & Night Mode, Day & Night Level, Day & Night Delay, DNR Mode, WDR Mode, Video Orientation, White Balance, Sharpness Exposure Compensation, Defog, OSD, Contrast, Saturation
Quadruple Streaming	Yes
Image Snapshot	Yes
Full Screen Monitoring	Yes
Compression Format	H.264+/ H.264 / M-JPEG
Video Bitrate Adjust	CVBR, VBR
Motion Detection	Windows area
Triggered Action	Mail, FTP, Samba, Google driver, Dropbox, Save to SD Card (Optional)
Pre/ Post Alarm	Yes, configurable
Security	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based authentication for network protection, QoS/DSCP
Firmware Upgrade	HTTP mode, can be upgraded remotely

## Specification

IR LEDs		Network	
LEDs	6 Units High Power	Ethernet	10/ 100 Base-T
IR Distance	100M	Network Protocol	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA
Micro SD Card Management (Optional)		Client System Requirement	
Recording Trigger	Motion Detection, IP check, Network break down (wire only), Schedule, DI	OS	Windows 7, XP, Microsoft IE 6.0 or above, Chrome, Safari, Firefox
Video Format	AVI, JPEG	Mobile Support	iOS 8.0 or above, Android 4.0.4 or above.
Video Playback	Yes	Suggested	Intel Dual Core 2.53G, RAM: 1024MB, Graphic card: 128MB
Delete Files	Yes		

◆ SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

## Dimensions

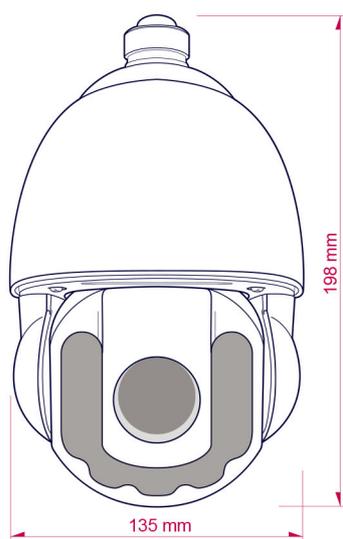

## Accessories

Product Model	Recessed Kit aHTB-S40000001	Wall Mount Bracket aHKB-YA-Z11	Pendant Mount Bracket aHKB-YA-Z13
Photo			

