



User Manual

VANDAL DOME IP CAMERA

V1.0_20200709

WARNING

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE.

DO NOT INSERT ANY METALLIC OBJECT THROUGH VENTILATION GRILLS.

CAUTION

	CAUTION	
	RISK OF ELECTRIC SHOCK DO NOT OPEN	
CAUTION : TO REDUCE THE RISK OF ELECTRIC SHOCK. DO NOT REMOVE COVER (OR BACK). NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.		

COPYRIGHT

THE TRADEMARKS MENTIONED IN THE MANUAL ARE LEGALLY REGISTERED TO THEIR RESPECTIVE COMPANIES.



Table of Contents

PREFACE	1	HTTPs Port	31
PRODUCT SPECIFICATIONS	1	UPnP	31
PRODUCT INSTALLATION	4	UPnP Port Forwarding:	32
Monitor Settings	4	RTSP Setting	33
Hardware Installation	5	RTSP Server	33
Connector Instruction	6	RTSP Port	33
Installing the Micro SD Card	6	RTP Start and End Port	34
Installation Steps	7	Multicast Setting	34
Base Mount (Optional)	7	ONVIF	34
Bracket & Lens Adjustment	8	ONVIF	34
Preventing Foggy Lens	8	Security	34
Dome Cover Installation	8	RTSP Keepalive	35
PoE (Power Over Ethernet)	9	Bonjour	35
IP Assignment	10	LLTD	35
Install Active Control	14	Advanced	36
For users using IE 6.0 or above	14	HTTPS Setting	36
Another Method	16	Connection Types	37
LIVE VIDEO	17	Remove Existing Certificate	37
Full Screen Mode	18	Download Request	38
Live Video Panel	18	Created Request	38
Submenu	19	SNMP	40
CAMERA CONFIGURATION	21	Access List	42
System	21	QoS/DSCP	43
System Information	22	IEEE 802.1x	43
Server Information	22	PPPoE & DDNS	44
OSD Setting	23	PPPoE Setting	44
Time Setting	24	Send mail after PPPoE dialed	45
EasyLink (Optional)	24	DDNS Setting	45
User Management	26	State	45
Anonymous User Login	26	Server Settings	46
Universal Password	26	Mail Setting	47
Add User	26	FTP Setting	47
User List.....	26	Samba (Network Storage)	48
Default Account	27	Google Drive Setting	48
System Update	27	Dropbox Setting	52
Firmware Upgrade	27	A/V Settings	53
Reboot System	27	Image Setting	54
Factory Default	27	Privacy Mask.....	54
Setting Management	27	Image Setting.....	55
Save As a File.....	28	Day Profile & Night Profile	55
New Setting File.....	28	D-WDR & True-WDR	55
Network	29	Denoise 3D & 2D	57
IP Setting	30	Shutter Time	57
IP Assignment	30	Sense-Up	57
DHCP	30	AE Compensation	57
Static IP	30	AE Strategymode	57
IPv6 Assignment	30	Saturation	57
Manually setup the IPv6 address	30	AGC	57
DHCPv6	31	Low Lux Auto-adjust	57
Automatically generated IPv6 Address	31	Anti Fog	58
Port Assignment	31	Lens Distortion Correction	58
Web Page Port	31	Video Orientation	58
		Day & Night	58
		White Balance	60
		Default	60
		Video Setting	60



Video System.....	60
Input Resolution	60
Video System.....	61
TV Output	61
Corridor Mode.....	61
Streaming Setting: Basic Mode	63
Resolution	63
Profile	63
Quality	63
Video Frame Rate	63
Video Format.....	63
Stream Feature	64
RTSP Path.....	65
Streaming Setting: Advanced Mode	65
Bitrate Control Mode	65
Video Bitrate Limit: (32Kbps~8Mbps)	65
Video Quantitative: 1 (Low) ~10(High)	66
GOP Size	66
Snapshot Setting	66
3GPP Streaming Setting	66
Resolution.....	66
Video Bitrate.....	67
Video Frame Rate	67
Video Format.....	67
RTSP Path.....	67
Audio	67
IP Camera to PC.....	67
Adjust Volume	67
Sound Detection	68
Event List	69
Event Setting	70
Motion Detection	70
Tampering Detection.....	72
Record File	73
Record Time Setting.....	73
Network Dis-connected	74
Network IP Check.....	74
Schedule	75
Schedule	75
Profile	75
Profile(1,2,3) Name	75
Snapshot & Record	75
Record	75
Snapshot.....	76
Restart IP Camera Automatically.....	76
I/O Setup	77
I/O Connection.....	77
I/O PIN Definition	77
Input Setting.....	77
Log.....	78
Subject.....	78
Interval.....	78
Based on the schedule	78
Output Setting.....	78
Mode Setting.....	78
Log List	79
SD Card.....	80
Playback	80

Record	82
SD Management	84
Auto Deletion	84
Format SD Card	84
SD Card Files	85
Downloading the Files	85
Linking the Files.....	85
Copy to PC	85

NETWORK CONFIGURATION 87

Configuration I 87

Configuration II 87

Configuration III 88

FACTORY DEFAULT..... 89

UNIVERSAL PASSWORD 90

PACKAGE CONTENTS 93

MICRO SD CARD COMPATIBILITY (OPTIONAL) 94

PREFACE

This is a **2 Megapixel IR Vandal Dome IP Camera** with a built-in web server. The user can view real-time video via IE browser. It supports **H.264+**, **H.264** and **M-JPEG** video compression, providing smooth and high video quality. The video can be stored in Micro SD card and playback remotely.

With a user friendly interface, it is an easy-to-use IP camera for security applications.

PRODUCT SPECIFICATIONS

Main Features:

- 2 Megapixel IR Vandal Dome IP Camera
- H.264+/ H.264/ M-JPEG Compression
- ROI Function
- Advanced Smart Stream
- Digital Noise Reduction
- Power over Ethernet
- Wide Dynamic Range
- Day & Night Manual Switch Time Control
- Power over Ethernet
- IR LED Built-in 30M
- IR Cut Filter Mechanism
- IP66
- IK10
- Micro SD Card Backup (Optional)
- 2-way Audio
- Support iPhone/iPad/Android
- SDK for Software Integration
- Free Bundle 36 Ch Recording Software

Hardware	
CPU	Multimedia SoC
RAM	256MB
Flash	128MB
Image Sensor	1/2.9" Megapixel CMOS Sensor
Sensitivity	Color : 0.05 Lux (AGC ON) B / W : 0.01 Lux (AGC ON)
Sensitivity	Vari-focal Lens 2.8-12mm @ F1.4
View Angle	34~100°(H), 19~52 °(V)
Rotary axis angle	Pan : 355° Tilt : 70° Rotation : 180°
ICR	IR cut Filter Mechanism
I/O	1 DI / 1 DO
Video Output	Yes
Audio	G.711 (64K) and G.726 (32K, 24K) audio compression Input : External Audio in Output: External Line out, Support 2-way.
Power over Ethernet	Yes
Power Consumption	DC 12V Max: 5.0 W PoE Max: 6.3 W
Operating Temperature *IR ON: 50°C	-20°C ~ 60°C [*IR OFF]
S/N Ratio	50dB
Dimensions	137mm (Ø) x 102mm (H)
Weight	890 g
IR LEDs	
LEDs	High Power LEDs x4, 850nm
IR Distance	30M
Network	
Ethernet	10/ 100 Base-T
Network Protocol	IPv6, IPv4, HTTP, HTTPS, SNMP, SSL, TLS , DNS , ICMP, IGMP, ARP, SNTP, QoS/DSCP, CoS, IEEE 802.1X, RTSP/RTP/RTCP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, SAMBA, Bonjour, Google drive, Drop box, Onvif profile S
System	

Video Resolution[16:9]	1920x1080@30fps, 1280x720@30fps, 640x480@30fps, 320x240@30fps
Video Adjust	Brightness, Contrast, Hue, Saturation, Sharpness, AGC, Night Mode, DWDR, Flip, Mirror, Noise Reduction, Day&Night Adjustable
Features	ROI, Smart Stream, Advanced Smart Stream, Motion Detection, Privacy Mask, Anti Fog, Tampering Detection, Corridor Mode, Push Video , P2P(Optional)
Triple Streaming	Yes
Image Snapshot	Yes
Full Screen Monitoring	Yes
Privacy Mask	Yes, 3 different areas
Compression Format	H.264+/ H.264/ M-JPEG
Video Bitrates Adjust	CBR, VBR
Motion Detection	Yes, 3 different areas
Triggered Action	Mail, FTP, Save to SD card, DO, SAMBA , Dropbox , Google Drive
Pre/ Post Alarm	Yes, configurable
Security	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based authentication for network protection, QoS/DSCP
Firmware Upgrade	HTTP mode, can be upgraded remotely
Simultaneous Connection	Up to 10
Micro SD Card Management (Optional)	
Recording Trigger	Motion Detection, IP check, Network break down (wire only), Schedule, DI
Video Format	AVI, JPEG
Video Playback	Yes
Delete Files	Yes
Remote Browsing Requirement	
OS	Windows 10 , Microsoft IE 11.0 or above
Hardware Suggested	Intel Dual Core 2.8G,RAM, 4GB, Graphic card: 128MB
Mobile Support	iOS 8 or above, Android 4.4.2 or above.

***SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTIFICATION.**

PRODUCT INSTALLATION


Monitor Settings

Caution: This setting only applies to Windows 7 system users.



- a. Right-Click on the desktop. Select **Properties**



- b. Change color quality to highest (**32bit**).

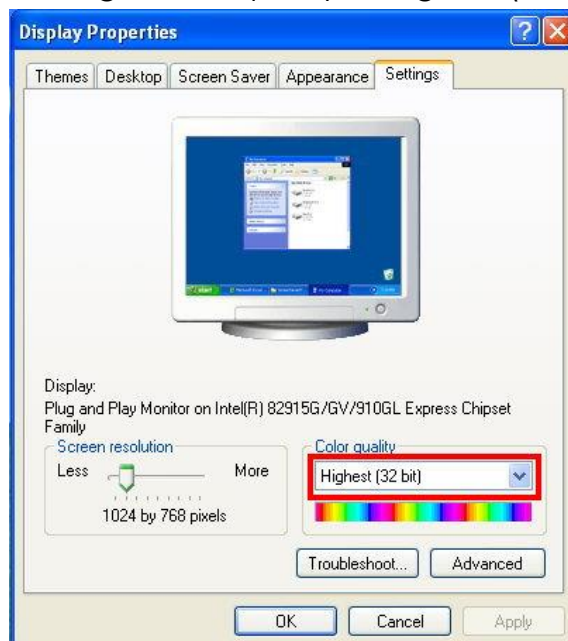


Hardware Installation

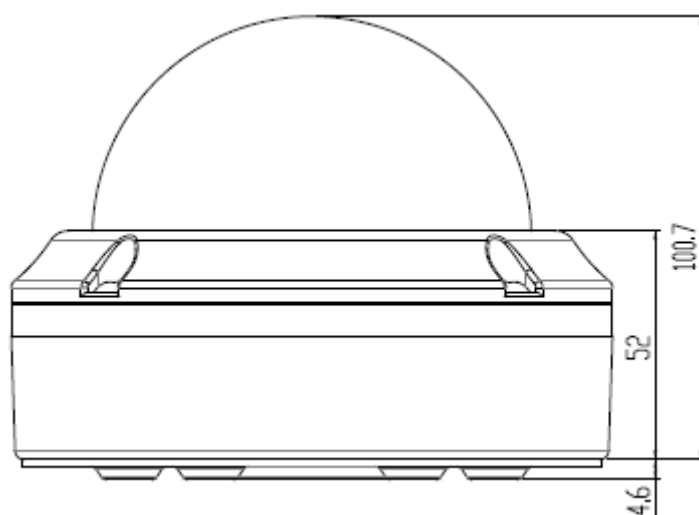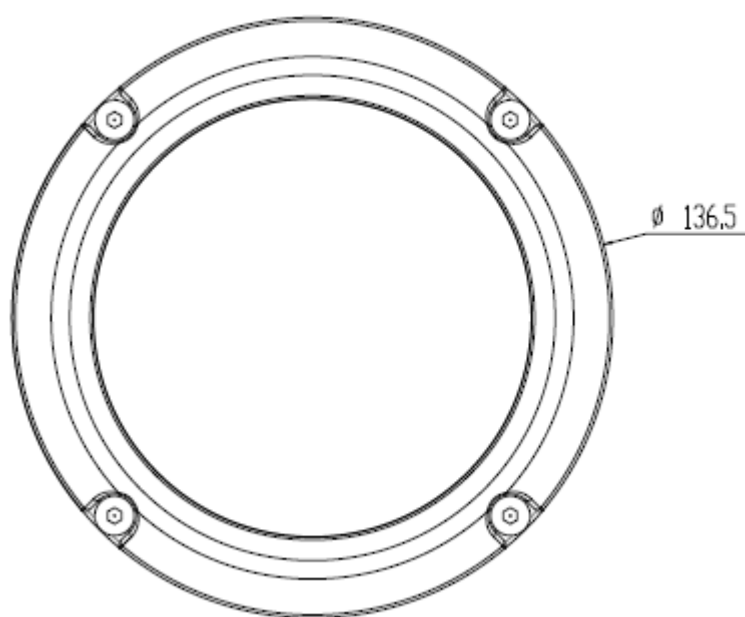


Connector Instruction

Set up configurations based on the network environment. For I/O setting, please refer to [I/O Configuration](#) chapter for more.

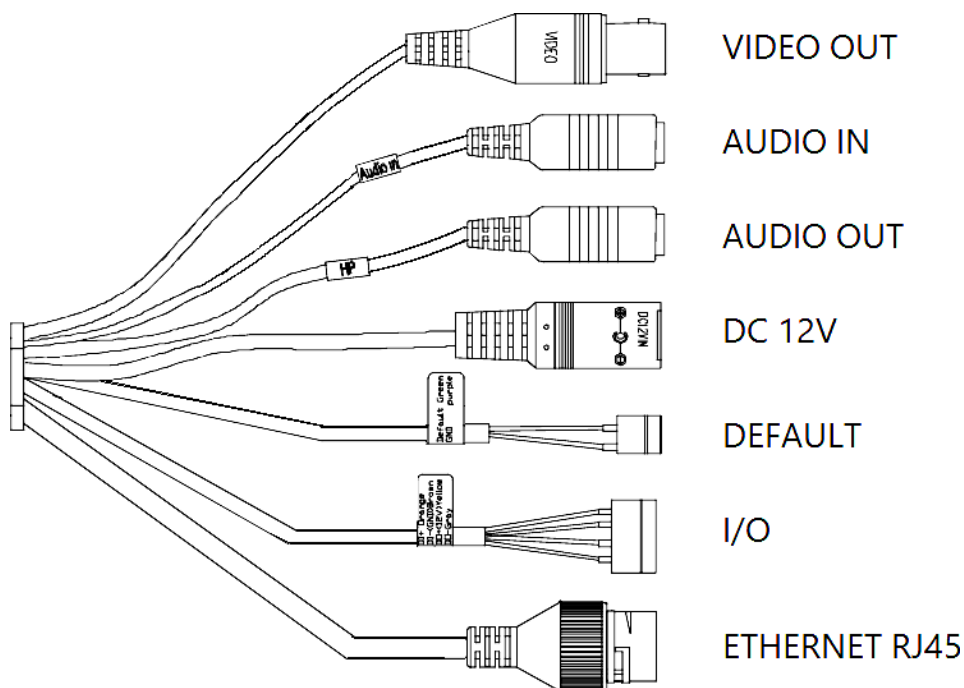

Installing the Micro SD Card


Find the MicroSD card slot which is attached with the lens module and other machine parts inside the camera.

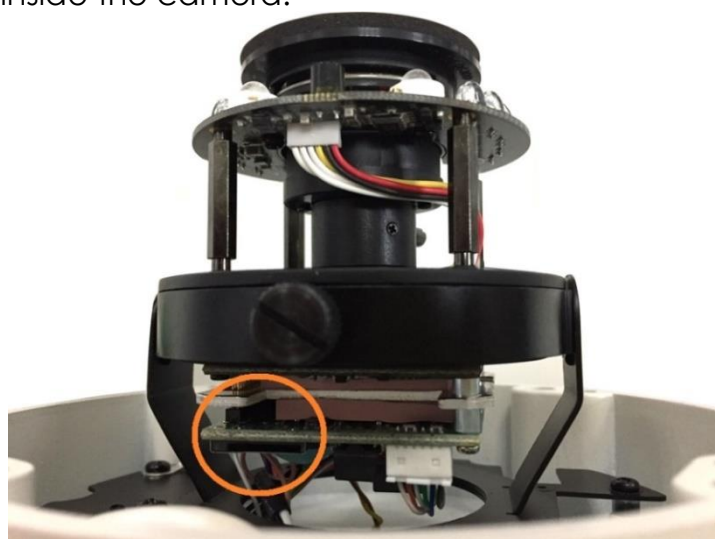


(Please refer to [Micro SD Card Compatibility](#) for choosing a compatible micro SD card or [SD Card](#) for setting up its functions from a network browser.)

Installation Steps

Base Mount (Optional)

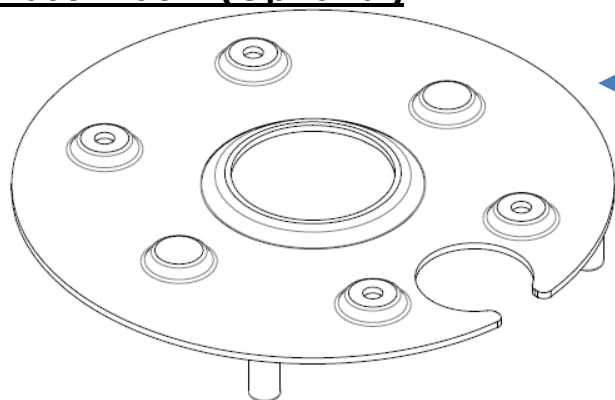


Mount the whole plate
unto the surface where
the installation takes
place first.

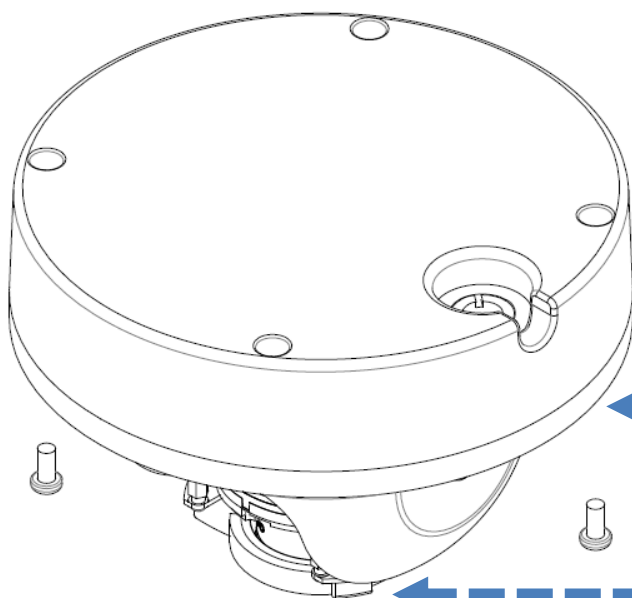

It is also recommended
that the surface where
you mount the camera is
smooth and closely flat
with the camera.

Match the gaps and the
screws with the plate
surface facing the
direction as the picture
depicts. Attach the
Camera body with the
Mounting Plate.

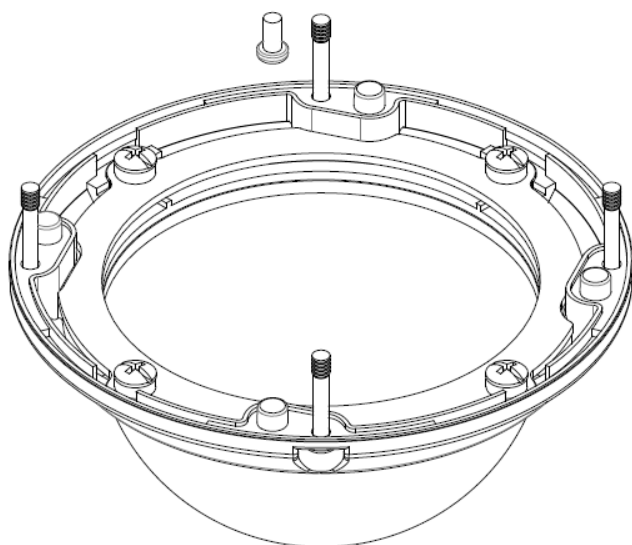


Adjust the 3 Axis Diagram.

Install the Dome Cover.

Bracket & Lens Adjustment

Adjust the 3-Axis bracket of the camera to appropriate angle.

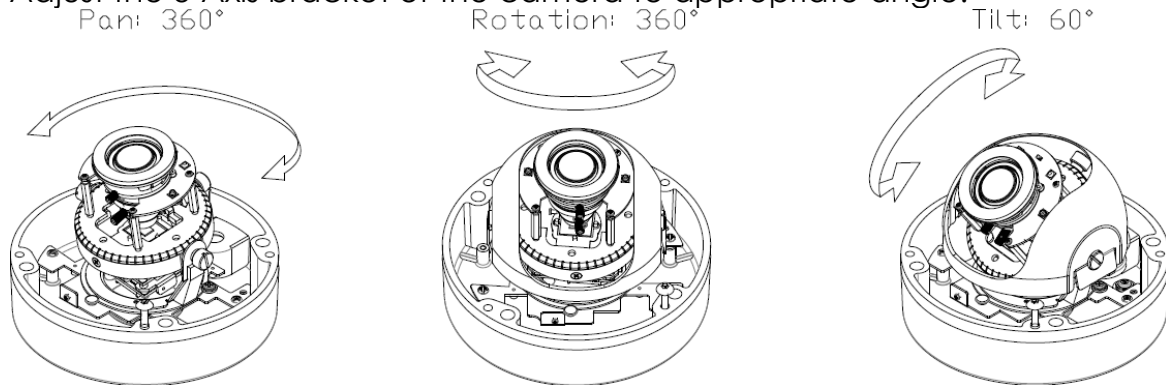

Preventing Foggy Lens

To avoid lens fog while the dome housing is open during installation, take out the Silica Gel from the small package and place it inside the dome to reduce the humidity level.



Dome Cover Installation

Make sure there are no cables around the screws, and slowly lock the four corners at the same time, applying equal force. Do not fully lock one screw at a time; otherwise the closing might not be equally thorough.




Before you close the dome cover, make sure that the black rubber edge sticks to the cover completely. Crooked or uneven conditions may cause the waterproof defective.



PoE (Power Over Ethernet)


802.3af, 15.4W PoE Switch is recommended (Optional)

Power over Ethernet (PoE) is a technology that integrates power into a standard LAN infrastructure. It allows providing power to a network device, such as an IP phone or a network camera, using the same cable for network connection. It eliminates the need for power outlets at the camera locations and enables easier application of uninterruptible power supplies (UPS) to ensure 24 hours a day, 7 days a week operation.

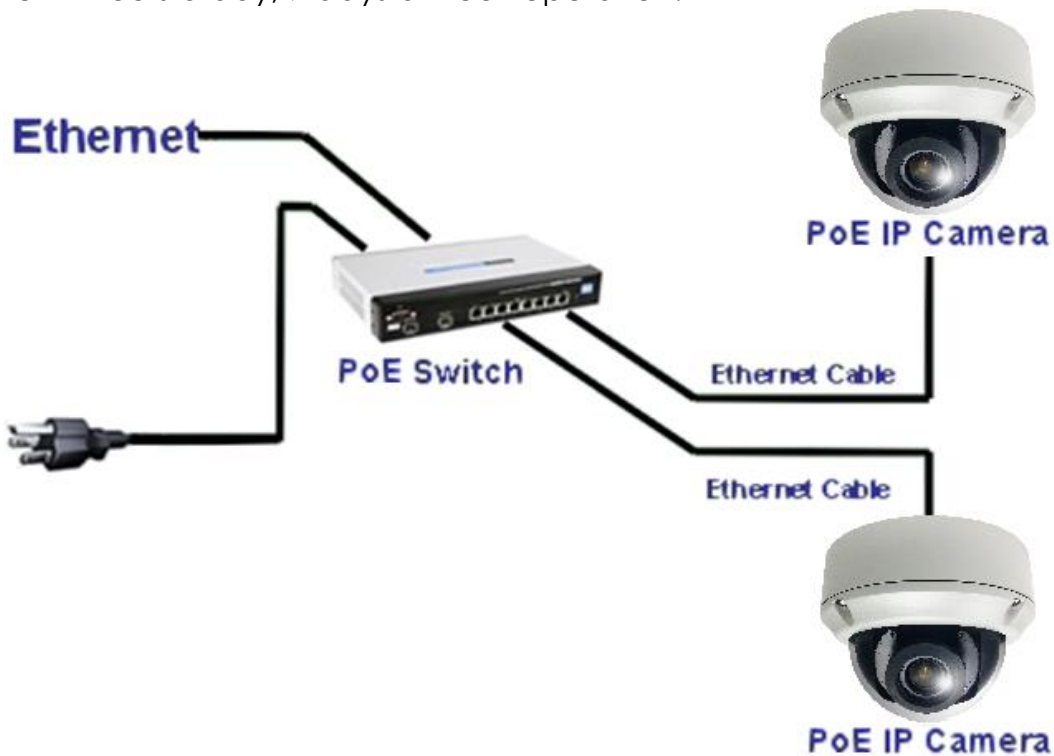


IP Assignment

- i. Open the software [IP Scanner](#) to assign the IP address of the IP Camera. Find it in [Applications](#) folder from the CD attached of the product package.
- ii. Execute the English version of **IP Scanner**: [IPScannerENG](#)
- iii. There are 3 kinds of IP configuration.
 - Fixed IP (Public IP or Virtual IP)
 - DHCP (Dynamic IP)
 - Dial-up (PPPoE)
- iv. For Windows XP SP2 or above, a Windows Security Alert may pop up. Choose the network type based on your surveillance environment, and click on **Allow access**.

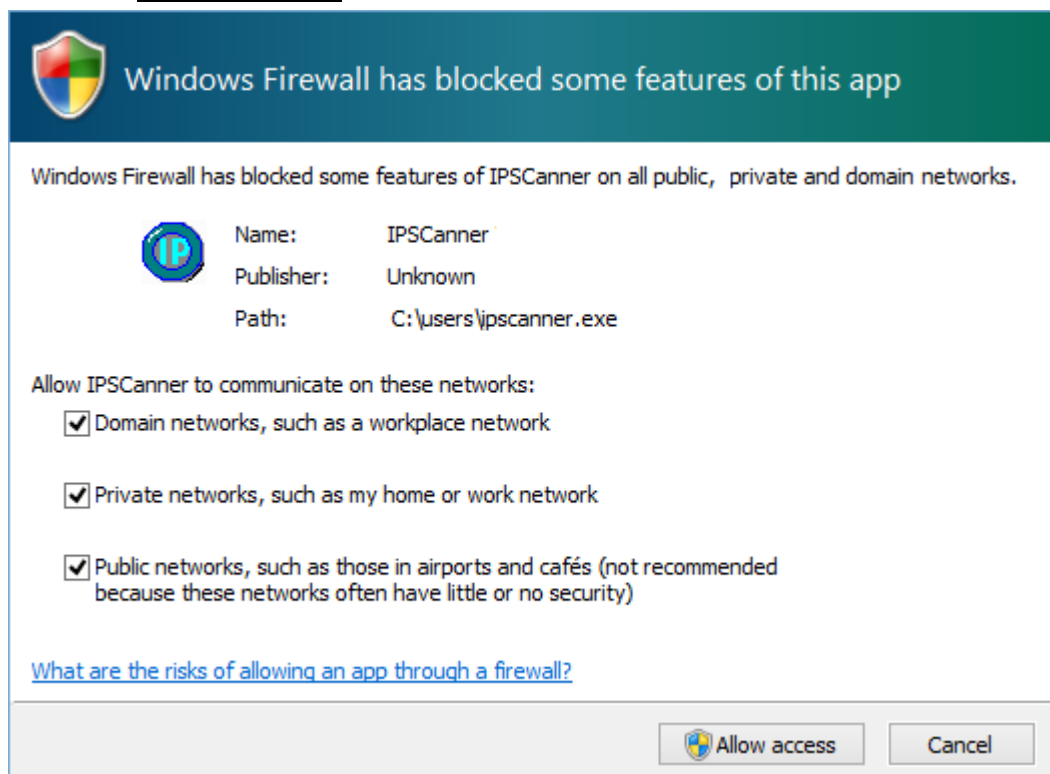

- v. **IP Scanner** will search for all the IP Cameras connected on the LAN. The user can click **Search IPCam** to search again.

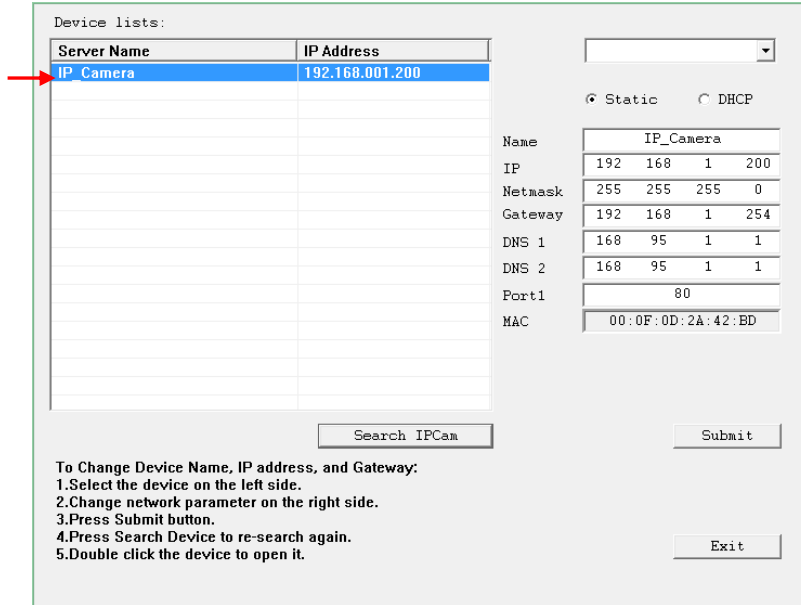

Device lists:

Server Name	IP Address
IP_Camera	192.168.001.200

Static ☒ DHCP ☐

Name: IP_Camera

IP: 192 168 1 200

Netmask: 255 255 255 0

Gateway: 192 168 1 254

DNS 1: 168 95 1 1

DNS 2: 168 95 1 1

Port1: 80


MAC: 00:0F:0D:2A:42:BD

Search IPCam Submit

To Change Device Name, IP address, and Gateway:
 1. Select the device on the left side.
 2. Change network parameter on the right side.
 3. Press Submit button.
 4. Press Search Device to re-search again.
 5. Double click the device to open it.

Exit

- vi. Click one of the IP Cameras listed on the left side. The network configuration of this IP camera will be shown on the right side once you highlight the device with your mouse. You can change the **name** of the IP Camera to your preference (e.g.: Office, warehouse). Change the parameters and click **Submit**.

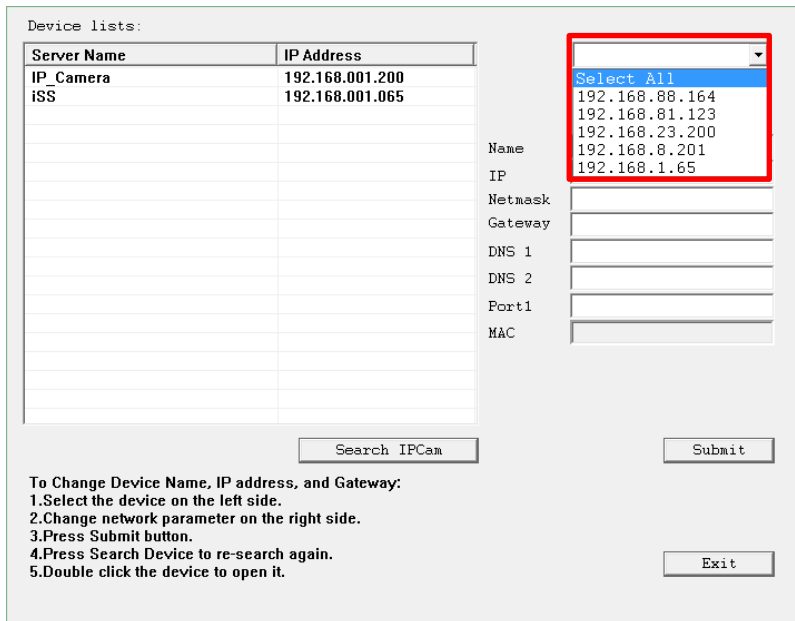

Device lists:

Server Name	IP Address
IP_Camera	192.168.001.200
iSS	192.168.001.065

Select All
 192.168.88.164
 192.168.81.123
 192.168.23.200
 192.168.8.201
 192.168.1.65

Name: IP_Camera

IP: 192 168 1 200

Netmask: 255 255 255 0

Gateway: 192 168 1 254

DNS 1: 168 95 1 1

DNS 2: 168 95 1 1

Port1: 80

MAC: 00:0F:0D:2A:42:BD

Search IPCam Submit

To Change Device Name, IP address, and Gateway:
 1. Select the device on the left side.
 2. Change network parameter on the right side.
 3. Press Submit button.
 4. Press Search Device to re-search again.
 5. Double click the device to open it.

Exit

You can select different network cards that you are currently connected to from the drop-down menu at the top right corner. You can also select the online device from a specific network card in **Device lists**, or choose **Select All** to include all network card devices in **Device lists**.

- vii. Please make sure the subnet of the PC IP address and the IP Camera IP address are the same.

The same Subnet

IP Camera IP address: 192.168.1.200

PC IP address: 192.168.1.100

Different Subnets

IP Camera IP address: 192.168.2.200


PC IP address: 192.168.1.100

To Change the PC IP address


Control Panel→Network Connections→Local Area Connection

Properties→Internet Protocol (TCP/IP) →Properties

Make sure your IP Camera and PC are in the same Subnet. If not, change the IP Camera subnet or the PC IP subnet accordingly below.

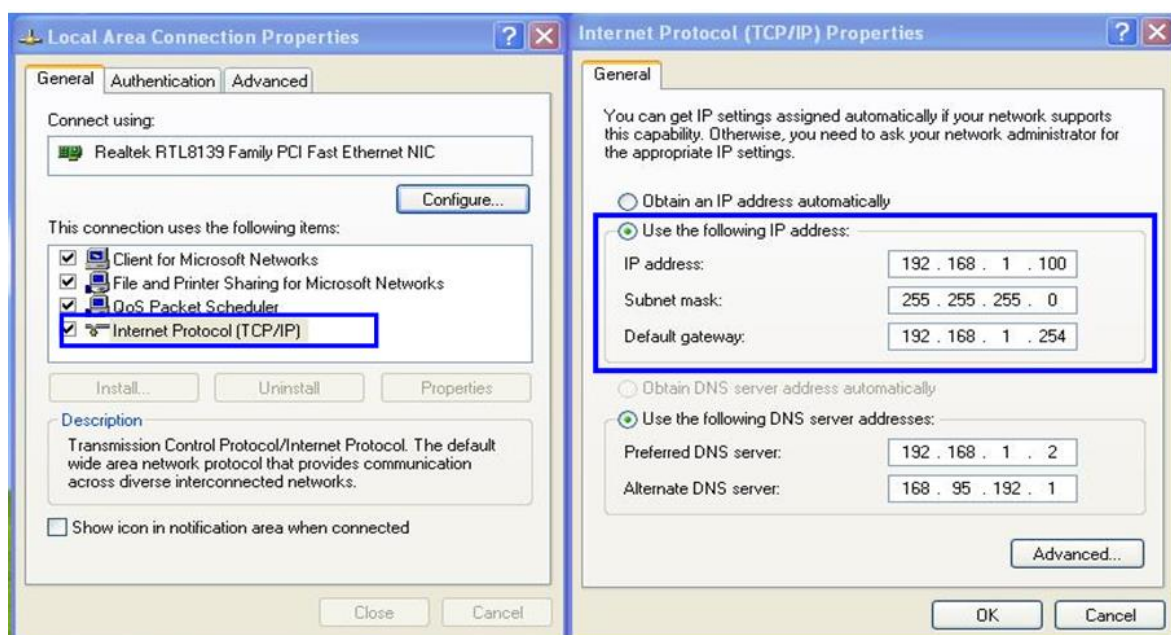

- viii. To quickly access remote monitoring, left-click the mouse twice on the selected IP Camera listed under **Device list** of **IP Scanner**.

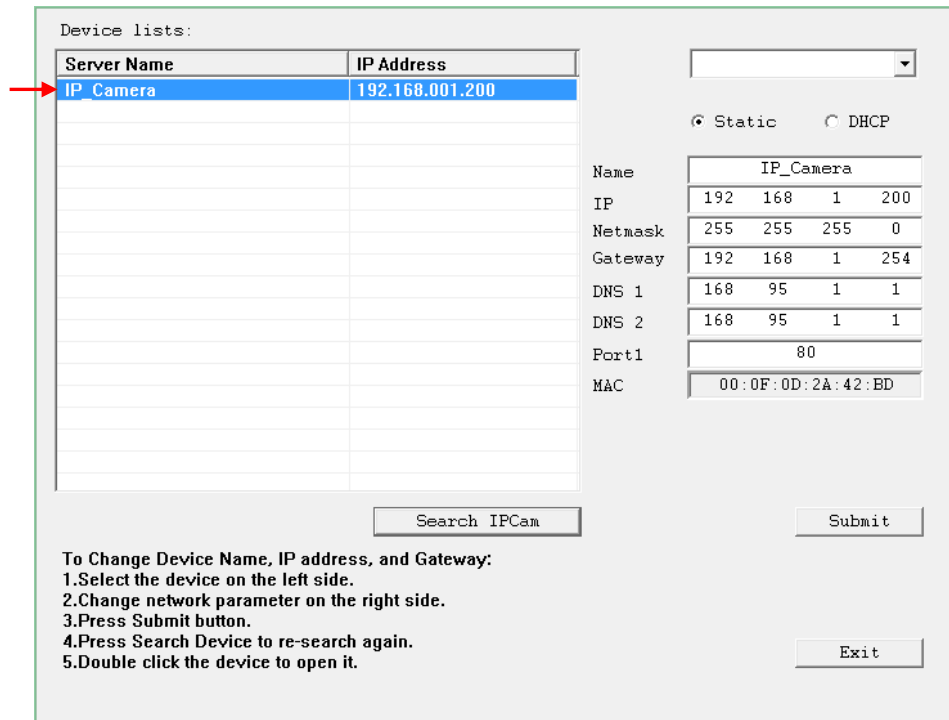

Device lists:

Server Name	IP Address
IP_Camera	192.168.001.200

Static ☒ DHCP ☐

Name: IP_Camera

IP: 192 168 1 200

Netmask: 255 255 255 0

Gateway: 192 168 1 254

DNS 1: 168 95 1 1

DNS 2: 168 95 1 1

Port1: 80


MAC: 00:0F:0D:2A:42:BD

Search IPCam Submit Exit

To Change Device Name, IP address, and Gateway:

1. Select the device on the left side.
2. Change network parameter on the right side.
3. Press Submit button.
4. Press Search Device to re-search again.
5. Double click the device to open it.

- ix. A default network browser of the camera control interface will open. Enter **admin** for both Username and Password to gain access.

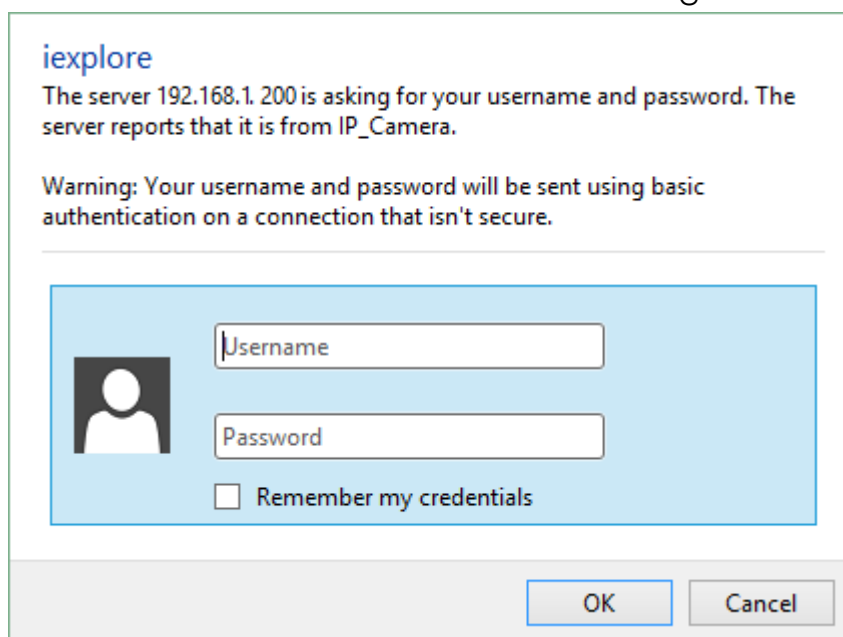

iexplore

The server 192.168.1.200 is asking for your username and password. The server reports that it is from IP_Camera.

Warning: Your username and password will be sent using basic authentication on a connection that isn't secure.

Username

Password

☐ Remember my credentials


OK Cancel

Install Active Control

For users using IE 6.0 or above

When viewing the camera video for the first time via IE, the browser will ask you to install the **ActiveX** component.

Choose '**Allow**'

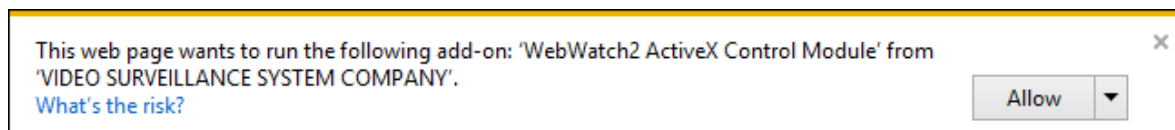

The ActiveX component should then be completed and user will be able to view the live video screen.


If the installation fails, please check the security settings in the IE browser.

Follow the steps below:


- 1) Go to **Start-Up Menu**  on the lower left corner of the **Windows**
- 2) Select **Control Panel** 
- 3) Double-click on  **Internet Options**.
- 4) You will then enter the page of **Internet Properties** settings.
- 5) Starting from **Internet Properties**, proceeding steps as below:

- Security → Custom Level → Security Settings → Download unsigned ActiveX controls → Enable or Prompt (recommended).
- Security → Custom Level → Security Settings → Initialize and script ActiveX controls not marked as safe → Enable or Prompt (recommended).


i

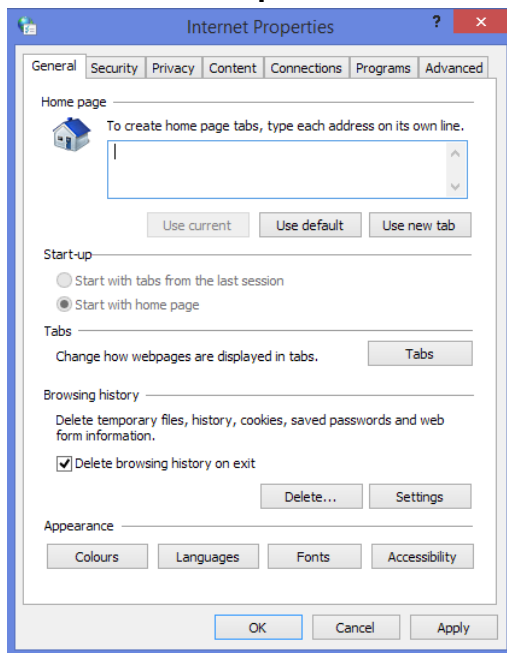


ii

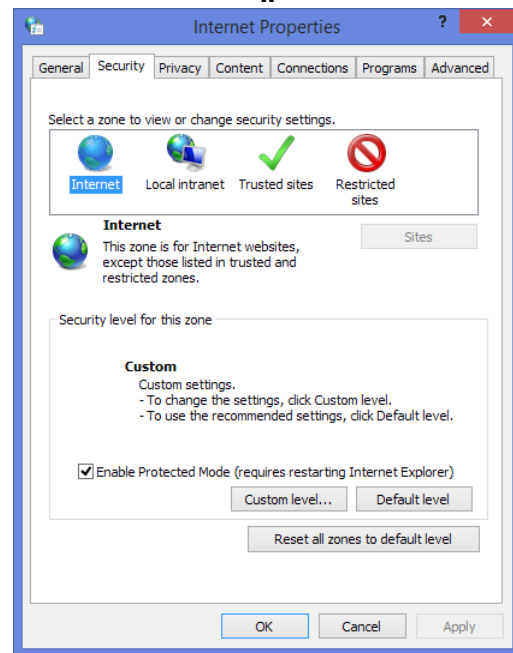

iii

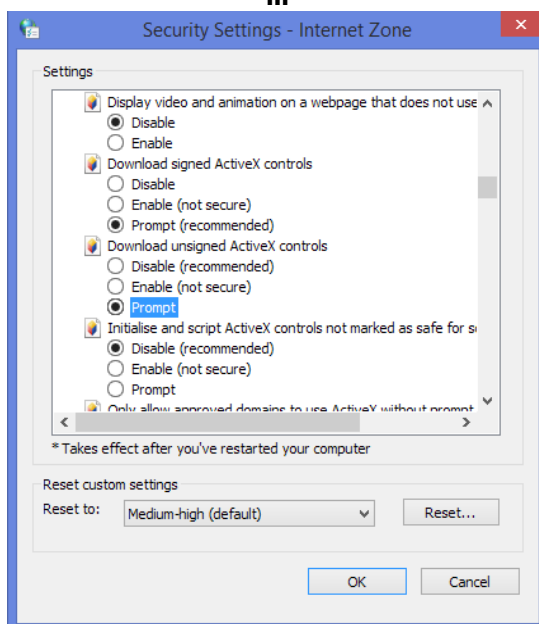


vi

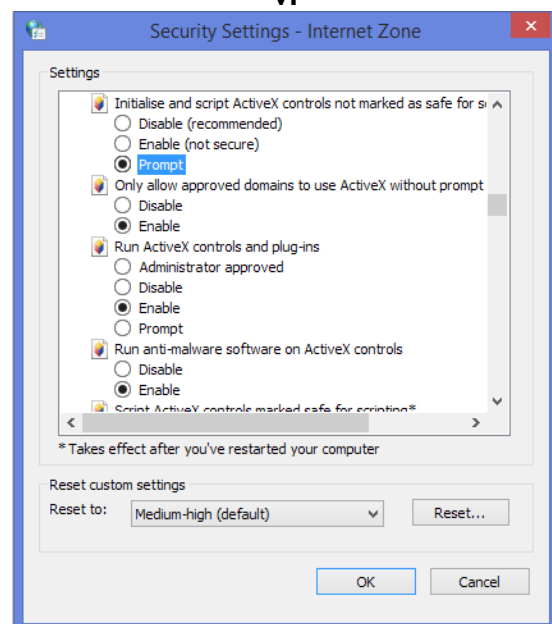


v

When popup the following dialogue box, click **Yes**.

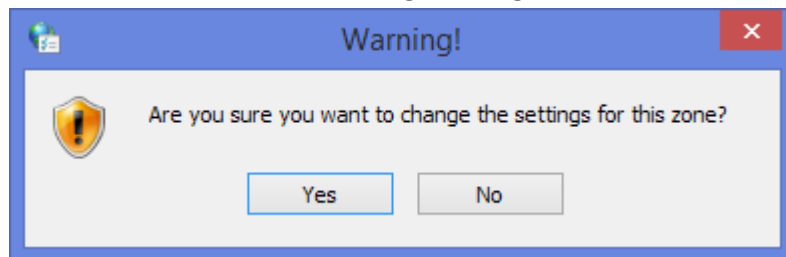

Another Method


Go to: IE→Tools → Internet Options... → Security Tab → Trusted sites → Add the IP address and click **OK**.

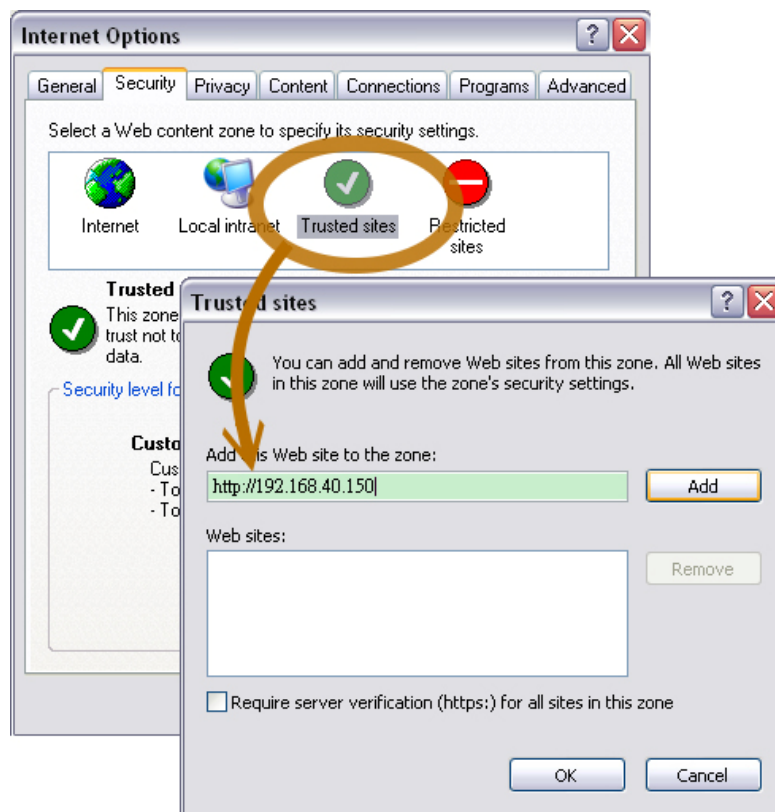

In the site list you can key in one single IP address or a LAN address. For example, if you add **192.168.21.***, all the IP address under **21.*** on the LAN will be regarded as trusted sites.

LIVE VIDEO

Once your [IP Assignment](#) has been completed, log in to the IP camera.

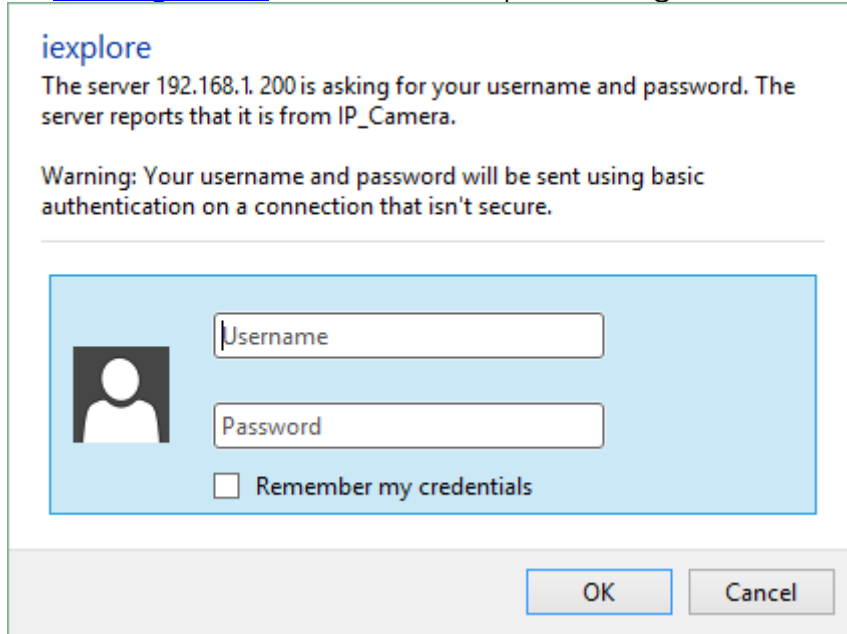

iexplore

The server 192.168.1. 200 is asking for your username and password. The server reports that it is from IP_Camera.

Warning: Your username and password will be sent using basic authentication on a connection that isn't secure.

Username

Password

☐ Remember my credentials

OK Cancel

When IP Camera is successfully connected it shows the following interface. Please refer to [Live Video Panel](#) for icons representing different functions.






Please change default password is a sign which flickers on the live view screen as a reminder, to suggest the user to change the default password. You may configure the login settings in [System](#) to secure your account privacy.

Full Screen Mode


Double-clicking on the video screen will enter the full screen mode. Press “Esc” on your computer keyboard or double-click the video screen again for returning to normal screen mode.

Live Video Panel


- Click  - Get into the administration page.
- Click  - A snapshot preview window will appear.
Choose  to save the current snapshot or choose  to discard it.
- Show the system time, video resolution, and other information.

-  - Adjust image size by its ratio of 1/2x(default), 1x, and 2x.
-  - Select the video streaming source: If the streaming 2 is set closed in [Video Setting](#), this function will not be displayed.

- Tick on **Chatting** checkbox to enable two-way audio. You may adjust settings from [Audio Setting](#).
- **Online Visitor:** Shows how many people are connected to this device.
-  - Control the external output device or DO (digital output) connected to this camera.

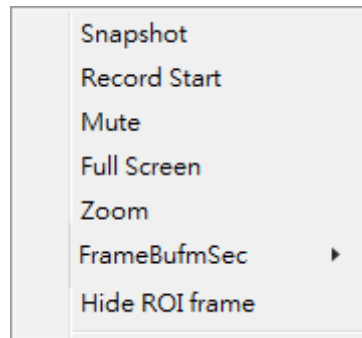Submenu


Right-Click the mouse on the live video screen, a pop-up menu will then appear as below.

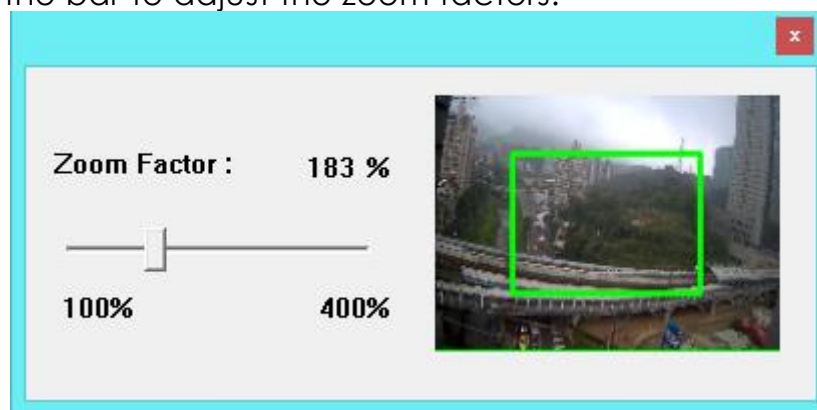

- i. **Snapshot**: Save a JPEG picture
- ii. **Record Start**: Record the video to the local PC. The video format is AVI and you will be asked to set up the directory for the video file. To stop recording, right-click again. Select "Record Stop".
- iii. **Mute**: Click to turn off the audio. Click again to turn it on.
- iv. **Full Screen**: Full-screen mode.
- v. **Zoom**: Select "zoom" within the pop-up dialogue box and then drag and drop the bar to adjust the zoom factors.




- vi. **Frame Buffm Sec**: This function aims to build a temporary buffer to accumulate several video frames in a LAN network environment. It can make video streaming smooth when the network speed is slow.

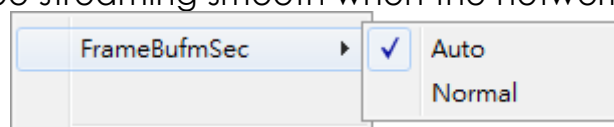

Select **Auto** to allow this function automatically help fix the streaming performance whenever the video happens to be lagging.

Select **Normal** to play the video data based on the current network streaming performance. (Note: the lagging of the video displayed will not be seen as a result of the actual video data)

- vii. **Hide / Show ROI frame:** Once the ROI frame has been set up from [AV Settings](#), there will be frames in colors appearing on the live view. Choose to hide to make the frames invisible, or choose show to keep the frames.

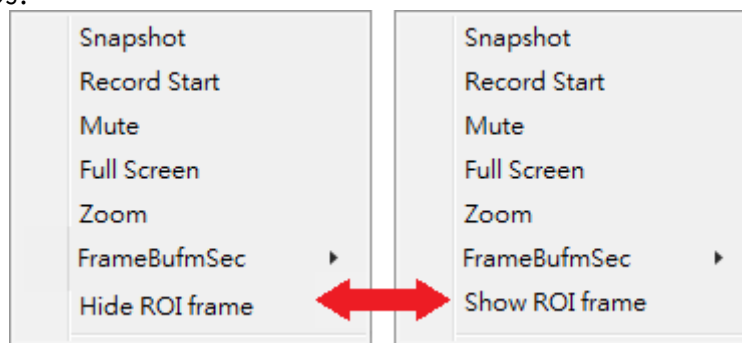

CAMERA CONFIGURATION

System



Click  to get into the administration page. Click the [live video](#) page.



to go back to the [live video](#) page.



The screenshot shows the IP Camera Configuration Web Interface. On the left is a dark sidebar with a menu. The main area on the right is titled 'System Information' and contains several configuration sections.

Sidebar Menu:

- System Information
- User Management
- System Update
- IP Setting
- Advanced
- PPPoE & DDNS
- Server(Mail,FTP...)
- Network
- Image Setting
- Video Setting
- A/V Setting
 - Audio
- Event Setting
- Schedule
- I/O Setting
- Log List
- Event
 - SD Card

Main Configuration Area:

System Information

Server Information

MAC Address: 00:0F:8D:28:92:B0

Server Name: IP_Camera ☐ Status Bar

Language: ☒ English ☐ 繁體中文 ☐ 简体中文 ☐ French
☐ Russian ☐ Italian ☐ Spanish ☐ German
☐ Portuguese ☐ Polish ☐ Japanese

OSD Setting

Time Stamp: ☐ Enabled ☒ Disabled

Text: ☐ Enabled ☒ Disabled

OSD_Display [Text Edit](#)

Time Setting

Server Time: 2018/1/12 0:26:04 Time Zone: GMT+08:00

Date Format: ☒ yy/mm/dd ☐ mm/dd/yy ☐ dd/mm/yy

Time Zone: GMT+08:00

☐ Enable Daylight Saving:

☐ NTP :

NTP Server: pool.ntp.org

Update: 6 Hour

Time Shift: 0 Minutes [-1440..1440]

☐ Synchronize with PC's time

Date: 2018/4/11

Time: 15:46:54

☐ Manual

Date: 2018/4/11

Time: 15:46:51

☒ The date and time remain the same

[Apply](#)

System Information

Server Information

Set up the camera name, language, and the camera time for displaying on [live video](#) mode.




The screenshot shows a 'Server Information' configuration window. It contains the following fields and options:

- MAC Address:** A text box containing '00:0F:0D:2C:89:FE'.
- Server Name:** A text box containing 'Camera'.
- Status Bar:** An unchecked checkbox.
- LED Indicator:** Two radio buttons, 'ON' (selected) and 'OFF'.
- Language:** A group of radio buttons for selecting a language: English (selected), 繁體中文, 简体中文, French, Russian, Italian, Spanish, German, Portuguese, Polish, and Japanese.

- **MAC Address:** The given identification specifically assigned for each camera model. Every MAC address is different, and cannot be modified.
- **Server Name:** This is the Camera name which will also be shown on [IP Scanner](#). Tick the checkbox of **Status Bar** and click **Apply** at the right bottom of the page to display the **Server Name** in [live video](#). For example, if you input **DEMO**, then the word **DEMO** will be displayed at live video mode at the bottom.

DEMO SEP/17/2018 13:52:25 H.264+ Size:3840x2160

- **LED Indicator:** Turn on/off the LED indicator on the camera.
- **Language:** English and other languages can be selected. When a language preference is selected, the following dialogue box will pop up to confirm the change.

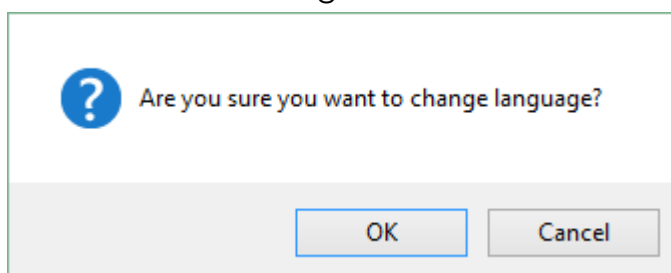

OSD Setting

You can adjust the **Position** for the **Enabled** option of **Time Stamp** or **Text** which will be displayed on [live video](#) screen.

OSD Setting

Time Stamp: ☐ Enabled ☒ Disabled

Text: ☐ Enabled ☒ Disabled

OSD_Display [Text Edit](#)

Click **[Text Edit](#)** to edit the OSD content which is defaulted as **OSD_Display**.

Text Edit



Text Edit

Text

Size ▼

Transparency ▼

Upgrade

Text: Input the arbitrary content of the OSD on [Live video](#) screen.

Size: Adjust the size of the OSD text on [Live video](#) screen.

Transparency: Adjust the transparency of the OSD text on [Live video](#) screen.

Click the **Upgrade** button to apply settings.

Time Setting

Time Setting

Server Time: 2015/7/28 12:43:57 Time Zone: GMT+08:00

Date Format:
☒ yy/mm/dd
☐ mm/dd/yy
☐ dd/mm/yy

Time Zone:

☒ Enable Daylight Saving:

DST Start:

Month

Mar

2nd

Day of Week

Sun

Time

12 am

DST End:

Month

Nov

1st

Day of Week

Sun

Time

12 am

☐ NTP :

NTP Server :

Update : Hour

Time Shift : Minutes [-1440..1440]

☐ Synchronize with PC's time

Date :

Time :

☐ Manual

Date :

Time :

☒ The date and time remain the same

Assign the formation to display **Year/Month/Date** on [Live video](#) screen, as well enable **Daylight Saving** and other options.

EasyLink (Optional)

EasyLink

EasyLink ID:


QR Code:



Install **IP Motion App** on your mobile phone to access **EasyLink** operation which allows user to watch IP camera live view on self-owned mobile phones. Once the installation is done, either enter the **EasyLink ID** from the IP camera web browser, or simply scan the **QR Code** to help you log in to your IP camera through **IP Motion App** and watch the live view.


24

For iOS

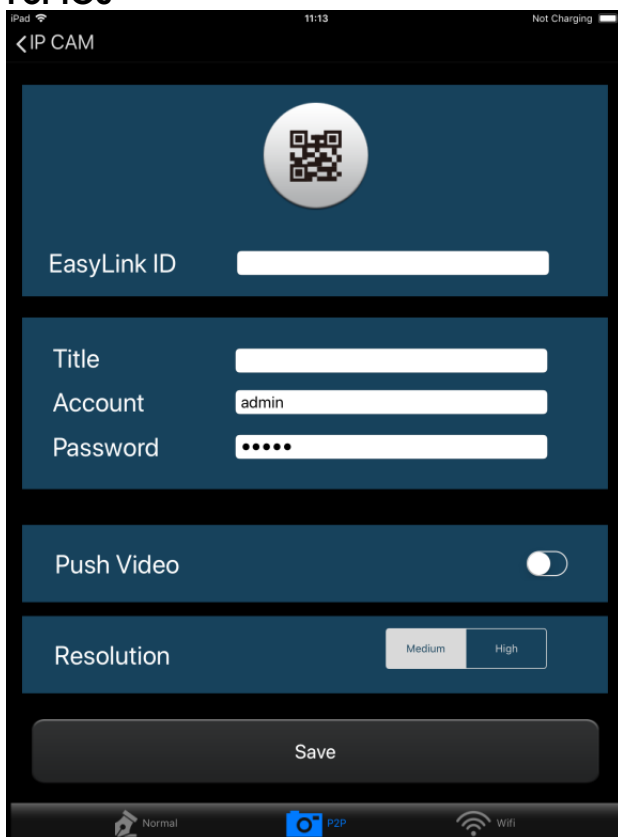

The screenshot shows the iOS interface of the IP Motion App. At the top, it says "iPad" and "11:13". The status bar indicates "Not Charging". The app title is "< IP CAM". The main screen features a QR code scanner at the top. Below it is a form with fields for "EasyLink ID", "Title", "Account" (pre-filled with "admin"), and "Password" (masked with dots). There is a "Push Video" toggle switch and a "Resolution" selector with "Medium" and "High" options. A "Save" button is at the bottom. The bottom navigation bar shows "Normal", "P2P" (selected), and "Wifi" icons.

For Android

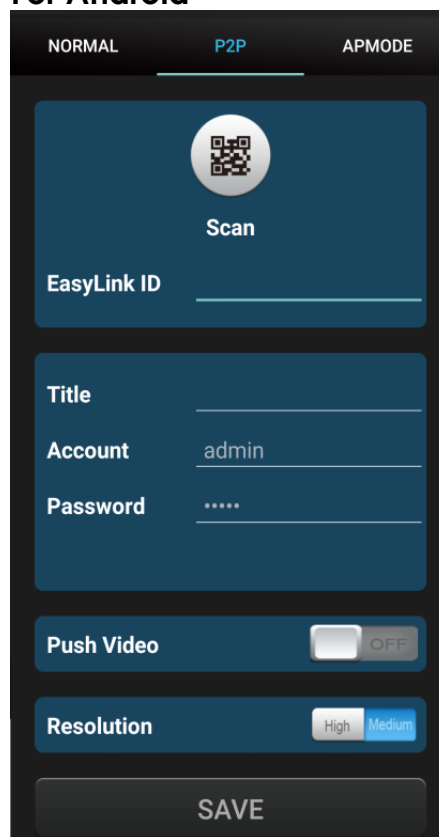

The screenshot shows the Android interface of the IP Motion App. At the top, there are tabs for "NORMAL", "P2P" (selected), and "APMODE". The main screen features a QR code scanner at the top. Below it is a form with fields for "EasyLink ID", "Title", "Account" (pre-filled with "admin"), and "Password" (masked with dots). There is a "Push Video" toggle switch set to "OFF" and a "Resolution" selector with "High" and "Medium" options. A "SAVE" button is at the bottom.

Read more about operating **IP Motion App** from the user's manual document inside the folder [User Manual Mobile Phone APP](#) which comes as part of the **CD contents**.

Note: Your smartphone must be equipped with a camera and featured with a QR code scanner application.

User Management

User Management

Anonymous User Login

☒ YES
 ☐ NO

Universal Password (differs by IP Address)

☒ YES
 ☐ NO

Setting

Add User

Username:
 Password:
 Confirm:

Add/Set

User List

Username	User Group	Modify	Remove
admin	Administrator	Edit	-----
grace	Guest	Edit	Remove

Default Account

☐ Show reminder message [Please change IP Cam default password]

Anonymous User Login

Select **Yes** for allowing access to watch live video of the IP camera without having to enter username and password. Yet when entering the configuration page of the IP camera, the system will do otherwise. Select **No** for requiring a username and login to access the camera.

Universal Password

Select **Yes** for allowing login to this IP camera by universal password. Please refer to [Universal Password](#) chapter for more explanations. Select **No** for disabling universal password.

Add User

The IP Camera supports 2 different users: **Administrator** and **Guest**.

Administrator can operate everything. **Guest** has the right to access [Live view](#), Time sync, location setting, playback viewing and check playlist.

User List


Type the user name and password, then click **Add/Set**. The guest user can only browse live video page and is not allowed to enter the configuration page. Click **Edit** or **Remove** in the user list to modify them. The system will ask

you to input the password in the pop-up window before you edit the user information.

Default Account

Please change default password is a sign which appears on the live view screen as a reminder, suggesting the user to change the default password. Click the checkbox to enable/disable the reminder message.

System Update

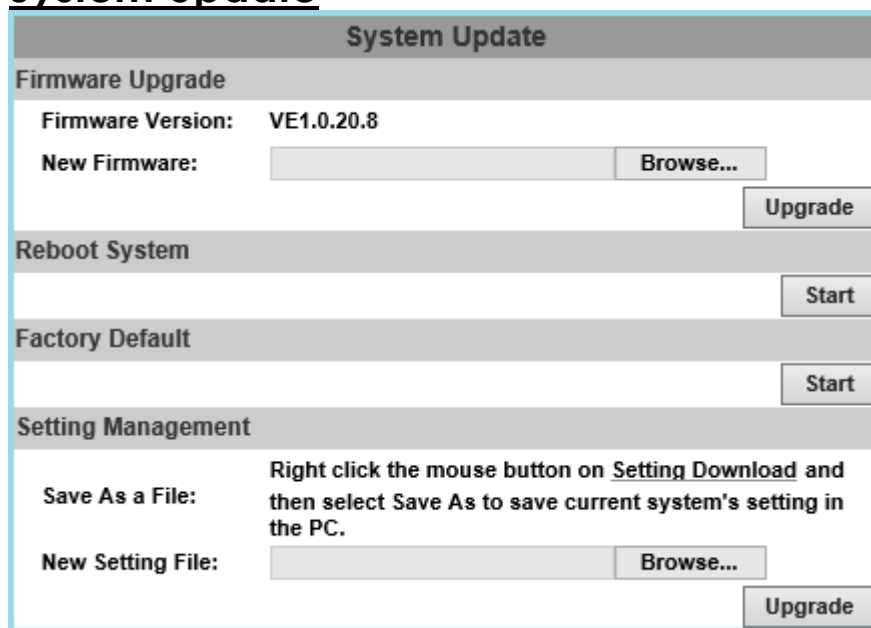

The screenshot shows a web interface titled "System Update". It contains four main sections: "Firmware Upgrade", "Reboot System", "Factory Default", and "Setting Management".

- Firmware Upgrade:** Shows "Firmware Version: VE1.0.20.8". Below it is a "New Firmware:" label followed by a text input field and a "Browse..." button. To the right of the input field is an "Upgrade" button.
- Reboot System:** A section with a "Start" button.
- Factory Default:** A section with a "Start" button.
- Setting Management:** Contains a "Save As a File:" label and a text area with instructions: "Right click the mouse button on Setting Download and then select Save As to save current system's setting in the PC." Below this is a "New Setting File:" label, a text input field, and a "Browse..." button. To the right of the input field is an "Upgrade" button.

Firmware Upgrade

To update the firmware online, click **Browse...** to select the firmware, and then click **Upgrade** to proceed.

Reboot System

Restart the IP camera.

Factory Default

Restore all the settings of this IP camera to its initial default status.

Setting Management

The user can download the current settings to PC, or upgrade from previous saved settings.

Save As a File

Right-click the mouse button on **Setting Download** → Select **Save AS...** to save current IP Camera settings in PC → Select saving directory → Save

New Setting File

To upgrade new settings, click **Browse** to search previous settings from a pop-up window, then click **Open** → **Upgrade** → Settings update confirm. Finally, click [index.html](#). to returning to main page.

Network

Click  to get into the administration page. Click  to go back to the [live video](#) page.



The screenshot shows the IP Camera web interface. On the left is a sidebar menu with categories: System, Network, and A/V Setting. The 'Network' category is selected, showing options like IP Setting, Advanced, PPPoE & DDNS, and Server(Mail,FTP...). The main content area is titled 'System Information' and contains several sections: Server Information (MAC Address, Server Name, Language), OSD Setting (Time Stamp, Text), Time Setting (Server Time, Date Format, Time Zone, Daylight Saving, NTP, Synchronize with PC's time, Manual), and an 'Apply' button at the bottom right.

System Information

Server Information

MAC Address: 00:0F:0D:28:92:B0

Server Name: IP_Camera ☐ Status Bar

Language: ☒ English ☐ 繁體中文 ☐ 简体中文 ☐ French
☐ Russian ☐ Italian ☐ Spanish ☐ German
☐ Portuguese ☐ Polish ☐ Japanese

OSD Setting

Time Stamp: ☐ Enabled ☒ Disabled

Text: ☐ Enabled ☒ Disabled

OSD_Display [Text Edit](#)

Time Setting

Server Time: 2018/1/12 0:26:04 Time Zone: GMT+08:00

Date Format: ☒ yy/mm/dd ☐ mm/dd/yy ☐ dd/mm/yy

Time Zone: GMT+08:00

☐ Enable Daylight Saving:

☐ NTP:

NTP Server: pool.ntp.org

Update: 6 Hour

Time Shift: 0 Minutes [-1440..1440]

☐ Synchronize with PC's time

Date: 2018/4/11

Time: 15:46:54

☐ Manual

Date: 2018/4/11

Time: 15:46:51

☒ The date and time remain the same

[Apply](#)

Enter the Network by clicking on titles from IP Setting, Advanced, PPPoE & DDNS and Server Settings.

IP Setting

IP Assignment

The IP Camera supports DHCP and static IP.

IP Setting	
IP Assignment	
☐ DHCP	
☒ Static	
IP Address:	192.168.1.200
Subnet Mask:	255.255.255.0
Gateway:	192.168.1.254
DNS 0:	168.95.1.1
DNS 1:	168.95.192.1

DHCP

The IP Camera will get all the network parameters automatically.

Static IP

Type-in the IP address subnet mask, gateway, and DNS.

IPv6 Assignment

By enabling DHCPv6 you can configure the following IPv6 address settings:

IPv6 Assignment	
☒ IPv6 Enabled:	
☒ Manually setup the IPv6 address:	
IPv6 Address/Prefix:	:: / 64
IPv6 Gateway:	::
IPv6 DNS:	::
DHCPv6:	☐ Enabled ☒ Disabled
IPv6 Address: fe80::20f:dff:fe00:284d	

Manually setup the IPv6 address

Key-in the Address, Gateway, and DNS.


DHCPv6

If you have a DHCPv6 server, enable it to assign the IPv6 automatically. The assigned IP address will be displayed alongside.

Automatically generated IPv6 Address

Indicates a virtual IPv6 address automatically generated by the IP camera. This virtual IPv6 address cannot be used on WAN.

Use IPv6 address to access the IP camera. Open a web browser and input **[IPv6 address]** in its address bar. The **[]** parentheses mark is necessary.

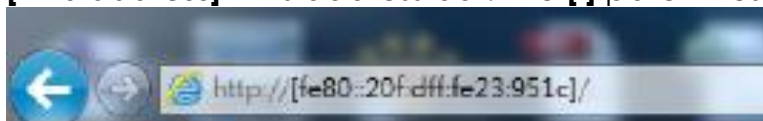

Port Assignment

The user might need to assign a different port to avoid conflicts when setting up the IP.

Port Assignment	
Web Page Port:	80
HTTPS Port:	443 HTTPS Setting

Web Page Port

Setup the web page connecting port and video transmitting port (Default: 80)

HTTPs Port

Setup the https port(Default: 443)

UPnP

UPnP	
UPnP:	☒ Enabled ☐ Disabled
UPnP Port Forwarding:	☐ Enabled ☒ Disabled
External Web Port:	80
External HTTPS Port:	443
External RTSP Port:	554

This IP camera supports UPnP, if this service is enabled on your computer, the camera will automatically be detected and a new icon will be added to **My Network Places**.

UPnP Port Forwarding:

Enable UPnP Port Forwarding for accessing the IP Camera from the Internet; this option allows the IP Camera to open ports on the router automatically so that video streams can be sent out from a LAN. There are three external ports for being set: **Web Port**, **Http Port** and **RTSP** port. To utilize of this feature, make sure that your router supports **UPnP** and is activated.


Note: UPnP must be enabled on your computer.
Please follow the procedure to activate UPnP:

<Approach 1>


- i. Open the **Control Panel** from the **Start Menu**
- ii. Select **Add/Remove Programs**
- iii. Select **Add/Remove Windows Components** & open **Networking Services** section
- iv. Click **Details** and select **UPnP** to setup the service.
- v. The IP device icon will be added to **My Network Places**.
- vi. The user may double click the IP device icon to access IE browser

<Approach 2>

- i. Open My **Network Space**
- ii. Click **Show icons for networked UPnP devices** in the tasks column on the left.

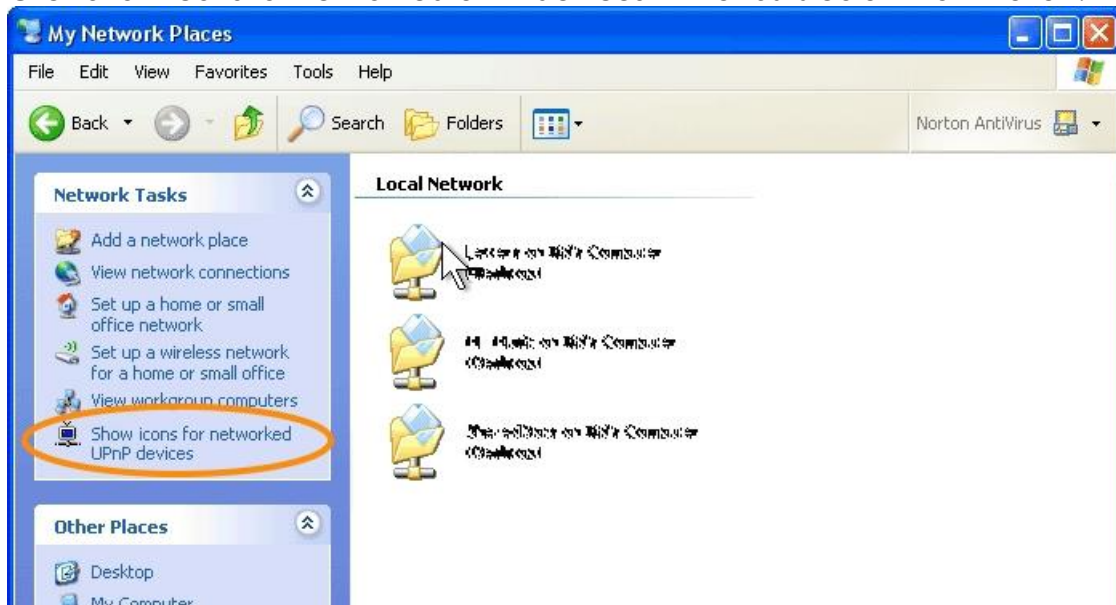

- iii. Windows might ask your confirmation for enabling the components. Click **Yes**.
- iv. Now the IP device is displayed under the LAN.
- v. Double-click the icon to access the camera via web browser.
- vi. Click **Hide icons for networked UPnP devices** on the left to disable UPnP.

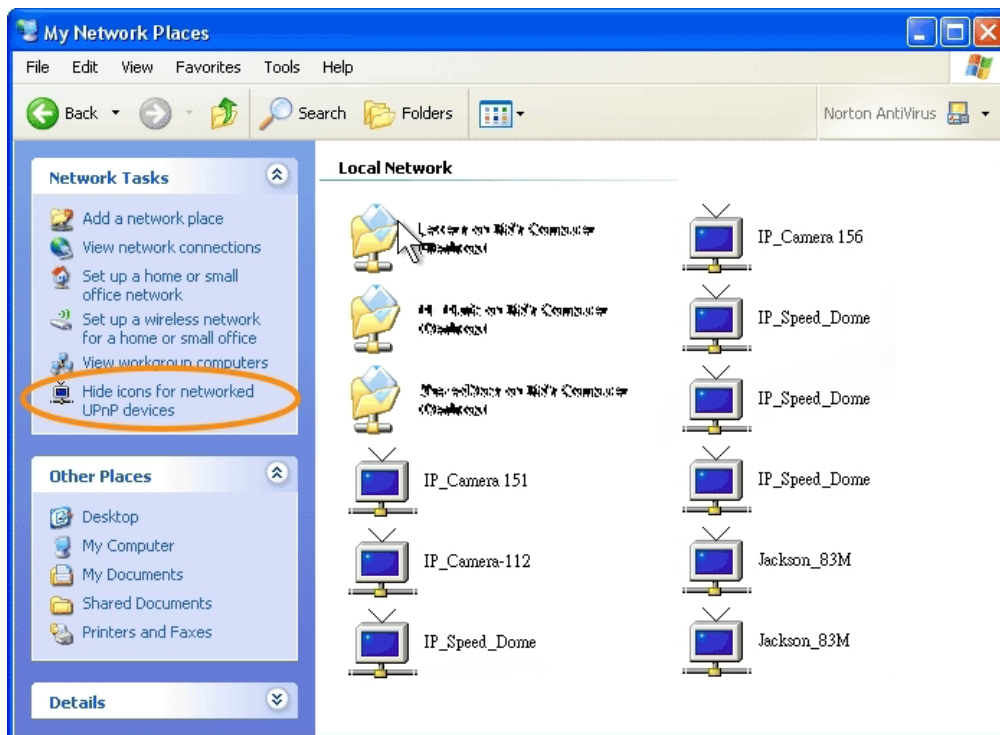

RTSP Setting

RTSP Setting		
RTSP Server:	☒ Enabled	☐ Disabled
RTSP Authentication:	Disable ▼	
RTSP Port :	554	
RTP Start Port:	5000	[1024..9997]
RTP End port:	9000	[1027..10000]

If you have a media player that supports RTSP protocol, you can use it to receive video streaming from the IP camera. The RTSP address can be set for two streaming transmissions respectively.

RTSP Server

Choose Enabled or Disabled.

Disable means everyone who knows your camera IP Address can link to your camera via RTSP. No username and password are required. Under Basic and Digest authentication mode, the camera asks for a username and password before allows access. The password is transmitted as a clear text under basic mode, which provides a lower level of security than under digest mode. Make sure your media player supports the authentication schemes.

RTSP Port

Setup port for RTSP transmitting (Default: 554)

RTP Start and End Port

In RTSP mode, you can use TCP and UDP for connecting. TCP connection uses RTSP Port (554). UDP connection uses RTP Start & End Port.

Multicast Setting (Based on the RTSP Server)

Multicast Setting (Based on the RTSP Server)		
Streaming 1:		
IP Address:	234.5.6.78	[224.3.1.0 ~ 239.255.255.255]
Port:	6000	[1 ~ 65535]
TTL:	15	[1 ~ 255]
Streaming 2:		
IP Address:	234.5.6.79	[224.3.1.0 ~ 239.255.255.255]
Port:	6001	[1 ~ 65535]
TTL:	15	[1 ~ 255]

Multicast is a bandwidth conservation technology. This function allows several users to share the same packet sent from the IP camera. For using Multicast, appoint here an IP Address and port. TTL means the life time of packet, the larger the value is, the more users can receive the packet. **For using Multicast, be sure to enable the function Force Multicast RTP via RTSP in your media player. Then key in the RTSP path of your camera: rtsp ://(IP address)/ to receive the multicast.**

ONVIF

ONVIF		
ONVIF:	☒ v2.10/v1.02	☐ v1.01 ☐ Disabled
Security:	☐ Enabled	☒ Disabled
RTSP Keepalive:	☒ Enabled	☐ Disabled

Choose your ONVIF version and settings.

ONVIF

Under ONVIF connection, the video will be transmitted by RTSP. Be sure to enable the RTSP server in IP setting, otherwise the IP Camera will not be able to receive the video via ONVIF.

Security

By selecting **Disable**, the username and password are not required for accessing the camera via ONVIF. By selecting **Enable** the username and password are necessary.

RTSP Keepalive


When the function is enabled, the camera will check once in a while if the camera via ONVIF is still connected. If the connection has been broken, the camera will stop transmitting video to the user.

Bonjour

Bonjour	
Bonjour:	☐ Enabled ☒ Disabled
Bonjour Name:	IP_Camera @00:0F:0D:00:28:4D

This function allows Apple systems to connect to this IP camera. On **Bonjour Name** key-in the name here. The web browser **Safari** also has a Bonjour function. Tick **Include Bonjour** in the bookmark setting, for the IP camera to appear under the Bonjour category.


Click the icon to connect to the IP camera. The Bonjour function on Safari browser doesn't support HTTPS protocol. If on the camera you select **https**, the camera will appear on Safari's bookmarks but it cannot be accessed. Take as a reference the following image:

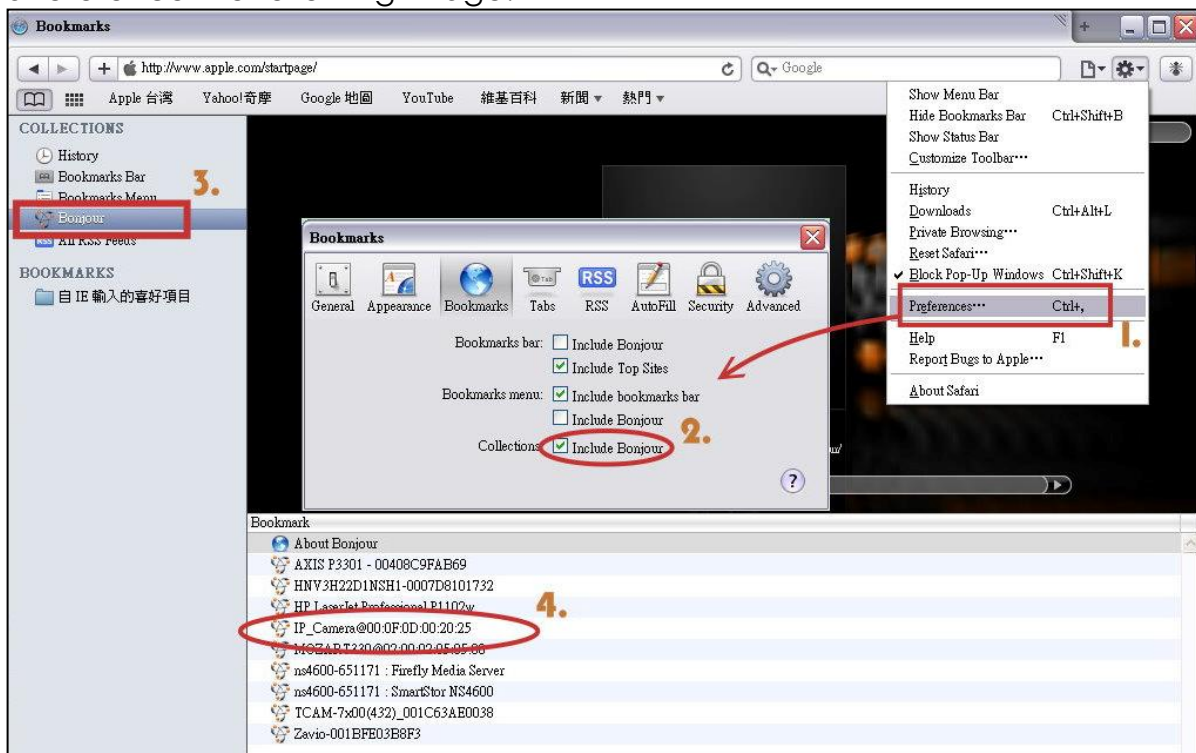

LLTD

LLTD (Link Layer Topology Discovery)	
LLTD:	☒ Enabled ☐ Disabled

If your PC supports LLTD, enable this function for allowing checking the connection status, properties, and device location (IP address) in the network map. If the computer is running Windows Vista or Windows 7, you can find LLTD through the path: Control Panel → Network and Internet → Network and Sharing Center → Click **See full map**.

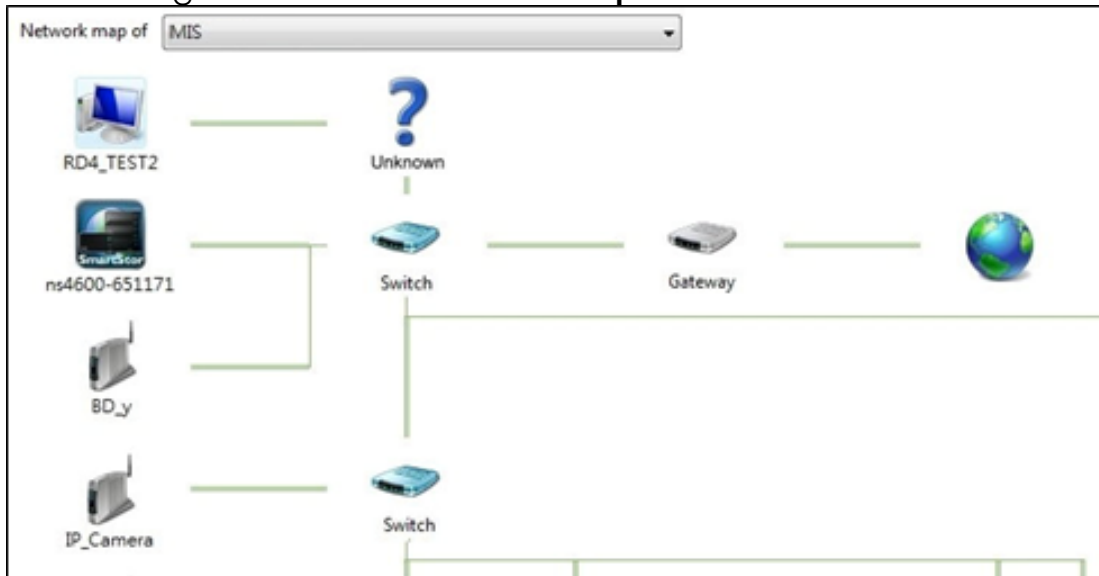

Advanced


HTTPS Setting

(Hypertext Transfer Protocol Secure)

When the users access cameras via Https protocol, the transmitted information will be encrypted, increasing the security level.

HTTPS Setting	
Created Request	
Subject:	C=TW , ST= , L= , O= , OU= , CN=
Date:	2020/Mar/11 17:46:44
Content Remove Download	
Installed Certificate	
Subject:	C=TW , ST= , L= , O= , OU= , CN=
Date:	Mar 14 08:45:42 2038 GMT
Content Remove Download	
Connection Types	
☐ Only TLS1.2	
HTTP v	

Connection Types

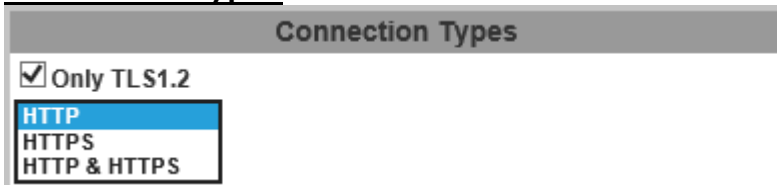

TLS is the abbreviation of **Transport Layer Security**. Many websites send data with connection established by this protocol to. Tick **Only support TLS1.2** checkbox with mouse to enable. Select the connection type:

HTTP

User can access the camera via HTTP path but cannot access it via HTTPS path.

HTTPS


User can access the camera via HTTPS path but cannot access it via the HTTP path.

HTTP & HTTPS

Both the Http and Https path can be used to access the camera. When you change the connection type settings, it may cause connection error or disconnection error if you switch the protocol directly. Therefore, **HTTP & HTTPS** mode is necessary.


If you want to change from Http to Https, please switch to **HTTP & HTTPS** mode first, and then switch to **HTTPS** mode and vice versa.

The Https protocol has a verifying mechanism. When the user access a website via Https, the browser will check the certificate of that domain and verify its trustiness and security. Certificate generation process:

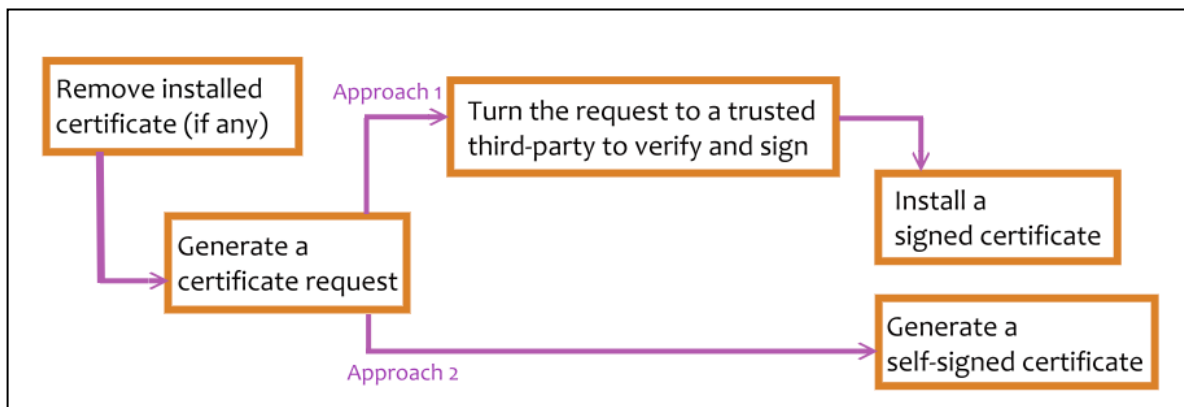

Remove Existing Certificate

Before you generate a new certificate, please remove the installed one. Select the **HTTP** connection type and click **Remove**. If a dialog box pops up to ask you to confirm, click **Yes**.

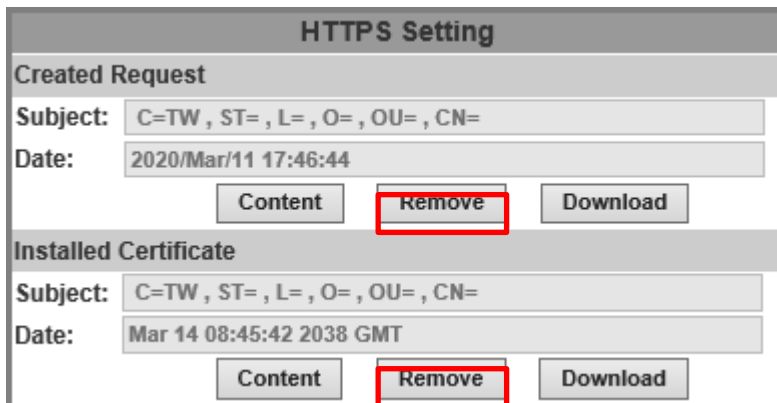

HTTPS Setting

Created Request

Subject: C=TW , ST= , L= , O= , OU= , CN=

Date: 2020/Mar/11 17:46:44

Content Remove Download

Installed Certificate


Subject: C=TW , ST= , L= , O= , OU= , CN=

Date: Mar 14 08:45:42 2038 GMT

Content Remove Download

Download Request

Click Download to save the CSR (Certificate Signing Request) file. Select **Save** from the pop-up window and assign the download directory path.




Do you want to open or save request_public_key.csr from 192.168.81.110?

Open Save Cancel x

Created Request

Fill-in the following form and click **apply**.

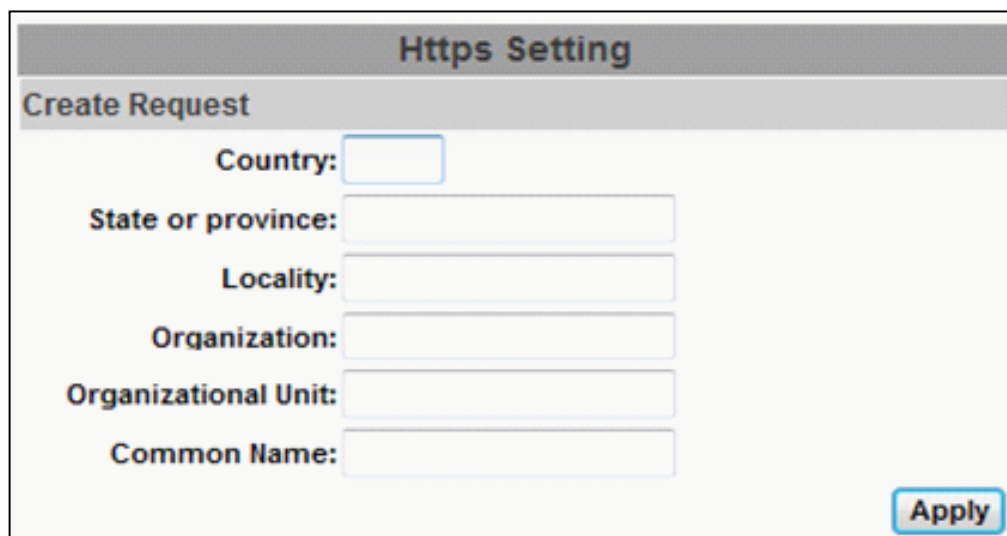

Https Setting

Create Request

Country:

State or province:

Locality:

Organization:

Organizational Unit:

Common Name:

Apply

Country: Country where the company is located

State or province: The state or province where the company is located


Locality: The name of the city where the company is located

Organization: Needs to be consistent with legally registered name

Organizational Unit: Company department, you can fill in its common name

Common Name: The name of the domain you want to secure

After generating a certificate request, if you choose to turn it & verify it by a trusted third-party, click **Content** and copy all the request content.

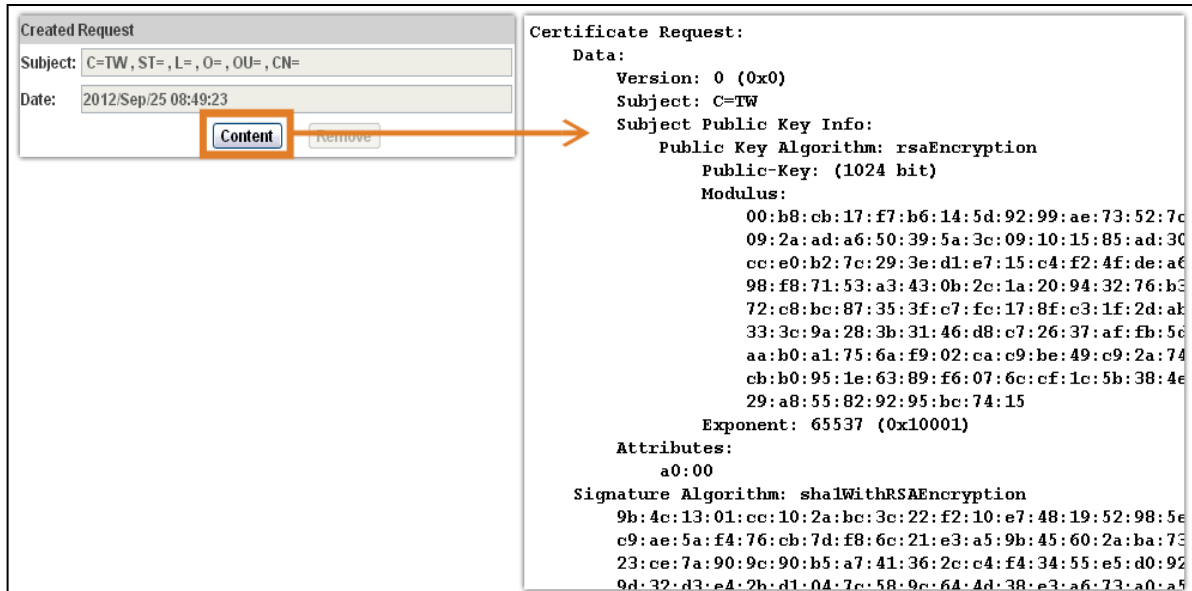


According to the certificate source, there are two ways to install the certificate: If you had sent the certificate request for signing and receiving a signed certificate, click **browse** and find the certificate file in your computer. Click **Apply** to install it.


If you choose to generate a self-signed certificate, fill-in the following forms and set the validity day, click **Apply** to finish installed it.



After finishing the installation, click on **Content** to call out and check the certificate content.

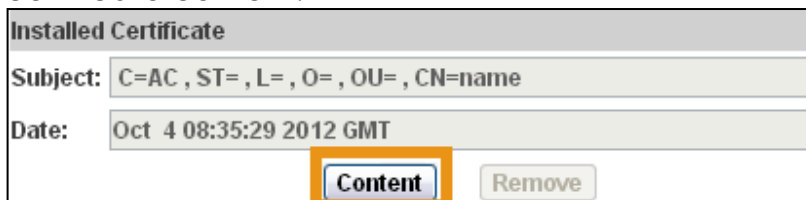

To use Https to access the camera, open your browser, and key-in **https:// (IP address)/** in the address bar. Now your data will be transmitted via encrypted communications. The browser will check your certificate status. It might show the following warning message:

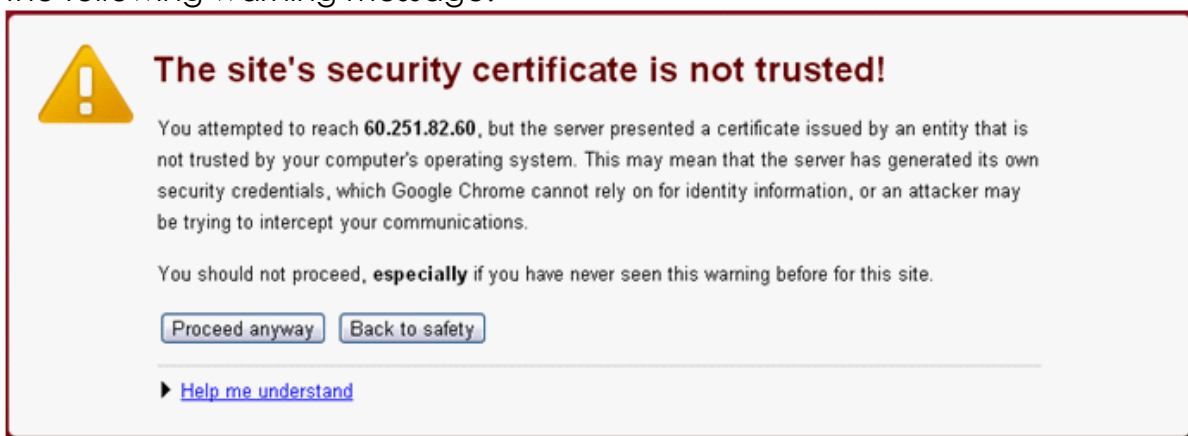

Meaning that certificate is self-signed or signed by a distrusted institution. Click **Proceed anyway** for continuing to the camera page.

SNMP (Simple Network Management Protocol)

SNMP	
SNMP Setting	
☐ SNMPv1	☒ SNMPv2c
Write Community:	write
Read Community:	public

SNMPv1 or SNMPv2: Write the name of both Write Community and Read Community.

SNMPv3: Set the Security Name, Authentication Type, Authentication Password, Encryption Type, Encryption Password of Write mode and Read mode.

☒ **SNMPv3**

Write Security Name:

Authentication Type: ☒ MD5 ☐ SHA

Authentication Password:

Encryption Type: ☒ DES ☐ AES

Encryption Password:

Read Security Name:

Authentication Type: ☒ MD5 ☐ SHA

Authentication Password:

Encryption Type: ☒ DES ☐ AES

Encryption Password:

Enable **SNMPv1/SNMPv2 Trap** for detecting the Trap server. Please set what event needs to be detected.

☒ **SNMPv1/v2c Trap**

Trap Address:

Trap Community:

Trap Event:

☒ Cold Start
 ☒ Setting Changed
 ☒ Network Disconnected
 ☒ V3 Authentication Failed
 ☒ 4G Signal strength
 ☒ SDCard Insert/Remove

- **Cold Start**: The camera starts up or reboots.
- **Settings Changed**: The SNMP settings have been changed.
- **Network Disconnected**: The network connection was broken down (The camera will send trap messages after the network is connected again).
- **V3 Authentication Failed**: A SNMPv3 user account tries to get authentication but failed. (Due to incorrect password or community)
- **4G Signal strength**: When the 4G signal is found to be too low, the camera will send a notification message.
- **SD Card Insert / Remove**: A Micro SD card is inserted or removed.

Access List

Enable IP address filter to allow/reject some IP address a network access. There are two options: **single** and **range**.

IP FILTER

IP Address Filter Setting

☒ **Enable ip address filter**

IPv4 Setting:

add

☐ allow
 ☒ deny

range ▼

address: 192.168.50.151

-

192.168.50.161

IPv4 List:

No.	IP Address	Filter	Action
1	192.168.50.159	Allow	remove
2	192.168.50.151 - 192.168.50.161	Deny	remove
3			remove
4			remove
5			remove
6			remove
7			remove
8			remove
9			remove
10			remove

☒ **Allow admin ip address always access this device**

Admin ip address:

Apply

Check the **Enable ip Address filter**, enter the IP address you want to deny access. Input the IP address you would like to deny entry, select "**deny**" and click the "**Add**" icon to add this IP address to the rejection list, the user with that IP address connecting to the camera will be blocked.

You can also choose to set a range of IP addresses to deny access, but allow several other IP address in the range to access the camera. The above picture is an example. Users with IP addresses between 192.168.50.151 ~ 161 will not be able to connect to this camera, only 192.168.50.159 is allowed to connect.

Note: When using this method, the order of the conditions of "Allow" in the list must be the input entry above the entry of "deny".

If we reverse the entry order to:

Deny: 192.168.50.151~192.168.50.161 being the first on the IPv4 list


Allow: 192.168.50.159 being the second on the IPv4 list

Due to the order being set, the user using **192.168.50.159** IP address will then be unable to connect to this camera. Other IP addresses will be allowed access if not enlisted in the access list.

QoS/DSCP

(Quality of Server/Differentiated Services Code-point)

DSCP specifies a simple mechanism for classifying and managing network traffic; and provide QoS on IP networks. DSCP is a 6-bit in the IP header for packet classification purpose. Please define it for **Live Stream, Event / Alarm and Management**.

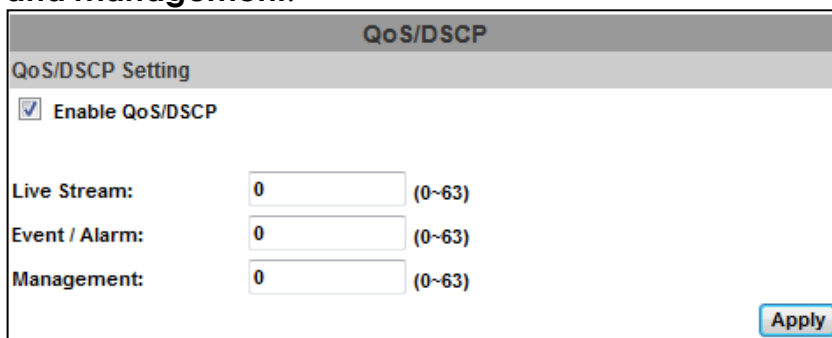

IEEE 802.1x

It is an IEEE standard for port-based Network Access Control. It provides an authentication mechanism to a device on LAN/WLAN.

The EAPOL protocol supports service identification and optional point to point encryption over the local LAN segment.



Please check what version supports the authenticator and authentication server. This camera supports EAP-TLS method. Enter the ID, password issued by the CA, then upload related certificates.

IEEE 802.1x/EAP-TLS	
IEEE 802.1x Setting	
☐ Enable IEEE 802.1x	
Eapol version:	☒ v1 ☐ v2
Identity:	
Private key password:	
Apply	
CA certificate:	Upload Browse...
Status:	Remove
Client certificate:	Upload Browse...
Status:	Remove
Client private key:	Upload Browse...
Status:	Remove

PPPoE & DDNS

PPPoE Setting

PPPoE Setting	
☐ Enabled ☒ Disabled	
Username:	
Password:	

Select **Enabled** to use PPPoE. Key-in the the Username and password for ADSL connection.

Send mail after PPPoE dialed

Send mail after PPPoE dialed
☐ Enabled
Subject:

When connected to the internet, the camera will send a mail to a specific mail account.

DDNS Setting

DDNS Setting
☐ Enabled ☒ Disabled
Provider:
Hostname:
Username:
Password:
Schedule Update: Minutes

camddns as an example: Enable this service→Input username→IP schedule update→Default: 5 minutes→Click **Apply**
Check results from the message presented inside the **State** field.

State

State

Idle

Note:

- Schedule Update:** Depends on the input time of Schedule Update, it will update DDNS's web site automatically. The time range is from 5 to 5000 minutes.
*0: It will not update.
- dyndns.org & 3322.org:** Update once per day is recommended (1440 minutes per day). If updated too frequently, it will be blocked.

Apply

(1) **Updating:** Information update

(2) **Idle:** Stop service

(3) **DDNS registration successful, can now log by**
<http://<username>.ddns.camddns.com>: Register successfully.


(4) **Update Failed, the name is already registered:** The user name has already been used. Please change it.

(5) **Update Failed; please check your internet connection:** Network connection failed.


(6) **Update Failed, please check the account information you provided:** The server, user name, and password may be wrong.

Server Settings

There are several server types available. Select the item to display detailed configuration options. You can configure either one or all of them.

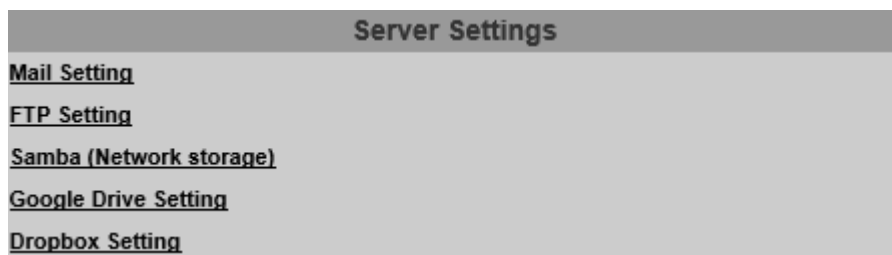


Click **Apply** to save settings at the bottom of **Server Settings**, then click **Test** icon to test the server connection. A message box will tell you **OK!** if it works, and a test document will be created in the location.

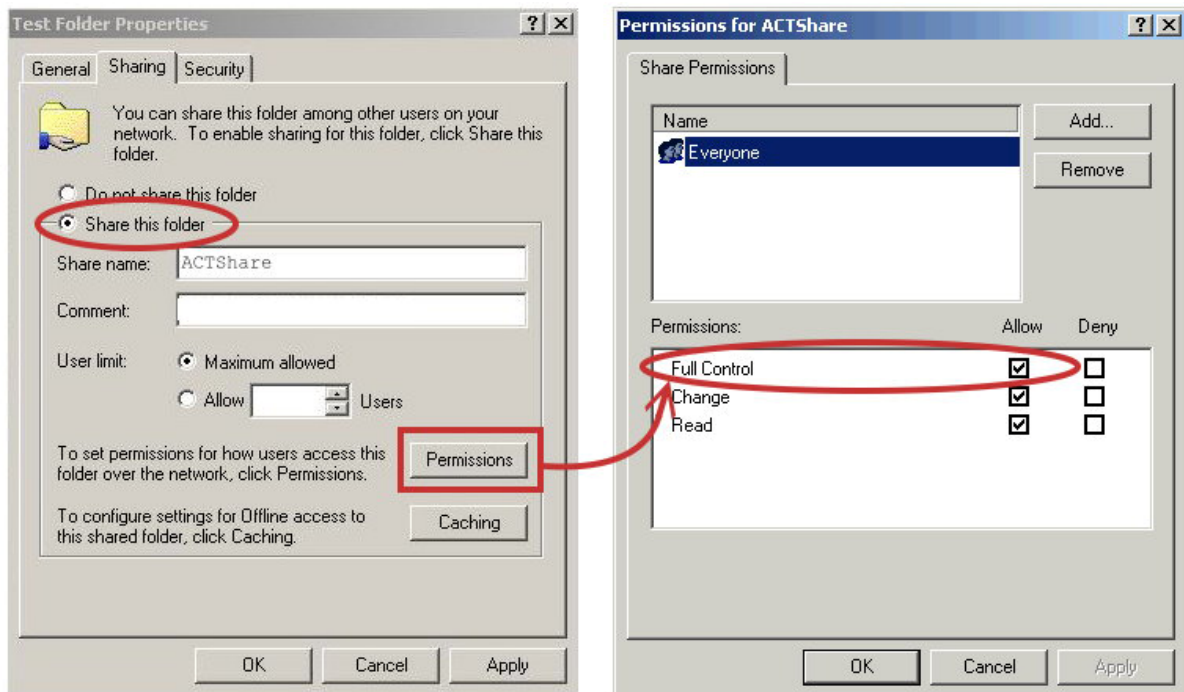

If the testing fails, check the sharing setting of your location folder. The folder properties must be **shared** and the permissions must be **Full Control**.

Mail Setting

To send out the video via mail of FTP, set up the configuration first.

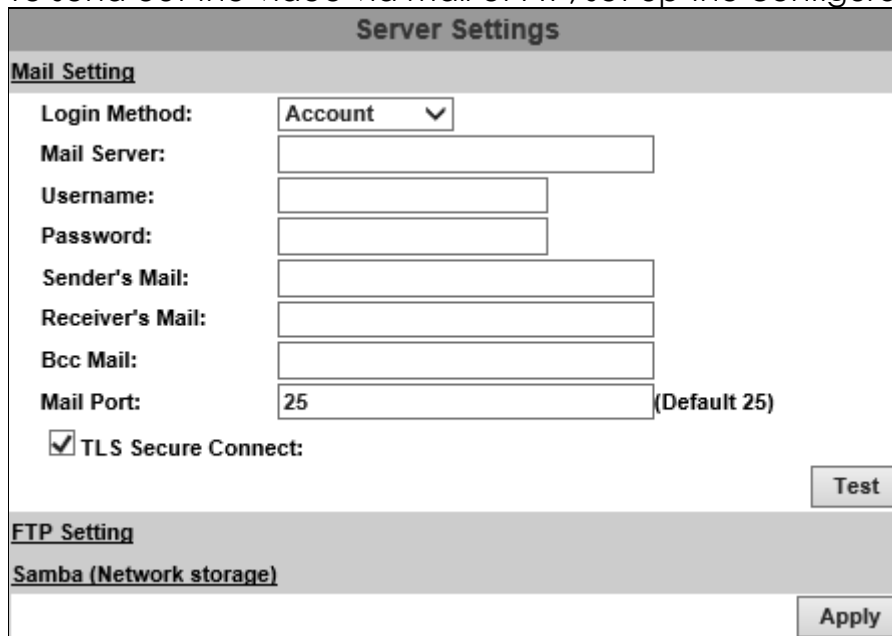


The screenshot shows the 'Mail Setting' section of a 'Server Settings' window. It includes fields for Login Method (set to 'Account'), Mail Server, Username, Password, Sender's Mail, Receiver's Mail, Bcc Mail, and Mail Port (set to 25, with '(Default 25)' text). There is a checked checkbox for 'TLS Secure Connect' and a 'Test' button.

Click **Apply** to confirm settings at the bottom of **Server Settings**, then click **Test** icon to test the server connection.

FTP Setting

To send out the video via mail of FTP, please set up the configuration.

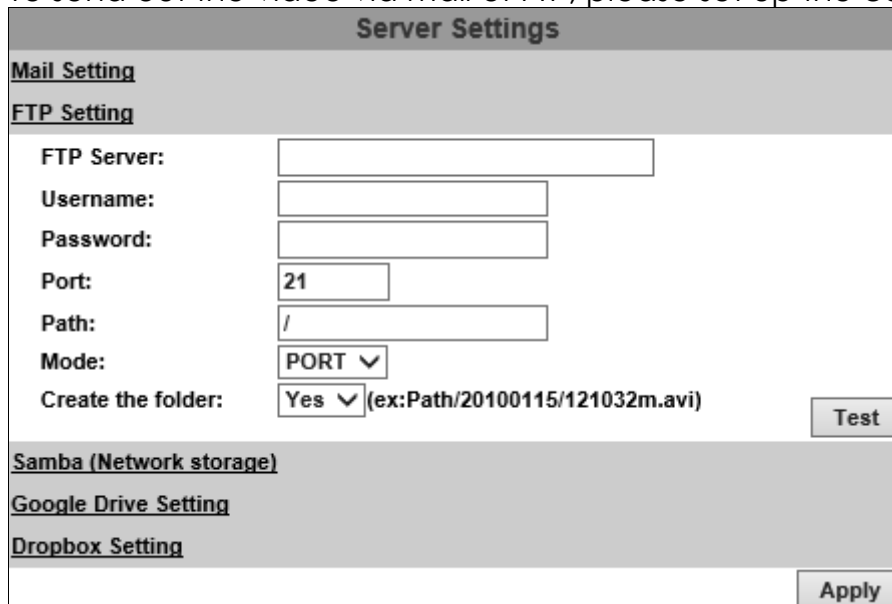


The screenshot shows the 'FTP Setting' section of a 'Server Settings' window. It includes fields for FTP Server, Username, Password, Port (set to 21), Path (set to '/'), Mode (set to 'PORT'), and Create the folder (set to 'Yes' with an example path '(ex:Path/20100115/121032m.avi)'). There is a 'Test' button.

Click **Apply** to confirm settings at the bottom of **Server Settings**, then click **Test** icon to test the server connection.

Samba (Network Storage)

Select this option to send the media files via a neighbor network when an event is triggered.

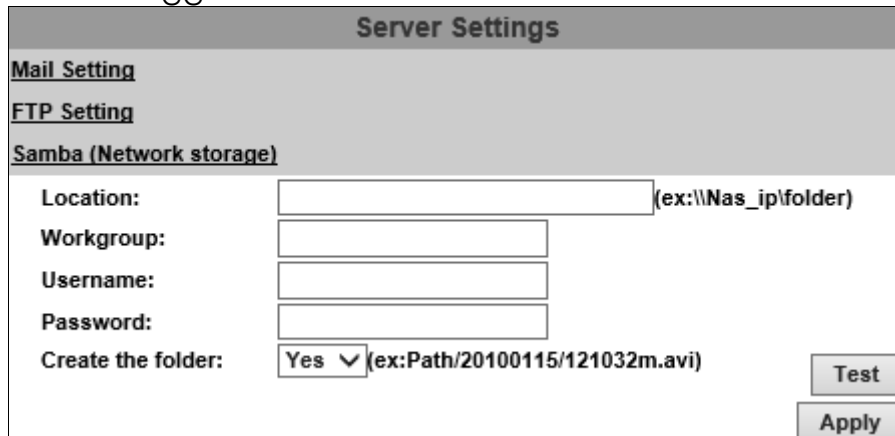


The screenshot shows the 'Server Settings' window with the 'Samba (Network storage)' tab selected. The 'Location' field contains '(ex:\\Nas_ip\\folder)'. The 'Workgroup', 'Username', and 'Password' fields are empty. The 'Create the folder' dropdown is set to 'Yes' with a sample path '(ex:Path/20100115/121032m.avi)' shown. 'Test' and 'Apply' buttons are at the bottom right.

Click **Apply** to confirm settings at the bottom of **Server Settings**, then click **Test** icon to test the server connection.

Google Drive Setting


Select this option to send the media files unto the cloud server Google Drive whenever an event is triggered.

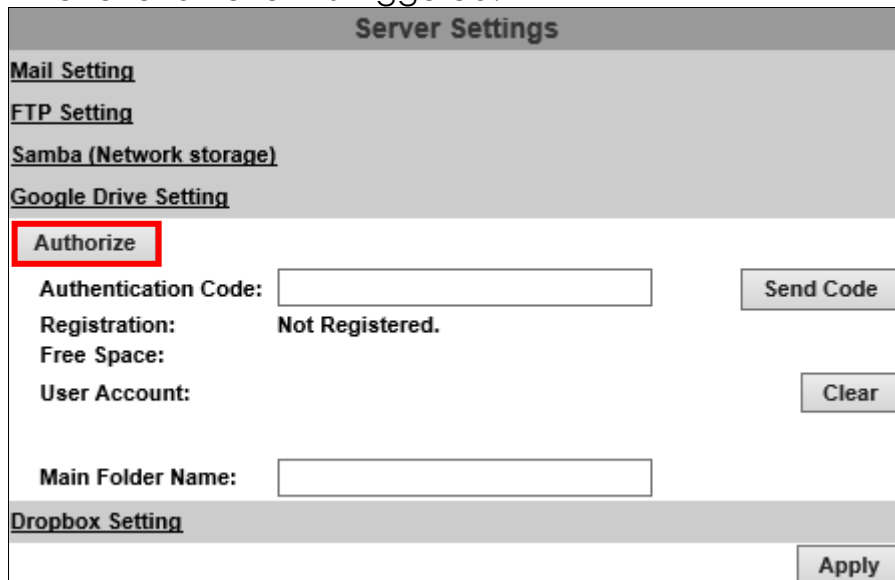

The screenshot shows the 'Server Settings' window with the 'Google Drive Setting' tab selected. The 'Authorize' button is highlighted with a red box. Below it, the 'Authentication Code' field is empty, and the 'Send Code' button is visible. The 'Registration' status is 'Not Registered.'. The 'Free Space' and 'User Account' fields are empty, with a 'Clear' button to the right. The 'Main Folder Name' field is empty. The 'Dropbox Setting' tab is visible below, with an 'Apply' button at the bottom right.

You will have to sign in to the [Google Drive](#) network before you start the operation. If you have not yet been a Google user, the [online registration](#) will be required, and you will need to [sign in](#) first as a Google account user. Below are the steps:

- i. Click **Authorize** to begin the online-registration operation. A window will pop up and require you to sign in for a Surveillance Client account directed by Google Drive server.

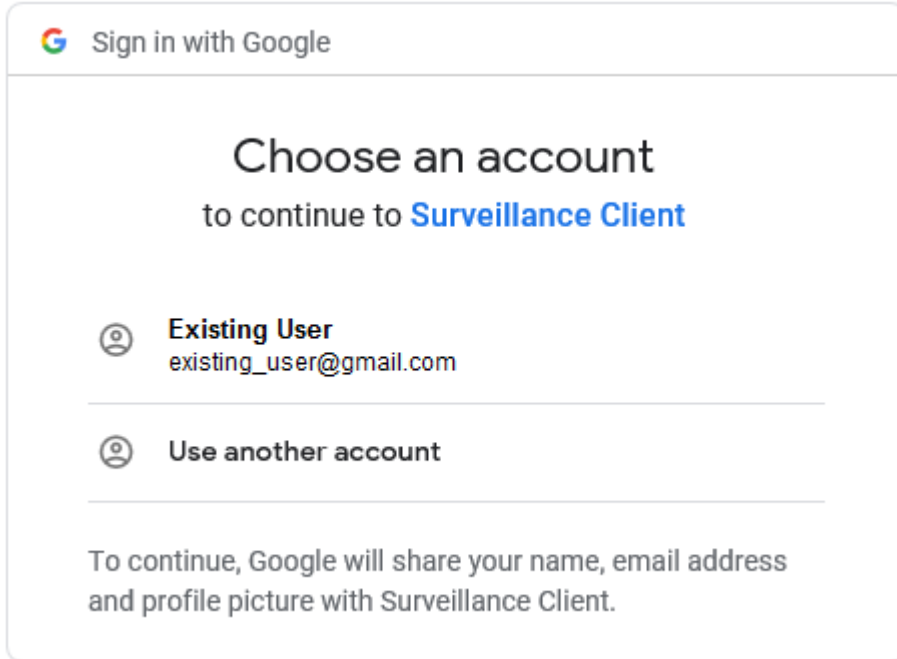

Sign in with Google


Choose an account
to continue to **Surveillance Client**

 **Existing User**
existing_user@gmail.com

 **Use another account**

To continue, Google will share your name, email address and profile picture with Surveillance Client.

- ii. Choose **Existing User** to continue the operation if you have already owned a Google Drive account. Otherwise, you may choose **Use another account** and sign in as another Google account user.

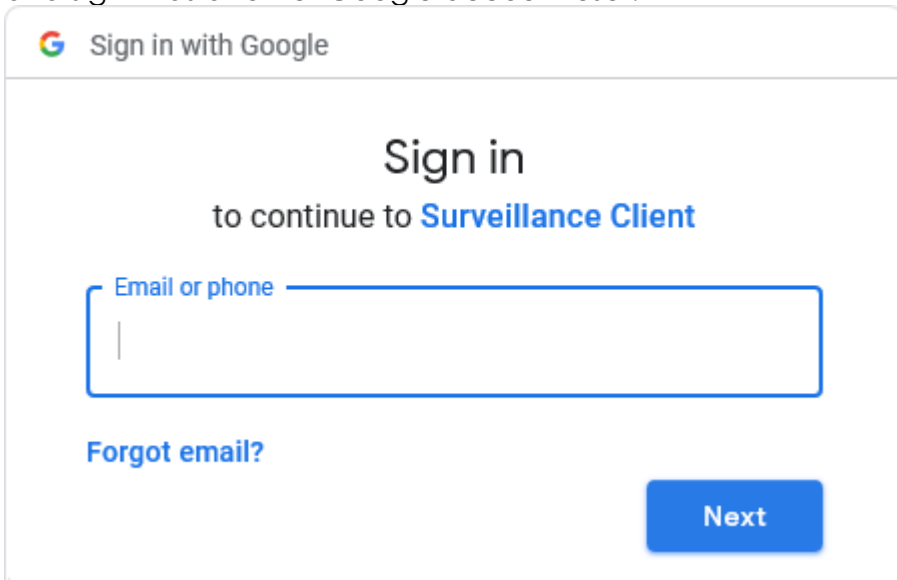

Sign in with Google


Sign in
to continue to **Surveillance Client**

Email or phone

[Forgot email?](#)

Next

- iii. Enter the password and click **Next**.

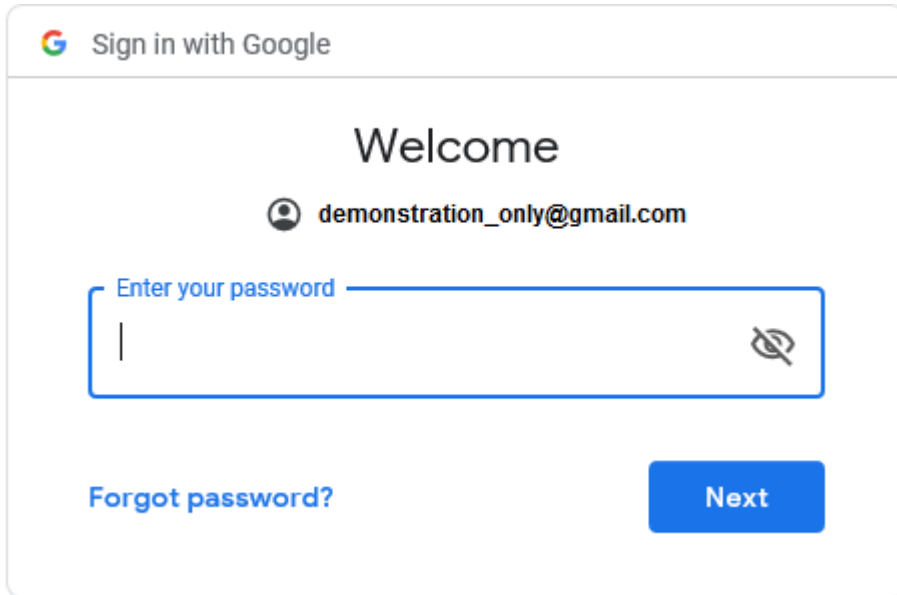

Sign in with Google


Welcome

 demonstration_only@gmail.com

Enter your password

[Forgot password?](#) [Next](#)

- iv. Click **Allow**.

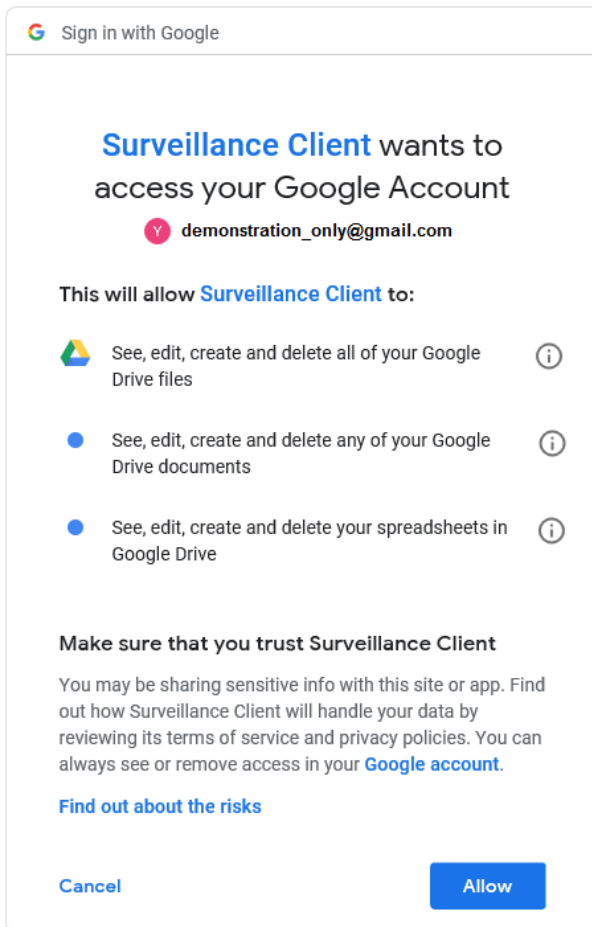

Sign in with Google

Surveillance Client wants to access your Google Account

 demonstration_only@gmail.com

This will allow **Surveillance Client** to:

-  See, edit, create and delete all of your Google Drive files 
-  See, edit, create and delete any of your Google Drive documents 
-  See, edit, create and delete your spreadsheets in Google Drive 


Make sure that you trust Surveillance Client

You may be sharing sensitive info with this site or app. Find out how Surveillance Client will handle your data by reviewing its terms of service and privacy policies. You can always see or remove access in your [Google account](#).


[Find out about the risks](#)

[Cancel](#) [Allow](#)


- v. **Authentication Code** will be generated by Google server.

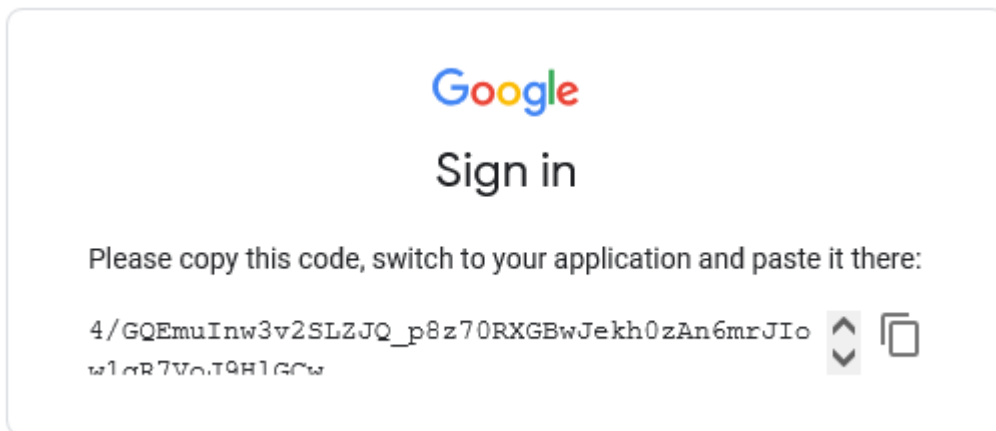


- vi. Paste the **Authentication Code** acquired from Google server in the required field, input the **Main Folder Name** of your preference and click **Send Code**.

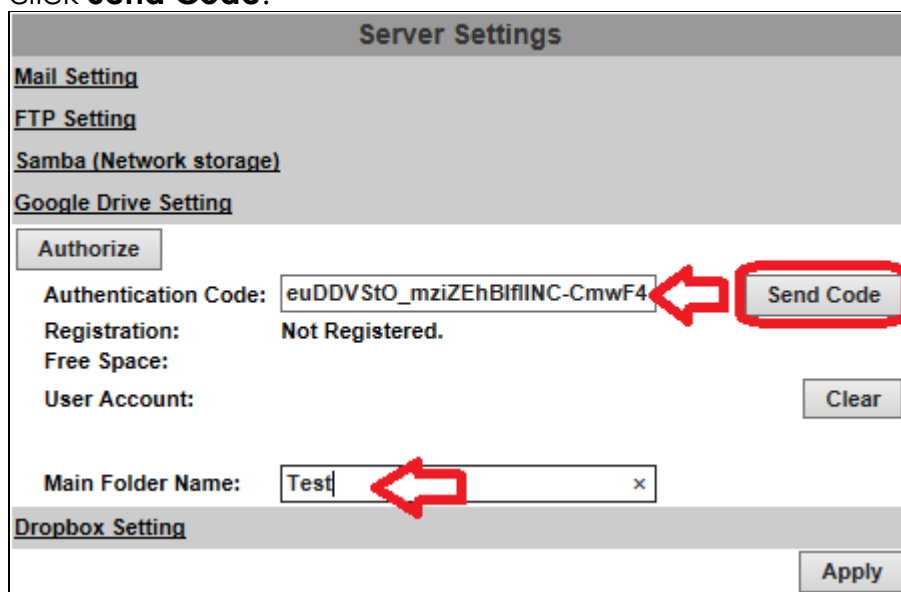

- vii. Please wait for around 15 seconds before clicking OK.



- viii. If the application is successful, you will be able to see a list of status displayed, as circled in red in the demonstration image.

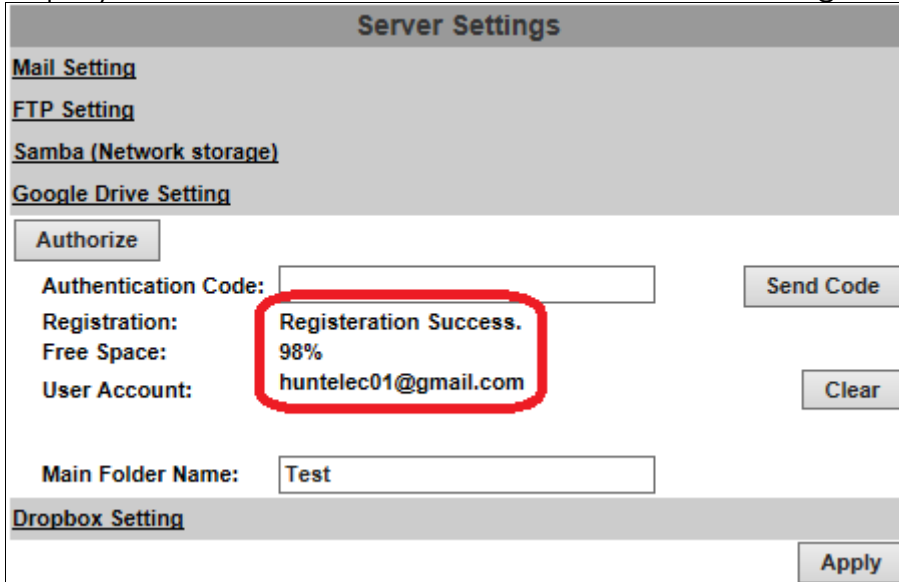


The screenshot shows the 'Server Settings' window with several tabs: 'Mail Setting', 'FTP Setting', 'Samba (Network storage)', and 'Google Drive Setting'. The 'Google Drive Setting' tab is active. It contains an 'Authorize' button, an 'Authentication Code' input field, a 'Send Code' button, and a 'Clear' button. Below these, the registration status is displayed: 'Registration: 98%' and 'User Account: huntelec01@gmail.com'. This status information is circled in red. At the bottom, there is a 'Main Folder Name' input field with the value 'Test' and an 'Apply' button.

Click **Apply** to confirm settings at the bottom of **Server Settings**. Click **Clear** to delete the current account registered for this server.

Dropbox Setting

Select this option to send the media files unto the cloud server Dropbox whenever an event is triggered.

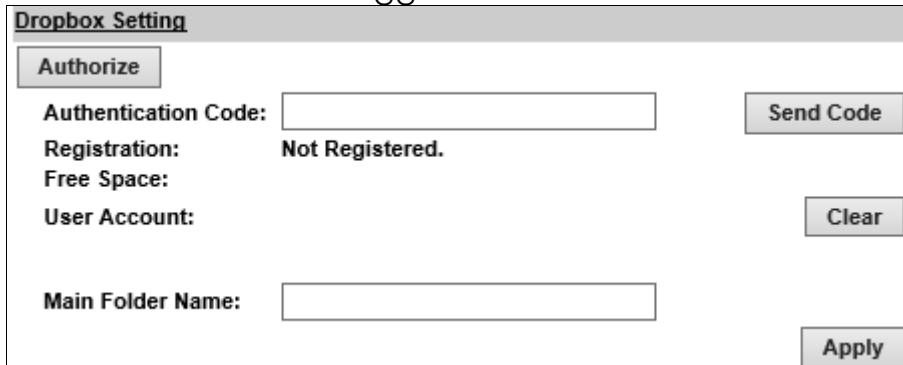

The screenshot shows the 'Dropbox Setting' window. It has an 'Authorize' button, an 'Authentication Code' input field, a 'Send Code' button, and a 'Clear' button. The registration status is displayed as 'Registration: Not Registered.' Below this, there is a 'Main Folder Name' input field and an 'Apply' button at the bottom right.

You will have to sign in to [Dropbox](#) network first. If you do not own an account, you will need to register one for free. If you have already created a Dropbox account, click **Authorize** to start the operation.

A window from the Dropbox server will open to ask you for signing-in.

Enter **Authentication Code** in the required field and click **Send Code**.

Click **Clear** to delete the current account registered for this server.

Click **Apply** to confirm settings at the bottom of **Server Settings**.

Please refer to [Google Drive Setting](#) for the same setup procedure.

A/V Settings



Click  to get into the administration page. Click the [live video](#) page.



to go back to the [live video](#) page.



System Information

Server Information

MAC Address: 00:0F:0D:28:92:B0

Server Name: IP_Camera ☐ Status Bar

Language: ☒ English ☐ 繁體中文 ☐ 简体中文 ☐ French
☐ Russian ☐ Italian ☐ Spanish ☐ German
☐ Portuguese ☐ Polish ☐ Japanese

OSD Setting

Time Stamp: ☐ Enabled ☒ Disabled

Text: ☐ Enabled ☒ Disabled

OSD_Display [Text Edit](#)

Time Setting

Server Time: 2018/1/12 0:26:04 Time Zone: GMT+08:00

Date Format: ☒ yy/mm/dd ☐ mm/dd/yy ☐ dd/mm/yy

Time Zone: GMT+08:00

☐ Enable Daylight Saving:

☐ NTP:

NTP Server: pool.ntp.org

Update: 6 Hour

Time Shift: 0 Minutes [-1440..1440]

☐ Synchronize with PC's time

Date: 2018/4/11

Time: 15:46:54

☐ Manual


Date: 2018/4/11

Time: 15:46:51

☒ The date and time remain the same

[Apply](#)

Image Setting

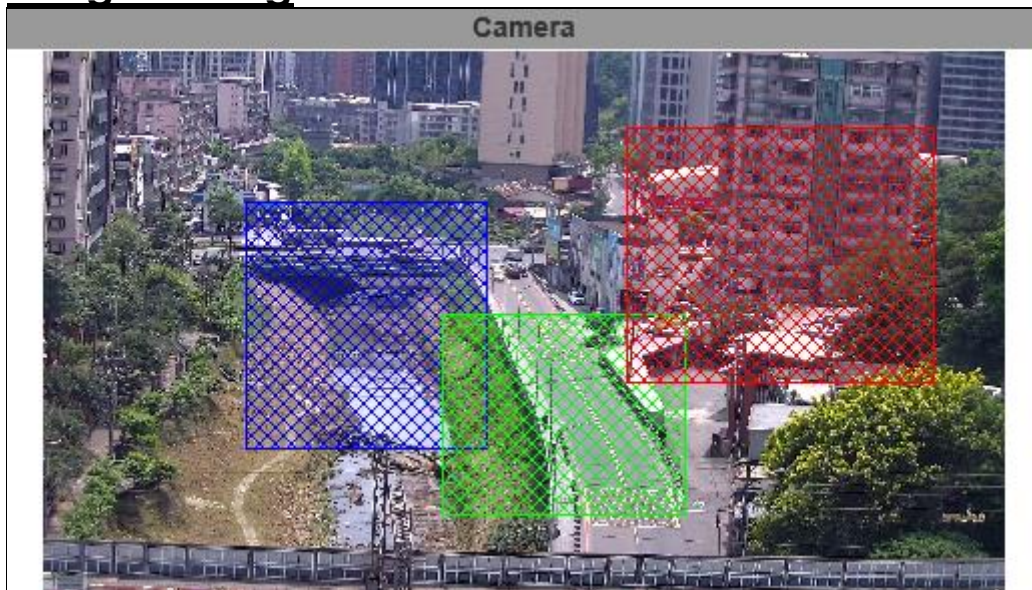


Camera offers preview of the result made in [Image Setting](#).

Privacy Mask

An area on the monitoring screen can be masked as a block of particular color only in [live view](#) for security and privacy purposes, but will not be visible in the video recorded. You can create up to 3 privacy masks.



Click any **Area 1/2/3** button first, and then draw an area on the preview image screen with mouse. Click **Save** to apply settings and create the mask.

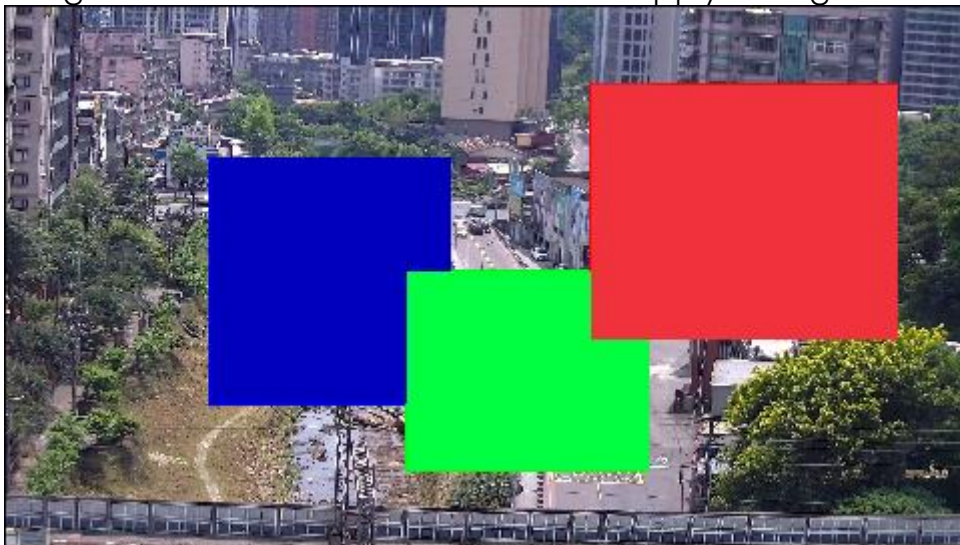

Discard the masked area previously set by clicking **Area 1/2/3** button again, and click **Save** to confirm.

Image Setting


Day Profile & Night Profile

Settings can be adjusted under **Day Profile** & **Night Profile** drop-down lists. Such as **Brightness**, **Contrast**, **Hue**, and **Sharpness**...etc.

Day Profile	Night Profile
0 ▾	0 ▾
0 ▾	0 ▾
0 ▾	0 ▾
0 ▾	0 ▾
1 (Low) ▾	1 (Low) ▾
2 ▾	2 ▾
1 ▾	1 ▾
64x ▾	64x ▾
Outdoor ▾	Outdoor ▾

Activate them by enabling **Times Mode** from **Day & Night** and assign settings under each profile. Configurations from both Day & Night Profiles will be adjusted between daytime and night time. Different **Brightness**, **Contrast**, **Hue**, and **Sharpness** values can be adjusted here.

D-WDR & True-WDR

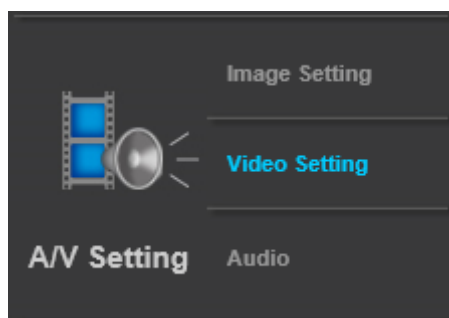

Click Video Setting from **A/V Settings** menu first.

There are two types of **Image Settings** to switch from depending on what **Input Resolution** from **Video Setting** you have applied to the camera.

Video Setting	
Input Resolution:	1920x1080 @ 30fps 1920x1080_WDR @ 30fps
Video System:	NTSC ▾
TV Output:	Auto ▾ (Auto : Based on the Video System)
Corridor Mode:	none ▾

Click **Apply** to assign an input resolution for captured video files. Features vary in FPS (frames-per-second) and options will be modified in **Image Setting**.

Input Resolution without WDR feature=**D-WDR**

It enables the camera to reduce the contrast in the view to avoid dark zones as a result of over & under exposure.

Video Setting	
Input Resolution:	1920x1080 @ 30fps ▼

Image Setting	Day Profile	Night Profile
Brightness:	0 ▼	0 ▼
Contrast:	0 ▼	0 ▼
Hue:	0 ▼	0 ▼
Sharpness:	0 ▼	0 ▼
D-WDR:	1 (Low) ▼	Off ▼
Denoise 3D:	5 ▼	3 ▼
Denoise 2D:	3 ▼	2 ▼
Shutter Time:	Outdoor ▼	Outdoor ▼
Sense-Up:	1/15 ▼	
AE Compensation:	0 ▼	0 ▼
AE Strategymode:	Lowlight priority ▼	

Input Resolution with WDR feature=**True WDR**

It enables the camera to combine the over & under exposures to smooth out dark zones for best image quality.

Video Setting	
Input Resolution:	1920x1080_WDR @ 30fps ▼

Image Setting	Day Profile	Night Profile
Brightness:	0 ▼	0 ▼
Contrast:	0 ▼	0 ▼
Hue:	0 ▼	0 ▼
Sharpness:	0 ▼	0 ▼
True WDR:	4 ▼	Off ▼
Denoise 3D:	5 ▼	3 ▼
Denoise 2D:	3 ▼	2 ▼
Shutter Time:	Outdoor ▼	Outdoor ▼
Sense-Up:	1/15 ▼	
AE Compensation:	0 ▼	0 ▼
AE Strategymode:	Lowlight priority ▼	

Go back to Image Setting where you can operate a different set of settings.

Denoise 3D & 2D

Filter the noise and blur from the image and show a clearer view. You can set the values for **3D & 2D** filters.

Shutter Time

Choose the location of your camera or a fixed shutter time. The shorter the shutter time is the less light the camera receives and the image becomes darker. **Note:** When you select a number in **Shutter Time**, the shutter time will vary in a range and be controlled by camera automatically.

Sense-Up

This function increases the sensitivity of camera to get brighter image at night. The smaller value you select, the slower shutter speed becomes. So that the image will get brighter, and moving subjects might be blurred.

AE Compensation

Assign levels of exposure to help lighten or darken the camera view. Assigning a bigger/smaller number creates a lighter/darker image.

AE Strategymode

Select **Lowlight Priority** or **Highlight Priority** to adjust the view in preference of lightening or darkening the contrast.

Saturation:	0	▼
AGC:	64x	▼
Low Lux Auto-adjust:	☒	
Anti Fog:	☐	Enable
Lens Distortion Correction:	Off	▼
Video Orientation:	☐ Flip	☐ Mirror

Saturation

Adjust the saturation values here.

AGC

The sensitivity of the camera can be adjusted according to its environmental lighting. Enable this function to get brighter images on low light, but the level of noise may also increase.

Low Lux Auto-adjust

Click to enable the camera to adjust its low lux level automatically in different lighting environments.

Anti Fog

Improve the image clarity on environments presenting high levels of fog or smoke.

Lens Distortion Correction

Straighten the curves in the borders of the image caused by the lens angles.

Video Orientation

Flip or mirror the image.

Day & Night

Day & Night:	Light Sensor Mode Color Mode(Day) B/W Mode(Night) Times Mode Synchronize with DI input
--------------	---

Adjust the camera to detect the light level for different environments. Settings vary when modes are shifted. An extra sub-function may appear to be available after a setting is adjusted.

Light Sensor Mode

Day & Night:	Light Sensor Mode ▼	
Night to Day Interval:	6 ▼ (second)	Day to Night Interval: 6 ▼ (second)
Night to Day Lux:	7 lux ▼ (about)	Day to Night Lux: 3 lux ▼ (about)
Current Lux:	over 55 lux (about)	
IR Intensity:	Far ▼	
White Balance:	Auto ▼	
Red Gain:	0 ▼	Blue Gain: 0 ▼
Outdoor Threshold:	0 ▼	Indoor
Default		

The image will turn black & white at night to keep a clear image. To set light sensor mode, appoint a lux standard of switching day & night. Current lux values in the menu are provided for reference.

Color Mode (Day)

Day & Night:	Color Mode(Day) ▼	
White Balance:	Auto ▼	
Red Gain:	0 ▼	Blue Gain: 0 ▼
Outdoor Threshold:	0 ▼	Indoor
Default		

Recommended to use during day time.

B/W Mode (Night)

Day & Night:	B/W Mode(Night) ▼	
IR Intensity:	Far ▼	
White Balance:	Auto ▼	
Red Gain:	0 ▼	Blue Gain: 0 ▼
Outdoor Threshold:	0 ▼	Indoor
		Default

Recommended to use during night time.

Times Mode

Set the values in Brightness, Contrast, Sharpness, and [Denoise\(3D&2D\)](#) for both [Day & Night Profile](#) to be performed according to the **Time** arranged from Day & Night.

Day & Night:	Times Mode ▼	
Time: Day:	05:00	Night: 17:00 (HH:MM) Save Times
IR Intensity:	Far ▼	
White Balance:	Auto ▼	
Red Gain:	0 ▼	Blue Gain: 0 ▼
Outdoor Threshold:	0 ▼	Indoor
		Default

Time: The user can define when the daytime (Day) starts by filling in the digits such as 05:00 or 12:35. (Hours range: 0~23, minutes range: 0~59)

Example: Time: Day: 05:00 Night: 17:00 (HH:MM) If the time range is inaccurate, a window will pop up to remind you. Same way applies to filling the nighttime (Night).

Click **Save Times** when settings are completed.

Synchronize with DI input

Day & Night:	Synchronize with DI input ▼	
IR Intensity:	Far ▼	
White Balance:	Auto ▼	
Red Gain:	0 ▼	Blue Gain: 0 ▼
Outdoor Threshold:	0 ▼	Indoor
		Default

The settings are adjusted according to the DI input functions.

Night to Day Interval & Day to Night Interval

Set up the duration of how long before the Day time shifts to Night time (or the other way around).

Day to Night Lux & Night to Day Lux

Appoint desired lux values as a standard for switching **Night to Day Interval** & **Day to Night Interval**.

Current Lux

Provided as a reference value to adjust **Day to Night Lux** & **Night to Day Lux**.

IR Intensity

Adjust the IR intensity level from **Far**, **Middle** or **Near**.

White Balance

Assign lighting options which are designed for specific lighting environments.

AUTO - Continuously adjusts camera color balance according to any change of color temperatures and lightings in various environments.

Tungsten Lamp	Fluorescent Lamp	Sunlight
Cloudy		Cloudy Days

You can set the **Red/Blue gain** and **Outdoor Threshold** levels by selecting values from each drop down menu.

Red & Blue Gain

Adjust levels in red & blue contrasts in the image. Be aware that when these levels are increased, the image quality will become sharper to a point that noise of the image will also be increased.


Outdoor Threshold

Values applied for this feature will define how sensitive the motion detection is triggered for outdoor scenes.

Indoor

Click to enable operation for any indoor motion detections.

Default

Click on  button to restore the default settings.

Video Setting

Video System

Input Resolution

Click  to assign input resolution for captured video files. Features vary in FPS (frames-per-second) and will modify the options from [Image Setting](#).

Input Resolution without WDR features:

Video Setting	
Input Resolution:	1920x1080 @ 30fps ▼
Video System:	PAL ▼
TV Output:	Auto ▼ (Auto : Based on the Video System)
Corridor Mode:	none ▼

Input Resolution with WDR features:

Video Setting	
Input Resolution:	1920x1080_2WDR @ 30fps ▼
Video System:	NTSC ▼
TV Output:	Auto ▼ (Auto : Based on the Video System)
Corridor Mode:	none ▼

Video System

Choose from **NTSC** or **PAL** for video signal.

TV Output

Choose Auto or select between **NTSC** and **PAL** signal.


Corridor Mode


Set the degree of the camera angle for monitoring purpose.

The relation of the image and the camera would be as the following:

If Corridor Mode is set as **90 degrees** or **270 degrees** the relation of the image and the camera would be as the following:


Corridor Mode: 90 or 270 degrees

Degrees	Position	Image
0 degrees		

90 degrees		
270 degrees		

Corridor mode: None

Degrees	Position	Image
0 degrees		
90 degrees		

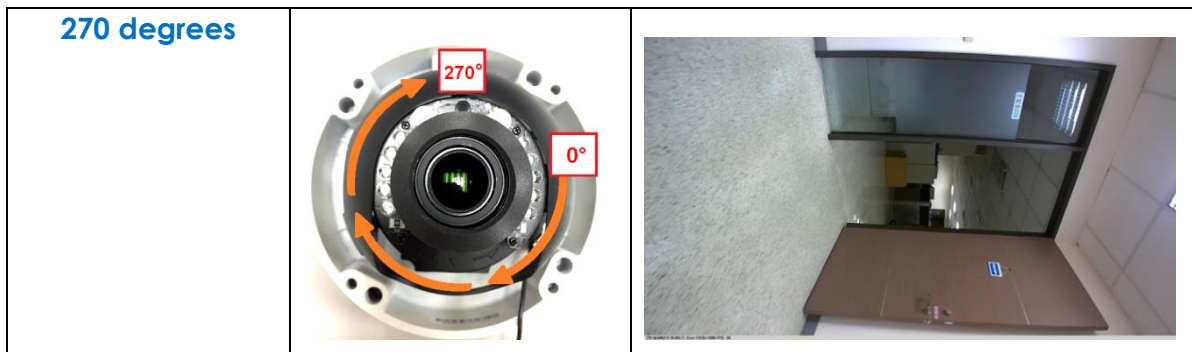

Streaming Setting: Basic Mode

Resolution range varies depending on different modes.

Streaming 1 Setting

☒ Basic Mode ☐ Advanced Mode

Resolution: 1920x1080 ▼

Profile: Main ▼

Quality: Best ▼

Video Frame Rate: 25 FPS ▼

Video Format: H.264 ▼

Stream Feature: ☒ ROI ☐ Smart Stream ☐ Close

ROI (Region Of Interest): [Preview](#)

ROI Satatus: Not Setting

RTSP Path: ex:rtsp://IP_Address/ Audio:G.711

Resolution

Choose a set for the camera resolution from **1920x1080@30fps**, **1280x720@30fps**, **640x480@30fps**, **320x240@30fps**

Profile

Chose from **Main** or **Baseline** based on bandwidth consumption of the recorded video to be replayed for different applications.

Quality

Levels vary from **Best**, **High**, **Standard**, **Medium** to **Low**. The higher the quality, the bigger the file size. Not ideal for internet transmission.

Video Frame Rate

Adjust the video refreshing rate for each second.

Video Format

The video refreshing rate per second. Select from H.264+, H.264 or JPEG


Stream Feature

Select from the options for operating different features.

Note: You MUST click [Apply](#) at the bottom after selecting the feature to enable either ROI or Smart Stream.

Stream Feature:	☒ ROI ☐ Smart Stream ☐ Close
ROI (Region Of Interest):	Preview
ROI Satatus:	Not Setting

ROI (Region of Interest)

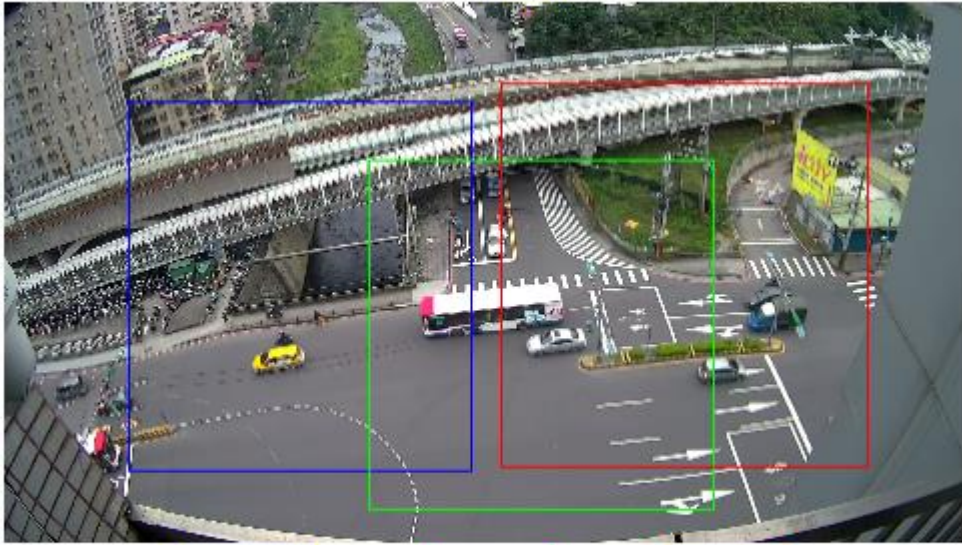ROI (Region Of Interest):	☒ ON ☐ OFF Preview
	
Area Setting:	Area 1 Area 2 Area 3 Save
ROI Area Quality:	5 ▼ 5 ▼ 5 ▼
FPS of None ROI:	25 FPS ▼ (ROI FPS equals to Video Frame Rate)

This function helps refine any specific part of the monitoring area which can be dragged out with the mouse at a time, improving efficiency in image observation and management in video compression rate.

Click [Preview](#) to enable ROI the function. Click on any of the colors in **Area Setting** to draw an ROI area on the preview screen by dragging your mouse. You can set up to approximately 3 ROI areas.

Adjust the **ROI Area Quality** and **FPS of None ROI** values of each area from each drop down list. You can see the **ROI Status** once **ROI** is activated.

Stream Feature:	☒ ROI ☐ Smart Stream ☐ Close
ROI (Region Of Interest):	Preview
ROI Satatus:	Area1_ON,Area2_ON,Area3_ON,FPS of None ROI=5,ROI Area Quality=Best

Smart Stream

Stream Feature:	☐ ROI ☒ Smart Stream ☐ Close
Smart Stream FPS:	3 FPS ▼
Smart Stream Bitrate:	512Kbps ▼

Enable this mode, set the range of FPS and Bitrate to limit its stream capacity, in order to preserve a better performance of image quality and save more bandwidth. You may also adjust its [Smart Stream Sensitivity](#) & [Smart Stream Interval](#) from [Video Setting](#)

RTSP Path

Offers the RTSP output connecting path.

Streaming Setting: Advanced Mode

Resolution range varies depending on different modes.

Streaming 1 Setting	
☐ Basic Mode	☒ Advanced Mode
Resolution:	1920x1080 ▼
Profile:	Main ▼
Bitrate Control Mode:	☐ CBR ☒ CVBR
Video Quantitative:	9 ▼
Video Bitrate Limit:	7Mbps ▼
Video Frame Rate:	25 FPS ▼
GOP Size:	1 X FPS ▼ GOP = 25
Video Format:	H.264 ▼
Stream Feature:	☒ ROI ☐ Smart Stream ☐ Close
ROI (Region Of Interest):	Preview
ROI Satatus:	Not Setting
RTSP Path:	ex:rtsp://IP_Address/ Audio:G.711

Resolution

Profile

Bitrate Control Mode

There are **CBR**(Constant Bit Rate) & **CVBR**(Constrained Variable Bit Rate) modes.

Video Bitrate Limit: (32Kbps~8Mbps)

The higher the **CBR** is, the better the video quality is.

Video Quantitative: 1(Low) ~10(High)

The higher the compression rate, the lower the picture quality is; vice versa. Avoid image breaking up or lagging by setting the bandwidth limit for **CVBR** streaming.

Video Frame Rate

GOP Size

It means "Group of Pictures". The higher the GOP is, the better the quality is.

Video Format

Stream Feature


ROI (Region of Interest)

Smart Stream

RTSP Path

Snapshot Setting

Select the image quality from 1 (Low) ~10(High).




Snapshot Setting

Quality: ▼

3GPP Streaming Setting

TV output will be shut down during this mode.

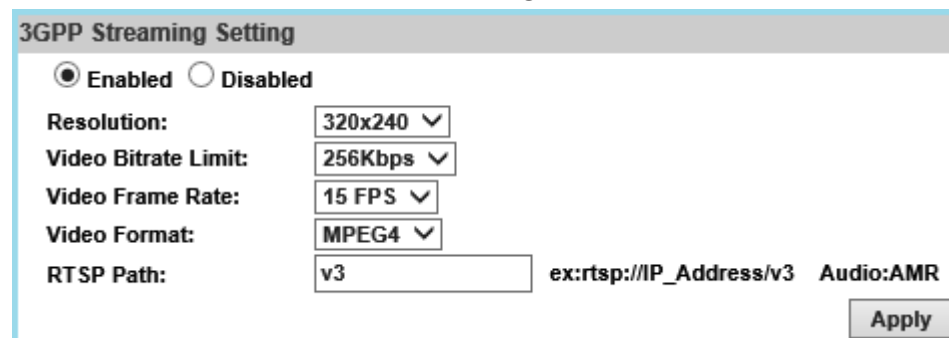

3GPP Streaming Setting

☒ Enabled ☐ Disabled

Resolution: ▼

Video Bitrate Limit: ▼

Video Frame Rate: ▼

Video Format: ▼

RTSP Path: ex:rtsp://IP_Address/v3 Audio:AMR

Resolution

640x480@15fps, 320x240@15fps

Video Bitrate

The higher Video Bitrate, the better the video quality is.

Video Frame Rate

The video refreshing rate per second.

Video Format


H.264+, H.264

RTSP Path

Offers the RTSP output connecting path.

Please click on the  button to keep the changes when all the settings are completed and confirmed.

Audio

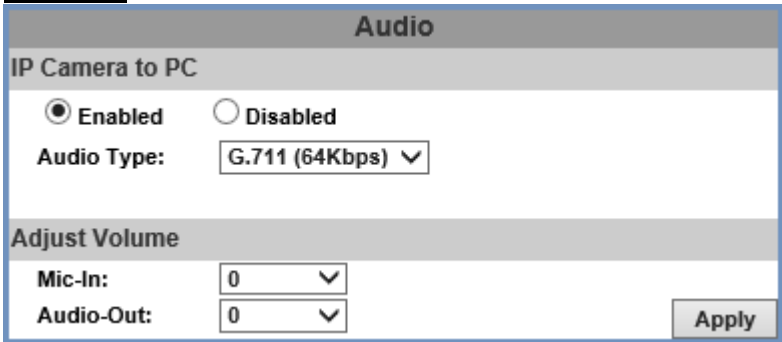

The screenshot shows a window titled "Audio". It has two main sections. The first section, "IP Camera to PC", contains two radio buttons: "Enabled" (which is selected) and "Disabled". Below these is a label "Audio Type:" followed by a dropdown menu currently showing "G.711 (64Kbps)". The second section, "Adjust Volume", contains two labels: "Mic-In:" and "Audio-Out:", each followed by a numeric input field set to "0" and a dropdown arrow. An "Apply" button is located at the bottom right of the window.

The user can send audio from the IP Camera built-in microphone to the remote PC and audio from remote PC to IP Camera's external speaker.

IP Camera to PC

Select **Enabled** to start and select the audio type. Tick **chatting** in the live browser to enable **PC to IP Camera** audio function.

The Audio may not be smooth when the SD card is recording.



The screenshot shows a "Chatting:" label followed by an unchecked checkbox. To the right of this is a label "Online Visitor : 1".

Adjust Volume

Select the volume of both **Mic-in** & **Audio-out**. Click on the **Apply** button to keep all the changes.

Sound Detection

Sound Detection(MIC-in)

☒ Enabled ☐ Disabled

☒ E-mail ☒ FTP ☒ Out1 ☒ Save to SD card ☒ Samba

Detection Sensitivity Level: 50db ▼



Test the audio volume and sound quality first by selecting **Enabled**. Tick the output destination of the audio file recorded.

Adjust the **Detection Sensitivity Level** from 40~90db to display the audio frequency level in the analytical graph.

Event List

Click  to get into the administration page. Click  to go back to the [live video](#) page.



The screenshot shows the IP Camera administration interface. On the left is a sidebar with navigation options: System Information, User Management, System Update, IP Setting, Advanced, PPPoE & DDNS, Server(Mail,FTP...), Network, Image Setting, Video Setting, A/V Setting, Audio, Event Setting, Schedule, I/O Setting, Log List, and Event. The main content area is titled 'System Information' and contains several sections:

- Server Information:**
 - MAC Address: 00:0F:0D:28:92:B0
 - Server Name: IP_Camera ☐ Status Bar
 - Language: ☒ English ☐ 繁體中文 ☐ 简体中文 ☐ French ☐ Russian ☐ Italian ☐ Spanish ☐ German ☐ Portuguese ☐ Polish ☐ Japanese
- OSD Setting:**
 - Time Stamp: ☐ Enabled ☒ Disabled
 - Text: ☐ Enabled ☒ Disabled
 - OSD_Display [Text Edit](#)
- Time Setting:**
 - Server Time: 2018/1/12 0:26:04 Time Zone: GMT+08:00
 - Date Format: ☒ yy/mm/dd ☐ mm/dd/yy ☐ dd/mm/yy
 - Time Zone: GMT+08:00
 - ☐ Enable Daylight Saving:
 - ☐ NTP:
 - NTP Server: pool.ntp.org
 - Update: 6 Hour
 - Time Shift: 0 Minutes [-1440..1440]
 - ☐ Synchronize with PC's time
 - Date: 2018/4/11
 - Time: 15:46:54
 - ☐ Manual
 - Date: 2018/4/11
 - Time: 15:46:51
 - ☒ The date and time remain the same

An 'Apply' button is located at the bottom right of the main content area.

The IP Camera provides multiple event settings.

Event Setting

Please change default password is a sign which appears on the preview screen as a reminder, to suggest you change login settings in [System](#) to secure your account privacy.

Motion Detection

A motion detection operation allows user to define a certain area which detects anything moving or changing its position within. It helps user to target on details inside a smaller picture, and effectively identify various surroundings of the monitored environment.



Whenever a motion is detected inside the framed area, the word **Motion** will appear on live screen and the data of notification can be sent to assigned directory for remote user.



Area Setting:	Area 1	Area 2	Area 3
Sensitivity:	5	5	5
☒ Area 1:	☒ E-mail ☐ FTP ☐ Out1 ☐ Save to SD card ☐ Samba ☐ Google Drive ☒ Dropbox		
☐ Area 2:	☐ E-mail ☒ FTP ☒ Out1 ☐ Save to SD card ☐ Samba ☒ Google Drive ☐ Dropbox		
☐ Area 3:	☐ E-mail ☐ FTP ☒ Out1 ☒ Save to SD card ☒ Samba ☐ Google Drive ☐ Dropbox		
Log :	☒ E-mail ☒ FTP ☒ Samba		
Subject:	IP Camera Warning!		
Interval:	10 sec a period of time between every two motions detected.		
☒ Based on the schedule			

- **Area Setting:** Click any of the

Area 1

Area 3

Area 2

 icons to start drawing 3 areas on the preview screen with your mouse in 3 different colors. Click any **Area** icon again to discard the motion area which has been made.
- **Sensitivity:** Adjust the level of the responsiveness defined as motion detection. The higher number assigned, the more sensitive, vice versa.
- **Area 1/2/3:** Data of events triggered within the motion area can be assigned by marking the checkboxes of the source and destination. For example, if you mark the **Save to SD card** checkbox from **Area 3**, the video or snapshot triggered in **Area 3** motion area will be saved to the **Micro SD card**.
- **Log:** Popped up after **Save to SD card** checkbox is ticked by your mouse. Check **E-mail/ FTP/ Samba** checkboxes on the **Log** option to send the motion detection log to **E-mail/ FTP/ Samba** simultaneously.
- **Subject:** Type in the message you would receive when motion is detected. The default message is "**IP Camera Warning!**".
- **Interval:** For example, when selecting **10 sec**, once the motion is detected and the action is triggered, it cannot be triggered again within 10 seconds.
- **Based on the schedule:** Assign the timetable managed from [Schedule](#) to enable motion detection after the option checkbox is ticked.

Tampering Detection

Tampering Detection	
Tampering:	☐ Enabled ☒ Disabled
	☐ E-mail ☐ FTP ☐ Out1 ☐ Save to SD card ☐ Samba
Interval:	30 sec ▼

When the camera view is covered, moved, hit by strong light, or out of focus, the tampering detection will be triggered, and send snapshot to mail/FTP/Samba/SD card, or trigger the external alarm. For example:

Before Tampering Detection



Tampering Triggered (Defocused)



Before Tampering Detection



Tampering Triggered (Lens Covered)



Before Tampering Detection



Tampering Triggered (Glare)




Before Tampering Detection



Tampering Triggered (Camera Moved)



- **Interval:** The tampering detecting interval. Take the diagram below as example. The interval is set for 30 second; the camera lens is covered during 10 - 40 sec.

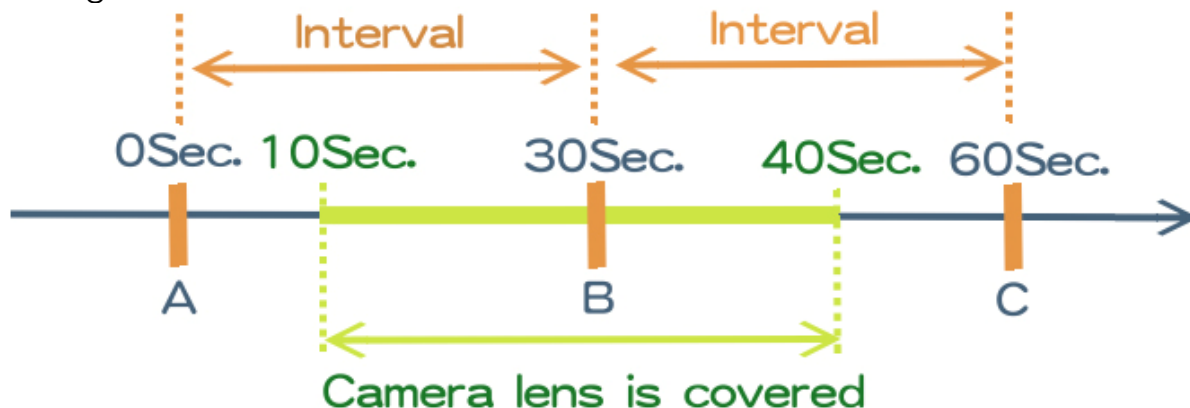

At time point B, the camera compares the view with time point A, and sends an alarm when it finds that the lens is covered.

At time point C, the camera compares the view with time point B, and sends an alarm when it finds that the lens is uncovered.

Record File

Record File	
File Format:	AVI File(with Record Time Setting) ▼

When an event occurs, the camera will record a video clip or take snapshot, and then send to mail/ FTP/ Samba. Select the file format to be saved.

- **AVI File (with Record Time Setting):** Save AVI video file. The video length is according to the value set in [Record Time Setting](#).
- **JPEG Files (with Record Time Setting)*Only Streaming 1 with JPEG file format.:** Only when selecting "JPEG" in [streaming 1 video format](#) of [Video Setting](#), this option can be enabled. Select this option to save several JPEG picture files. The successive picture files cover a period of time according to the value set in Record Time Setting.
- **JPEG File (Single File with Interval Setting):** Save single JPEG picture file when the event occurs.

Record Time Setting

Record Time Setting			
Pre Alarm:	5 sec ▼	Post Alarm:	5 sec ▼

When an event occurs, the IP camera can record a video clip or take a snapshot, and then send it via mail/ FTP/ Samba. Select the video recording length before and after the event is detected.

The screenshot shows the 'Motion Detection' settings. Key settings include:

- Area 3:** ☒ Save to SD card
- Subject:** IP Camera Warning!
- Interval:** 10 sec (a period of time between every two motions detected).
- Record File:**
 - File Format:** AVI File(with Record Time Setting)
 - Record Time Setting:**
 - Pre Alarm:** 5 sec
 - Post Alarm:** 5 sec

 Below the settings is a timeline diagram. A blue arrow represents time. Green vertical lines mark 'MOTION!' events. Red curved arrows indicate recording periods of 5 seconds before and after each motion. A purple bracket labeled '10 sec.' spans the interval between two motions, indicating that motion occurring within this interval is not recorded.

Network Dis-connected

The screenshot shows the 'Network Dis-connected' settings. It includes:

- Dis-connected:** ☐ Save to SD Card
- (When Schedule Record Enable, it'll stop saving to SD card)**

The image will be recorded to the SD card after the IP Camera detects network disconnection once **"Save to SD card"** is ticked.

Network IP Check

The screenshot shows the 'Network IP Check' settings. It includes:

- IP Check:** ☐ Enabled ☒ Disabled
- IP Address:** www.google.com
- Interval:** 30 sec
- Check failed:**
 - ☐ Connection failed four times. Reboot IP Camera.
 - ☐ Save to SD card
- (When Schedule Record Enable, it'll stop saving to SD card)**
- (When IP check failed, first step will save to SD card, continuing other saving storage)**
- Apply** button

After enabling IP Check, the IP camera can check if the network server is connecting. If the checking fails for 4 times, the camera will reboot.

Click **Apply** to update all the settings adjusted.

Schedule

Schedule

Tick the grids on the calendar to manage your schedule time.

Schedule

Profile1

All	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Mon.																								
Tue.																								
Wed.																								
Thu.																								
Fri.																								
Sat.																								
Sun.																								

 With schedule setup.

Profile: Profile1 ▼
 Profile1 Name: Profile1

Profile

Select a Profile from the drop down list.

Profile(1,2,3) Name

Input & assign a profile name for each profile.

Schedule

Profile2

All	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Mon.																								
Tue.																								
Wed.																								
Thu.																								
Fri.																								
Sat.																								
Sun.																								

 With schedule setup.

Profile: Profile2 ▼
 Profile2 Name: Profile2

Schedule

Profile3

All	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Mon.																								
Tue.																								
Wed.																								
Thu.																								
Fri.																								
Sat.																								
Sun.																								

 With schedule setup.

Profile: Profile3 ▼
 Profile3 Name: Profile3

Snapshot & Record

Record

After completing the [Schedule](#), the camera data will be recorded according to the schedule made from the calendar.

The screenshot shows the 'Snapshot & Record' configuration window. The 'Record' tab is active, indicated by a selected radio button. Below the tab, there are three radio buttons: 'Record' (selected), 'Snapshot', and 'Close'. Under the 'Record' section, there are two radio buttons: 'Save to SD card' and 'Disabled' (selected). Below these, there are two dropdown menus: 'Record Memory' set to '50MB' and 'Schedule Profile' set to 'Profile1'.

Beware that SD cards may fail for being recorded for a long period of time. You may set up how much you would like the SD card memory to be used in order to estimate the right time to swap a new one. Assign the **Schedule Profile** time selected from the drop-down list first.

Snapshot

After enabling the snapshot function; the user can select the storage position, interval time and reserved file name of the snapshot. Assign the **Schedule Profile** time selected from the drop-down list first.

The screenshot shows the 'Snapshot & Record' configuration window with the 'Snapshot' tab active. The 'Snapshot' radio button is selected. Below the tab, there are three radio buttons: 'Record', 'Snapshot' (selected), and 'Close'. Under the 'Snapshot' section, there are two radio buttons: 'Enabled' and 'Disabled' (selected). Below these, there are four checkboxes for storage locations: 'E-mail', 'FTP', 'Save to SD card', and 'Samba'. Below the checkboxes, there are three input fields: 'Interval' set to '10' with the unit 'Second(s) [1..50000]', 'File Name' set to 'Snapshot', and 'Schedule Profile' set to 'Profile1'.

Interval: Users can set the interval between two snapshots.

File Name: Enter the file name of your snapshot file.

Restart IP Camera Automatically

Set up the time for IP camera to restart automatically after ticking **Restart** to enable access.


The screenshot shows the 'Restart IP Camera Automatically' configuration window. It features a checked checkbox for 'Restart'. To the right of the checkbox are three dropdown menus: 'Every week', 'Sunday', and '00:00'. An 'Apply' button is located at the bottom right of the window.

Click  to update all the settings adjusted.

I/O Setup

Enter [I/O Setting](#) via internet browser & check Out1 to enable I/O signal.

I/O Connection

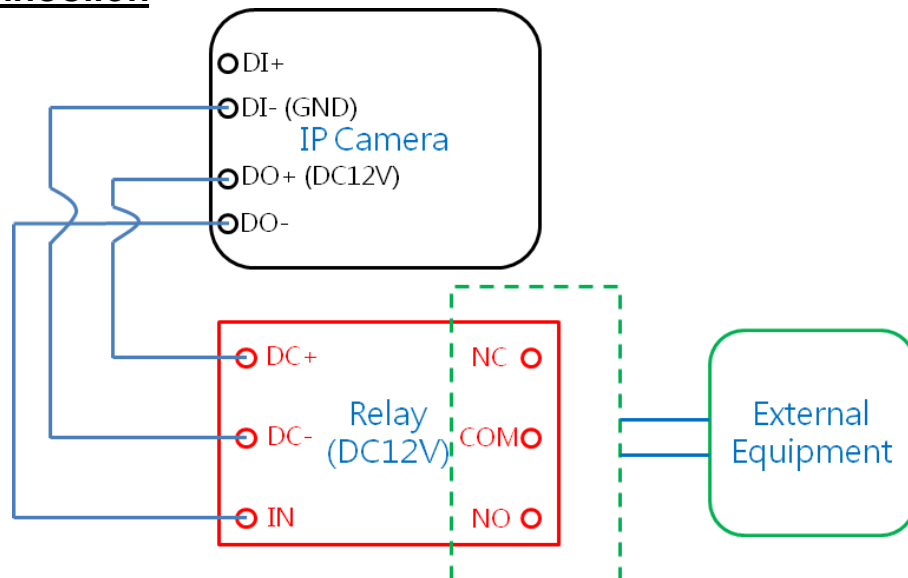

Connect the GND & DO pin to the external relay (buzzer) device.
Connect the GND & DI pin to the external trigger device.

I/O PIN Definition

GND (Ground): Initial state is LOW

DO (Digital Output): Max. 50mA „DC 12V

DI (Digital Input): Max. DC 6V

Input Setting

I/O Setting	
Input Setting	
Input 1 Sensor:	N.O ▼
Input 1 Action:	☒ E-mail ☒ FTP ☒ Out1 ☒ Save to SD card ☒ Samba
Log:	☐ E-mail ☐ FTP ☐ Samba
Subject:	GPIO In Detected!
Interval:	10 sec ▼
☒ Based on the schedule	
Schedule Profile:	Profile1 ▼

The IP camera supports both input and output operations. When the input condition is triggered, the relay will be also triggered & a notification will be sent depending what checkboxes are ticked.

Log

Tick **Save to SD card** to enable the [Log](#) you would like to save data with.

Subject

Input & edit the message you would receive for triggered alarm.

Interval


For example, if you select "10 sec" here, once the motion is detected and action is triggered, it cannot be triggered again within 10 seconds.

Based on the schedule

Tick its checkbox to assign timetable from [Schedule](#). Once the option is activated, only during the selected schedule time the I/O is enabled. Assign The [Profile](#) timetable selected from the drop-down list first.

Output Setting

The output mode affects the DO or relay out duration.

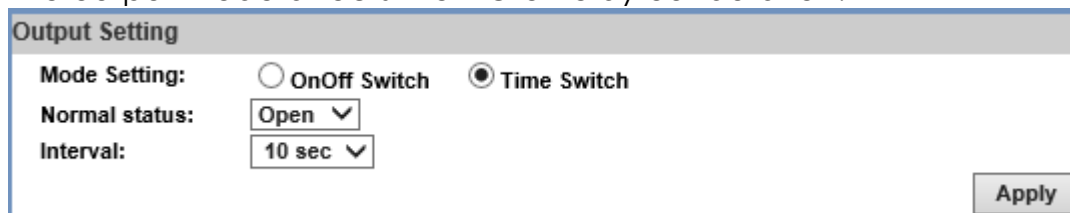

The 'Output Setting' dialog box contains the following controls:

- Mode Setting:** Two radio buttons, 'OnOff Switch' and 'Time Switch'. 'Time Switch' is selected.
- Normal status:** A dropdown menu currently showing 'Open'.
- Interval:** A dropdown menu currently showing '10 sec'.
- Apply:** A button in the bottom right corner.

Mode Setting

ON/Off Switch

The camera triggers the external device and lasts for 10 seconds. Enable the **OnOff Switch** in **Output Setting** by clicking beside its title. You can turn off the alarm manually by clicking "off" at the right bottom of the [live video](#) page.



Select **Open** (N.O) or **Close** (N.C) for its sensor from **Normal Status**.

Time Switch

The camera triggers the external device and lasts for certain time according to the internal setting, and the user is not allowed to break off the alarm manually. Enable **Time Switch** by clicking beside the title, and then adjust the **Normal Status** & **Interval** to your desired level.

Click on the  button to keep all the changes.

Log List

Log List	
System Logs	Logs
Motion Detection Logs	Logs
I/O Logs	Logs
All Logs	Logs

The log keeps data for user to check through events which have occurred during the monitoring operation. Click each **Logs** to open different log data.

All Log	
<System>	[2017/11/23 15:17:39] Language changed to Trad. Chinese.
<System>	[2017/11/23 15:17:21] 220.135.138.67 login by admin.
<System>	[2017/11/23 15:12:20] 220.135.138.67 login by admin.
<System>	[2017/11/23 15:12:15] 220.135.138.67 login by Anonymous.
<System>	[2017/11/23 15:12:15] 220.135.138.67 login by Anonymous.

System Logs won't lose data due to power failure. Choose **All Logs** to list out all the events from **Motion Detection Logs** to **I/O Logs**.

SD Card

Playback

Playback

20171107
20171108
20171109

Record

20171109

SD Card: << 9273M / 30416M >>

SD Management

Auto Deletion: Off (Keep 1/ 2/ 3/ 4...days)

Format SD Card

It only support FAT32 format for SD card over 64G Please format SD card into FAT32 before installation

Apply

Insert Micro SD card into the card slot thoroughly before starting this operation. Click the date under **Playback** title & a list of files will pop up.

2017/11/07			Del
Time	Video	Event Type	☐
21:46:01	214601m.avi	Motion Detection	☐
21:46:24	214624m.avi	Motion Detection	☐
21:47:14	214714m.avi	Motion Detection	☐
21:55:15	215515m.avi	Motion Detection	☐
21:55:27	215527m.avi	Motion Detection	☐
21:56:13	215613m.avi	Motion Detection	☐
21:56:24	215624m.avi	Motion Detection	☐
21:56:55	215655i	IVS	☐
21 o'clock	21 o'clock	Schedule Snapshot	☐
22:02:45	220245i	IVS	☐


Files link daily.

For example, if the date **2017/11/07** is clicked, all the events happened within that time frame will then appear in a list.

The enlisted files under **Video** category are files representing an event. There are 3 types of file formats, and each is different for its own **Event Type**. Notice how the file name formations under the **Video** category represent the time when a file is created.

For instance, the file name "**214601m.avi**" means the video is recorded at **21:46:01** today, **m** means **Motion Detection**, and **avi** represents the file format.

Click on the file name to open the file.

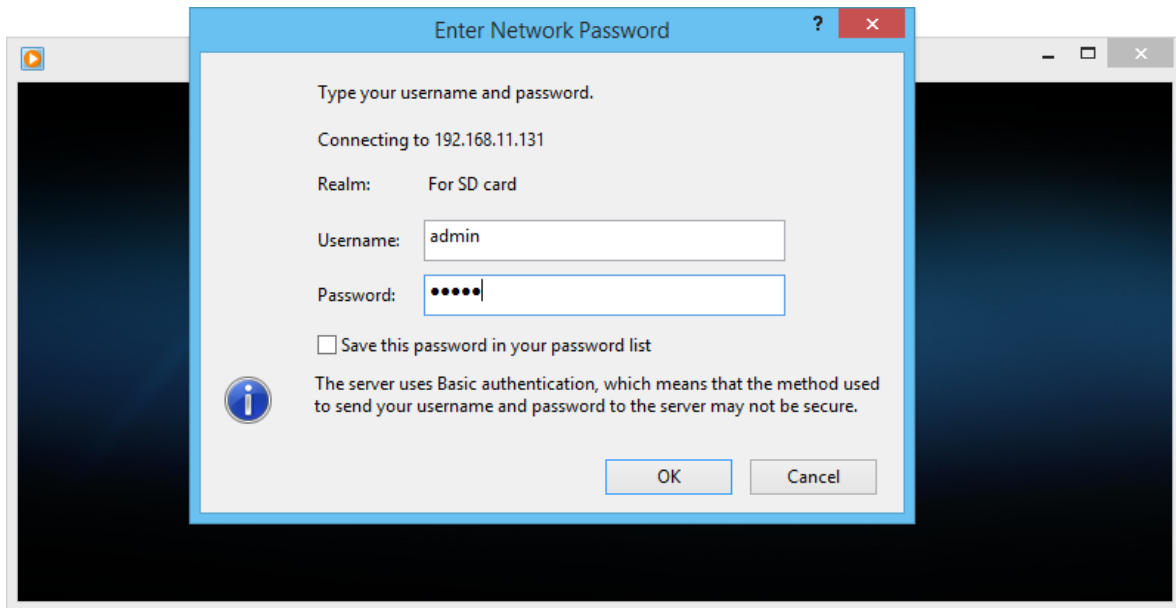


For **avi** files, you need Microsoft Media Player which is supposedly built-in in your PC. The default Username & Password for playing the video file are both **admin**.

Clicking on an **IVS** file (such as **215655i**) will bring out a pop-up window suggesting an **IVS** event captured as snapshots as the one below:



Clicking on any title that is labeled with “**time unit**” (such as **21 o'clock**) at the end will bring out a pop-up window indicating the snapshot taken as scheduled in **Schedule** mode and enabled in **Snapshot** mode.

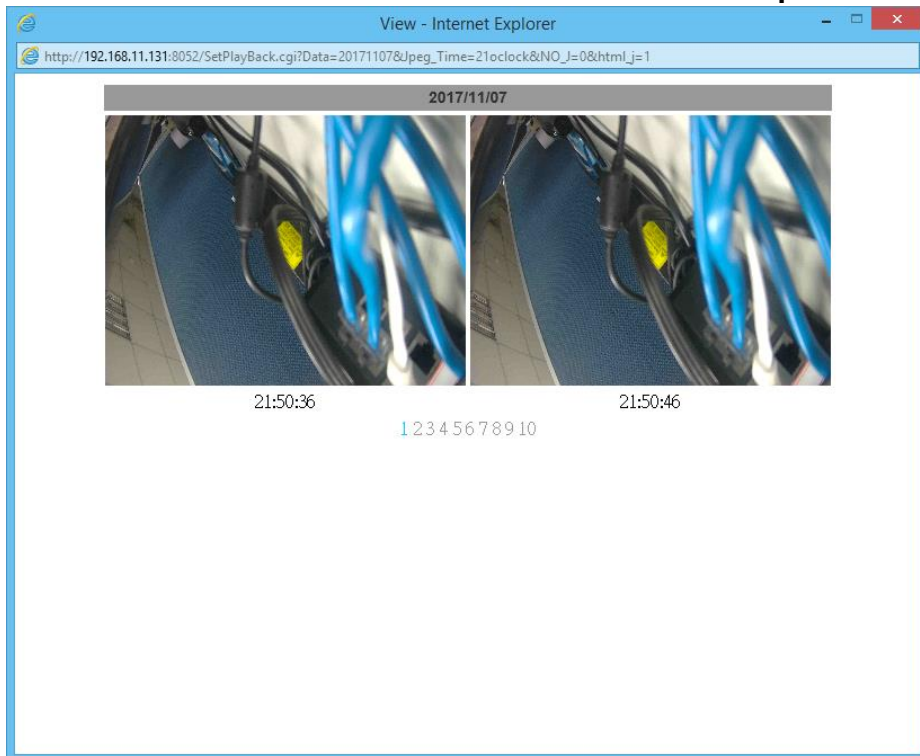

Click the  icon to delete any file by marking on the checkbox under the **Del** category with a mouse click.

Record

The recording mode is enabled after **Record** is set in **Schedule** mode. Take the schedule calendar below for example, the grids coloured in green between 3~12 are scheduled to start recording from 3 o'clock to 12 o'clock from Monday to Thursday.

Schedule																								
All	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Mon.																								
Tue.																								
Wed.																								
Thu.																								
Fri.																								
Sat.																								
Sun.																								

With schedule setup.

Once the recording mode is on, the video data recorded will be found and labelled as **2017/11/09**.




Click on **2017/11/09** to enter the next page where all files recorded on that date are enlisted.

2017/11/09				Del
Time	Video	Event Type		☐
03:00:00	030000r	Record		☐
04:00:00	040000r	Record		☐
05:00:00	050000r	Record		☐
06:00:00	060000r	Record		☐
07:00:00	070000r	Record		☐
08:00:00	080000r	Record		☐
09:00:00	090000r	Record		☐
10:00:00	100000r	Record		☐
11:00:00	110000r	Record		☐
12:00:00	120000r	Record		☐

1 2


Files link daily.

Click on any video title to open Microsoft Media Player (supposedly already built-in in your PC) and play the video file. Key-in **admin** for both Username & Password to get permission to view the video.

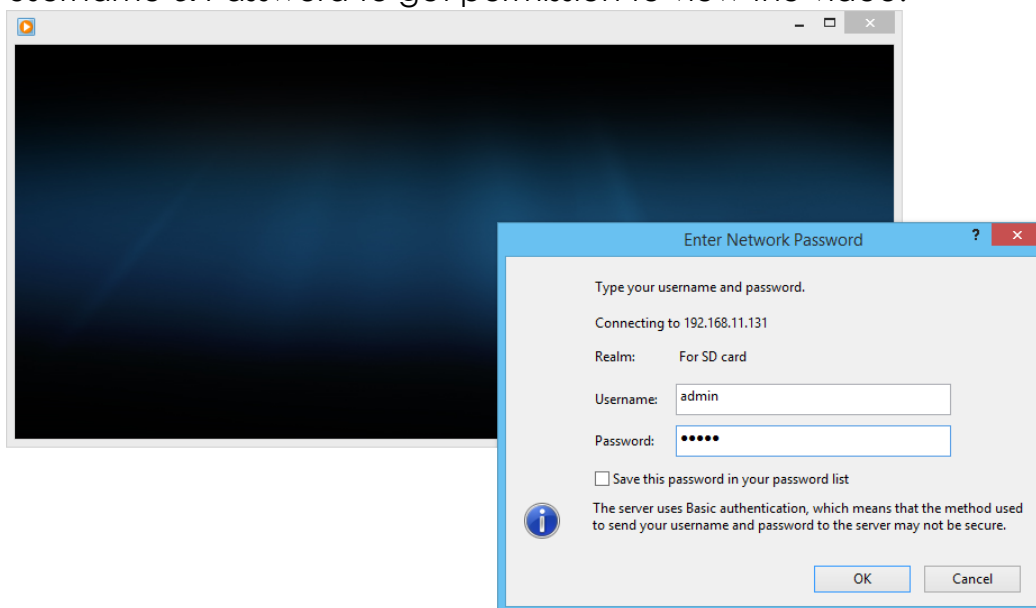

The number at the bottom indicates the distributive law of the current SD Card memory which is divided and assigned to different types of recording purposes.

The left side shows how much memory is still available, and the right side shows how much the total memory is.




If the memory of the SD card is **over 128G**, **70%** of the memory will be used for scheduled recording, and **30%** will be used for event recording.

If the memory of the SD card is **below 128G**, **50%** of the memory will be used for scheduled recording, and **50%** will be used for event recording.

Click the  icon to delete any file with its checkbox checked under the Del category.

SD Management

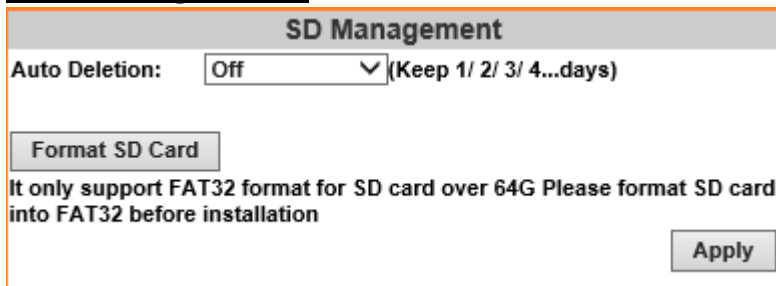

The SD Management interface includes a title bar 'SD Management'. Below it is a section 'Auto Deletion:' with a dropdown menu set to 'Off' and a note '(Keep 1/ 2/ 3/ 4...days)'. There is a button 'Format SD Card'. Below the button is a warning message: 'It only support FAT32 format for SD card over 64G Please format SD card into FAT32 before installation'. At the bottom right is an 'Apply' button.


Auto Deletion

Choosing "The 1st day" means the recording file will be kept for one day. Example: It is five o'clock now. Choose "The 1st day". The files will be kept from five o'clock yesterday to five o'clock today. The oldest file will be deleted if the Micro SD card is full. **Note: The use of the SD card will slightly affect the operation of the IP Camera, such as affecting the frame rate of the video.**

Format SD Card

Click the icon to process the SD Card formatting into FAT32 format. Be cautious that since it only supports FAT format for SD Card over 64G, please format SD Card into FAT32 before installation.

SD Card Files

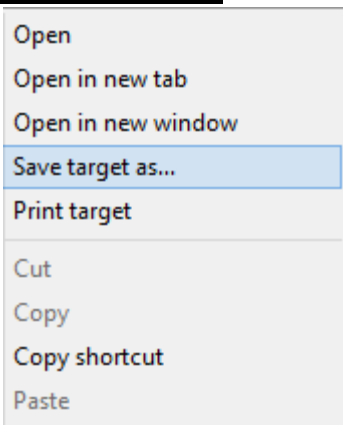


Downloading the Files

For both **Playback** and **Record** mode, after entering a date data to see the **Video** and **Event Type**, right-click on a title under the **Video** list, and choose “**Save Target As...**” from its pop-up window to start downloading the file.

Linking the Files

For both **Playback** and **Record** mode, find the **Files link daily.** link at the right corner of the bottom after entering a date data to see the **Video** and **Event Type**. Click on the link, a window will pop up.

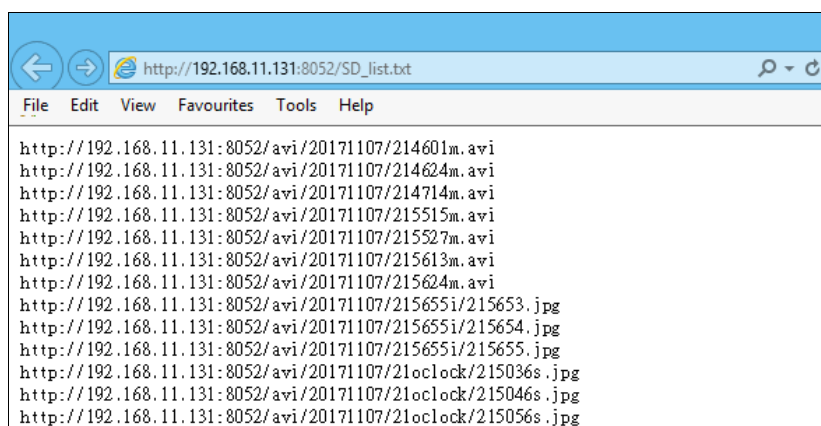

You may copy any of the protocol provided in the window and paste it on a web browser as a URL address to look at each file.


Copy to PC

You can insert the Micro SD card to the PC and read the files directly, or use FlashGet instead to download the files from the IP camera. (In this way you do not need to pull out the Micro SD card from the camera.) To use FlashGet for downloading image and video data from the Micro SD card, please follow the steps:


- i. Enter data list and right-click “ **Files link daily.**”, select “save target as...” then save the link list to PC.




- ii. Open FlashGet, select "File" → "Import" → "Import list", and find the link list file you just saved. The file name may be called "SD_list".

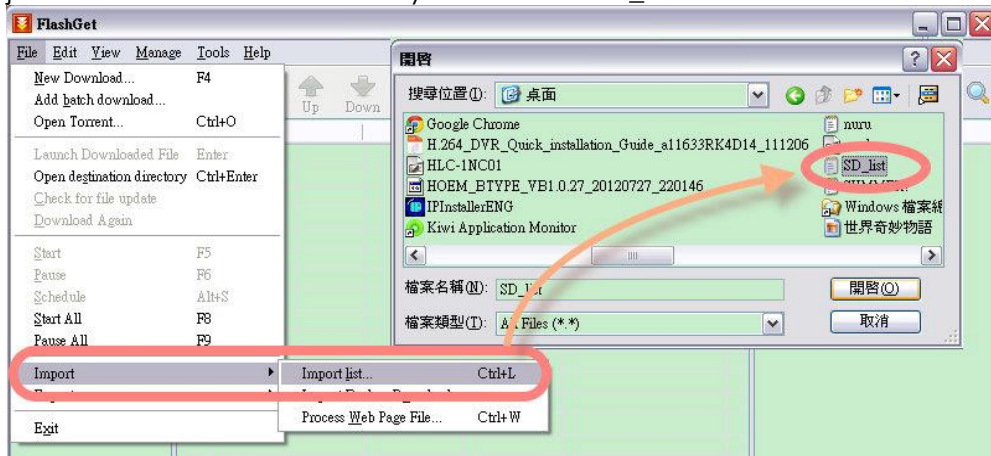

- iii. FlashGet will show you the link list, and you can tick the files you want to copy to your PC. Give the directory path in the new download window, and remember to enable "Login to Server": key in the IP Camera username and password.

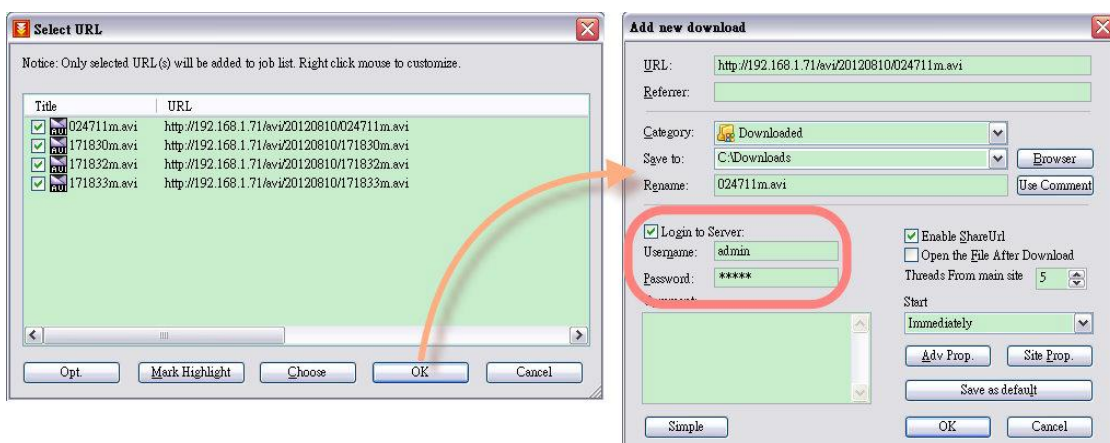


- iv. Click OK to start download.

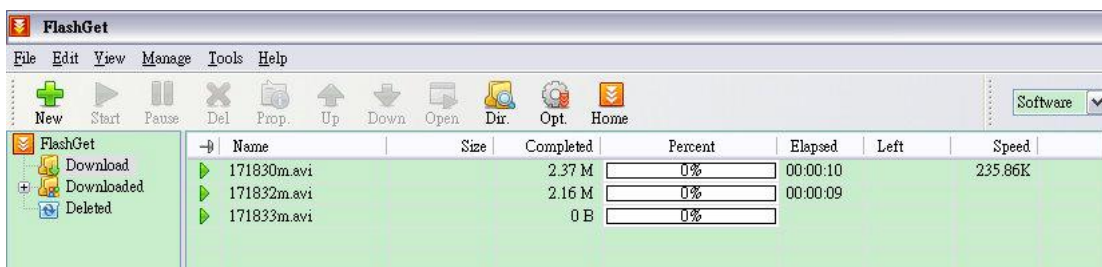

- FlashGet is free software that can be downloaded from [FlashGet](http://www.flashget.com/) official website. The example above is based on FlashGet ver.1.9.6.


NETWORK CONFIGURATION

Configuration I

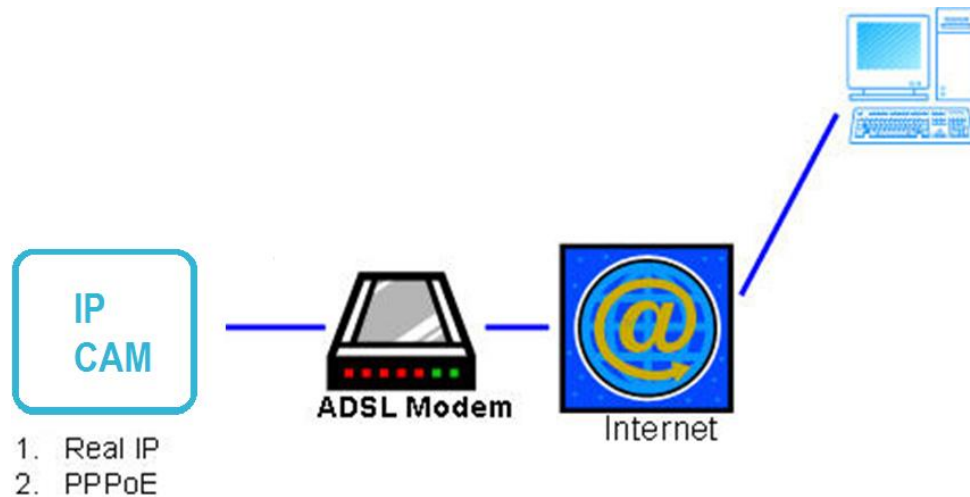

- Internet Access: ADSL or Cable Modem
- IP address: One real IP or one dynamic IP
- Only the IP Camera is connected to the internet
- For fixed real IP, set up the IP into IP Camera. For dynamic IP, start PPPoE.


Configuration II

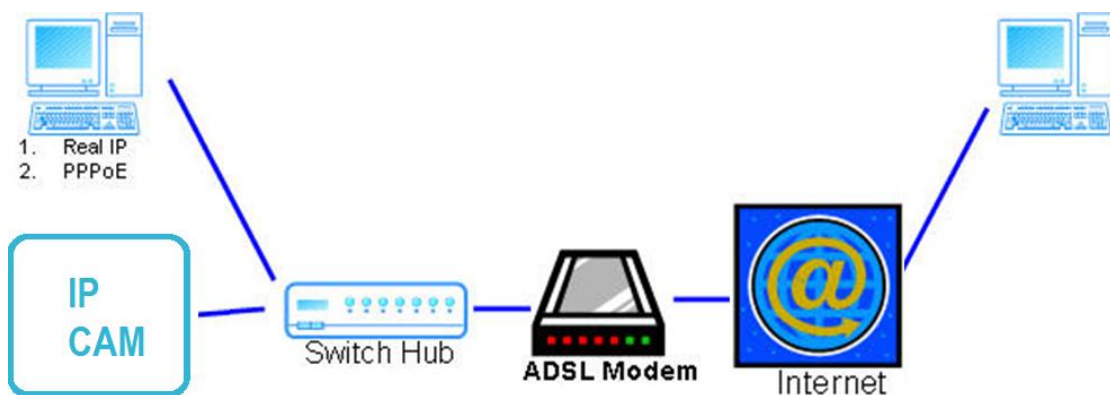

- Internet Access: ADSL or Cable Modem

- IP address: More than one real IP or one dynamic IP
- IP Camera and PC connect to the internet
- Device needed: Switch Hub.
- For fixed real IP, set up the IP into IP Camera and PC. For dynamic IP, start PPPoE.

Configuration III

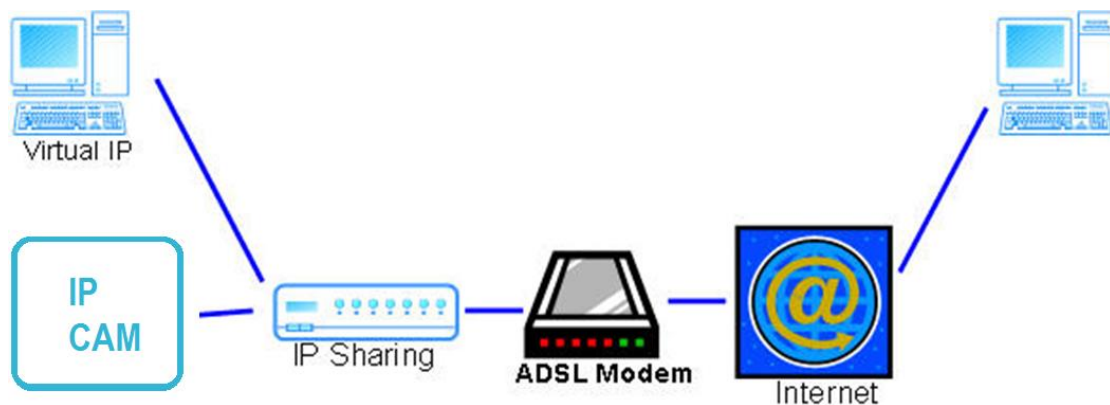


- Internet Access: ADSL or Cable Modem
- IP address: one real IP or one dynamic IP
- IP Camera and PC connect to the internet
- Device needed: IP sharing
- Use virtual IP, set up port forwarding in IP sharing


FACTORY DEFAULT

If you forget your password, please follow the steps below to restore its default settings.

- Remove the power and Ethernet cable.
- Join **GND** & **Default** ports inside the terminal block with an electronic wire.

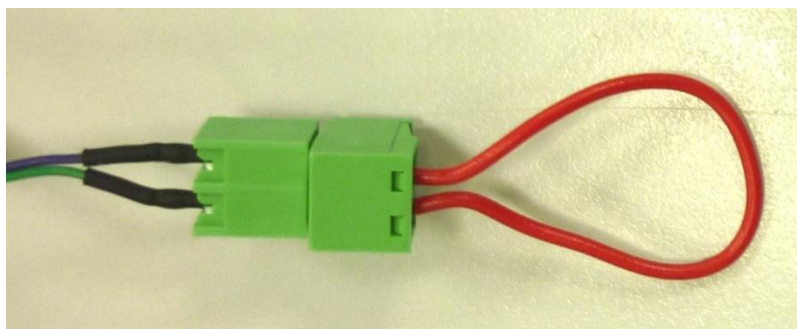

- Connect the power for the camera to reboot for around 30 seconds.
- Remove the wire in the terminal block after rebooting completes.
- Open the internet browser using default IP (<http://192.168.1.200>)
- Input **admin** for both user name and password to log in.

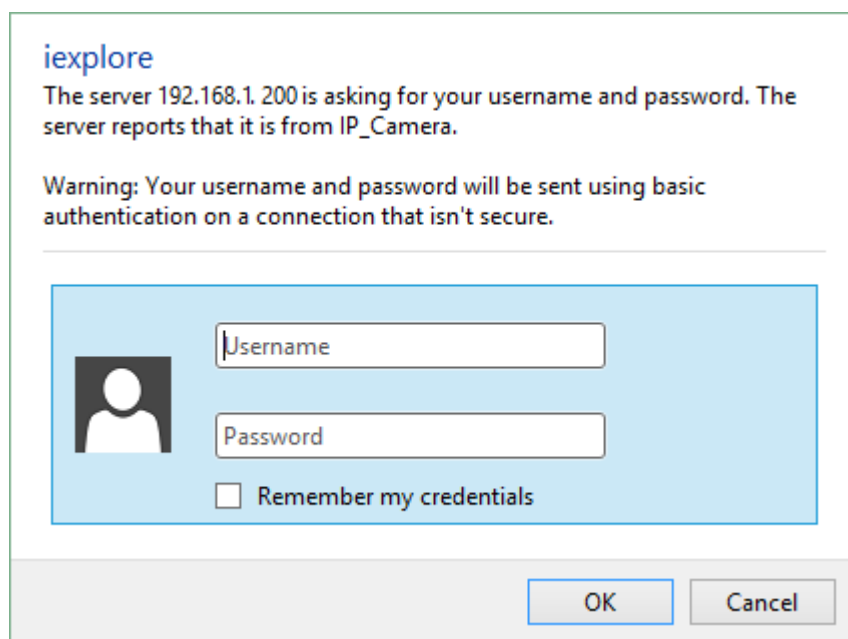

iexplore

The server 192.168.1.200 is asking for your username and password. The server reports that it is from IP_Camera.

Warning: Your username and password will be sent using basic authentication on a connection that isn't secure.

☐ Remember my credentials

OK Cancel


- ✧ You may also perform [Factory Default](#) through **System Update** when you operate the camera by remote. Please refer to [System](#) chapter for more instructions.

UNIVERSAL PASSWORD

If you forgot the password of your IP camera, you can reset the camera to factory default, or follow the procedure below to generate a universal password.

Note: Universal password will be valid only when you enable the function in [User Management](#).

- i. First, you need to know the IP address and MAC address of your IP camera. You can use [IP Scanner](#) to scan the LAN, and see the IP address and MAC address on the side column.

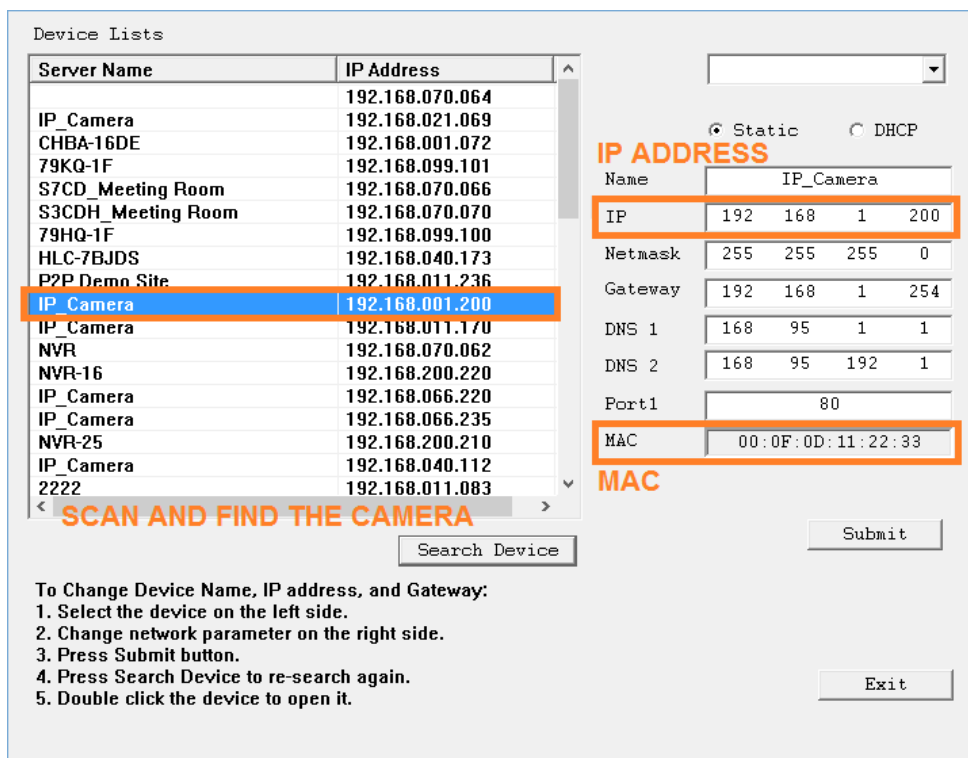

The screenshot shows the 'Device Lists' section with a table of discovered devices. The 'IP_Camera' device with IP address 192.168.001.200 is selected. To the right, the 'IP ADDRESS' configuration section is visible, showing the selected IP, Netmask, Gateway, and MAC address. The MAC address is 00:0F:0D:11:22:33. Below the table, there is a 'SCAN AND FIND THE CAMERA' button and a 'Search Device' button. At the bottom, there are instructions on how to change device name, IP address, and Gateway, and buttons for 'Submit' and 'Exit'.

Server Name	IP Address
IP_Camera	192.168.070.064
CHBA-16DE	192.168.021.069
79KQ-1F	192.168.001.072
79KQ-1F	192.168.099.101
S7CD_Meeting Room	192.168.070.066
S3CDH_Meeting Room	192.168.070.070
79HQ-1F	192.168.099.100
HLC-7BJDS	192.168.040.173
P2P Demo Site	192.168.011.236
IP_Camera	192.168.001.200
IP_Camera	192.168.011.170
NVR	192.168.070.062
NVR-16	192.168.200.220
IP_Camera	192.168.066.220
IP_Camera	192.168.066.235
NVR-25	192.168.200.210
IP_Camera	192.168.040.112
2222	192.168.011.083

IP ADDRESS

Name: IP_Camera

IP: 192 168 1 200

Netmask: 255 255 255 0

Gateway: 192 168 1 254

DNS 1: 168 95 1 1

DNS 2: 168 95 192 1

Port1: 80

MAC: 00:0F:0D:11:22:33

MAC


Submit

Exit

To Change Device Name, IP address, and Gateway:

1. Select the device on the left side.
2. Change network parameter on the right side.
3. Press Submit button.
4. Press Search Device to re-search again.
5. Double click the device to open it.

- ii. Or else, if you already know the IP address of camera: Open the web browser, key in **http:// (IP address) /GetIPMAC.cgi** and press enter. The IP address and MAC address will be displayed on browser.

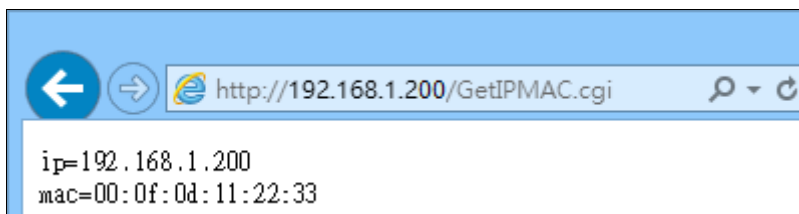


The screenshot shows a web browser window with the address bar containing 'http://192.168.1.200/GetIPMAC.cgi'. The main content area displays the following information:

```
ip=192.168.1.200
mac=00:0f:0d:11:22:33
```

- iii. Locate the .html file named [Universal Password V1.1](#) in the [Universal Password folder](#) from the [Applications](#) folders in CD-ROM. Open it with an IE web browser.



- iv. Fill in the IP address, MAC and click encoder, the universal username and password will then be generated. Note: If you change the camera IP address, the universal password will change, too.

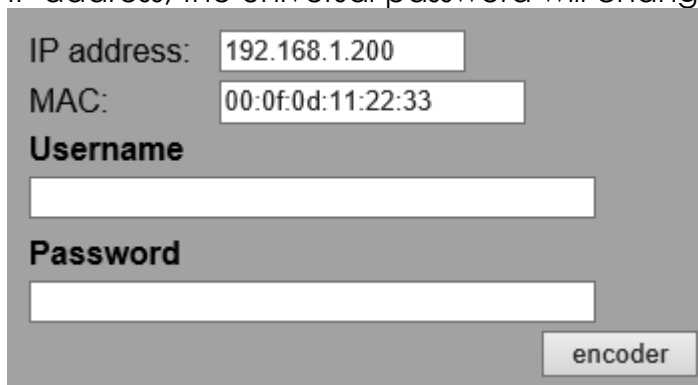


IP address: 192.168.1.200
MAC: 00:0f:0d:11:22:33
Username

Password


encoder

- v. Log into the camera using the generated username & password.







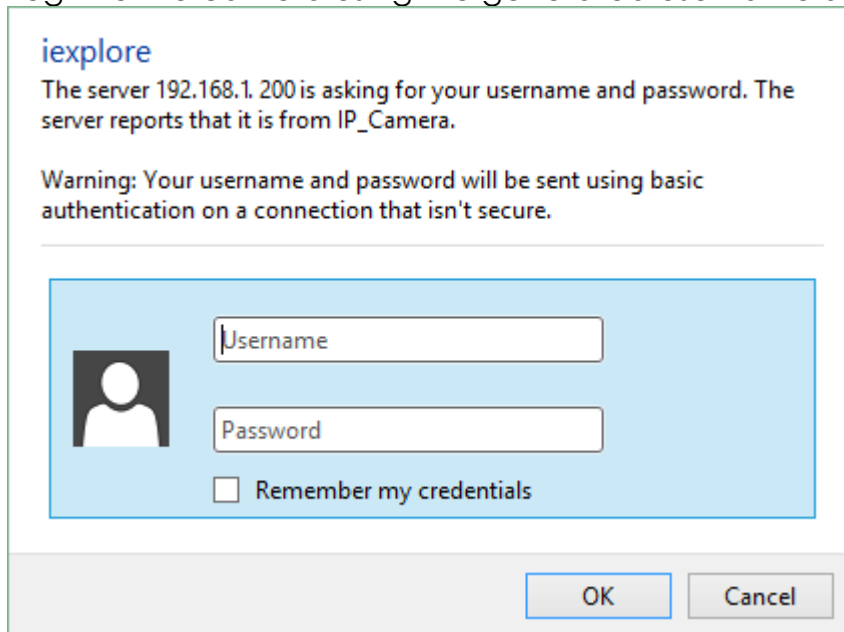


iexplore
The server 192.168.1. 200 is asking for your username and password. The server reports that it is from IP_Camera.
Warning: Your username and password will be sent using basic authentication on a connection that isn't secure.
 Username
 Password
☐ Remember my credentials
OK Cancel

- vi. Now you can login as administrator. Turn to [User Management](#) page. The use of universal password does not affect the previous user setting, so the administrator account password does not change until you edit it. Please click **Edit** to give a new administrator password.

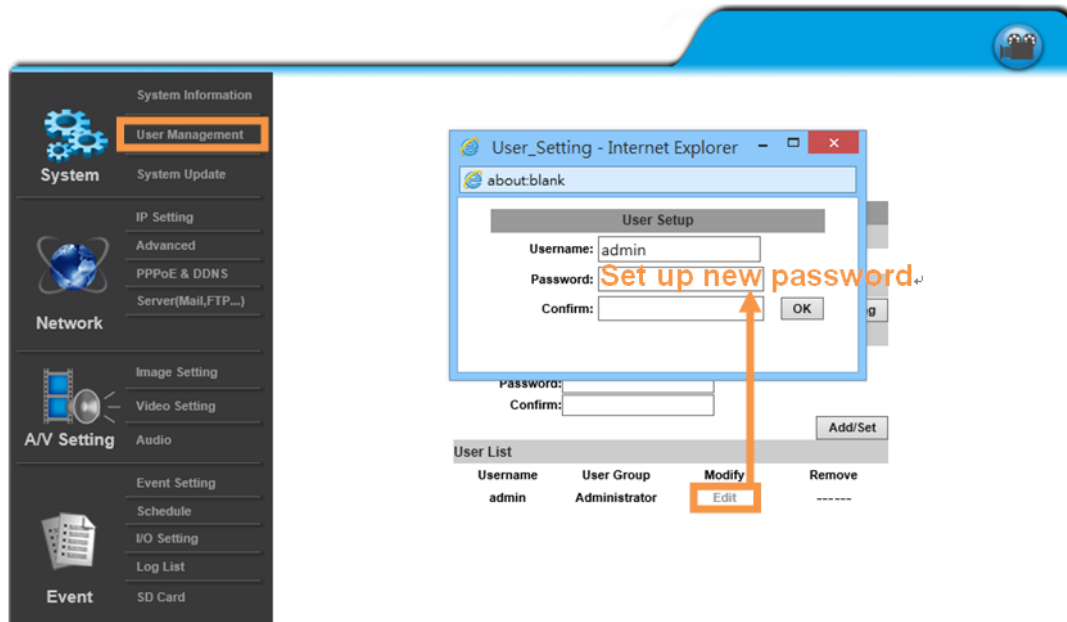

PACKAGE CONTENTS

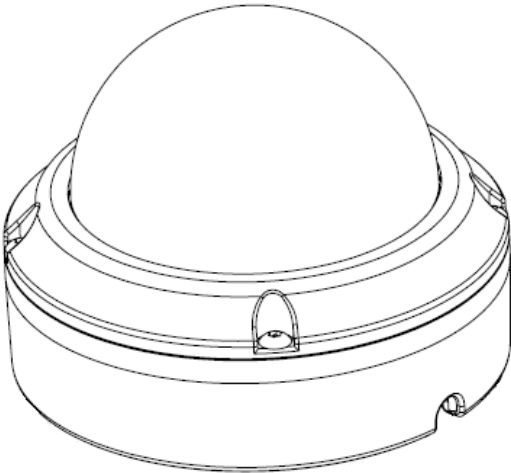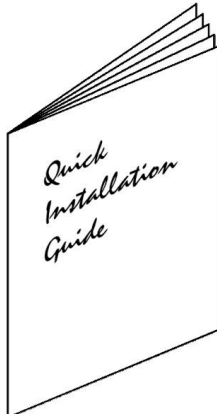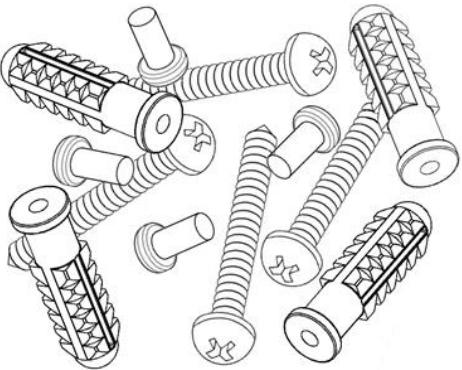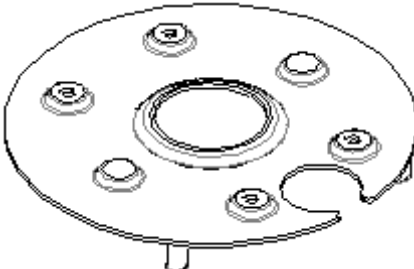IP Camera		Quick Installation Guide	
			
Star Wrench	CD	Silica Gel	
			
Screws Pack		Mount Plate	
			

- The CD includes user manual and software tools

MICRO SD CARD COMPATIBILITY (OPTIONAL)

The following are the recommended Micro SD Cards:

Transcend	SDHC class4 16GB
	SD class4 16GB
	SDHC class4 32GB
	SD class4 32GB
	SD class6 4GB
	SDHC class6 4GB
	SD class6 8GB
	SDHC class6 8GB
	SD class6 16GB
	SDHC class6 16GB
	SDHC class10 4GB
	SDHC class10 8GB
	SDHC class10 16GB
	SDHC class 10 Max. 64GB
SanDisk	SDHC class4 8GB
	SDHC class4 16GB
	SDHC class4 32GB
	SDHC class10 Max. 128GB