

## Product Datasheet

# 3-port 10/100M PoE Extender

(ONV-PSE-PD3102)



## OVERVIEW

ONV-PSE-PD3102 is a simple device which can extend the 100m standard data transmission to 200m through CAT5e/6 UTP cable, by just plug and play but no additional power supply or set up required. It offers you great flexibility to extend the distance of PoE network to triple, quadruple further in length or more. And this device supports forwards both Ethernet data and PoE power to remote devices

For the cost saving and power management purpose, the ONV-PSE-PD3102 can be widely used for City intelligent traffic monitoring system (ITS), safe city, and wireless city; large industrial factory & enterprise security surveillance system; Highway surveillance system, electronic road surveillance, snapshot system; Remote multimedia teaching & campus surveillance, video conferencing systems; Building intercom, wireless communications, video surveillance.

## FEATURE


- ◆ Supply power to IP network cameras through Cat5e cables (PoE)
- ◆ Compatible with IEEE 802.3af PSE devices
- ◆ Support 10/100M data transmission through RJ45 port
- ◆ Auto-negotiation and auto-MDIX fast Ethernet RJ45 port
- ◆ Both mid-span ( 4/5+, 7/8- ) and end-span ( 1/2+, 3/6- )
- ◆ IEEE802.3af; IEEE 802.3i; IEEE 802.3u; IEEE 802.3x Flow Control; IEEE 802.3af DTE Power via MDI
- ◆ 100Base-TX : Cat5 UTP(≤100 meters)
- ◆ Store-And-Forward architecture
- ◆ 2x RJ45 PoE ports; maximum 15.4W for single PoE port
- ◆ Front-end receiving and Back-end supply power

## TECHNICAL SPECIFICATION

Model	ONV-PSE-PD3102
Description	10/100M PoE extender, extends the data transmission from 100m to 200m
Network Protocols and Standards	IEEE 802.3i 10BASET IEEE 802.3u 100BASET IEEE 802.3x Flow Control IEEE 802.3af DTE Power via MDI
Network Medium	Cat5 or more UTP(≤100 meter)
Switching Capacity	1.6Gbps
Forwarding Way	Store-And-Forward architecture
MAC Address Table	1K
Port Description	1x RJ45 PoE input port; 2x RJ45 PoE output ports

PoE standard	IEEE802.3af/at
PoE Port Power	15.4W
Power Supply Pin	Mid-span(4/5+, 7/8- ), end-span(1/2+, 3/6-)
LED Indicator Status	Power; Network; PoE working status
Dimension	80X76X25mm
Environment	Operating temperature: -20 to 55° C Storage temperature: -20 to 75°C Working Humidity: 10%~90%, non-condensing
Safety	CE Mark ,commercial, FCC Class, RoHS
Warranty	3 years warranty


## DIMENSION

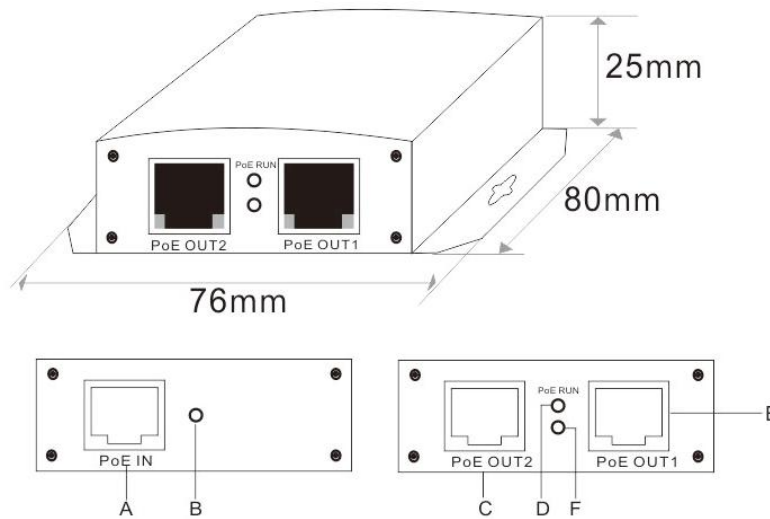

A. PoE Input RJ45port  
C.PoE Output RJ45port2  
E.PoE Output RJ45port1

B. PoE Input Status Light  
D.PoE Output1 Status Light  
F. PoE Output2 Status Light

## APPLICATION

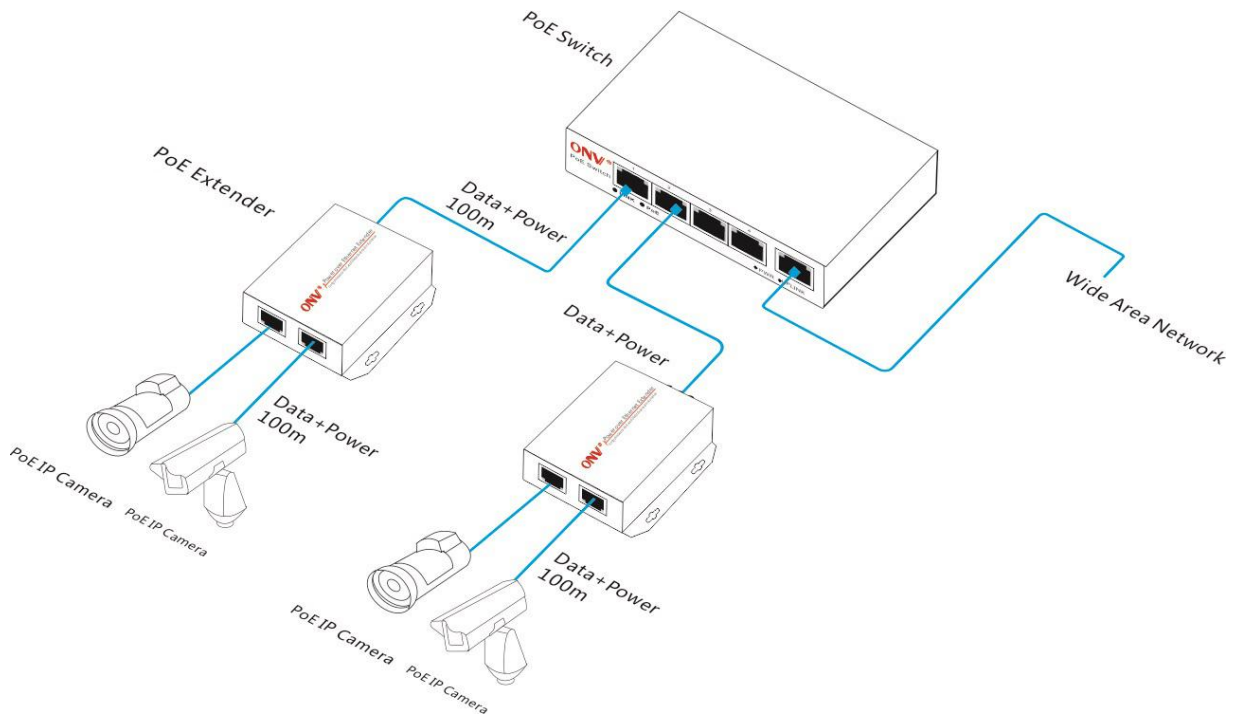

## ORDERING INFORMATION

Model	Description
ONV-PSE-PD3102	10/100M PoE extender with 1x RJ45 input port and 2x RJ45 PoE output port. 15.4W(IEEE802.3af), Extends the data transmission from 100m to 200m.

**Note:** Mid-span (4/5+, 7/8-), end-span (1/2+, 3/6-), can be customized

## PACKING LIST

	CONTENT	QTY	UNIT
PACKING LIST	3-port 10/100M PoE Extender	1	SET
	User Guide	1	PC
	Warranty Card	1	PC

## CONTACT US

**ONV** OPTICAL NETWORK VIDEO TECHNOLOGIES (SHENZHEN) CO., LTD

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: [onv@onv.com.cn](mailto:onv@onv.com.cn)

Website: [www.onvcom.com](http://www.onvcom.com)

Zip: 518000

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen, China

Factory Address: The 4-6th Floor, No. 59, Huaning Road, Xinwei Community, Dalang Street,

Longhua District, Shenzhen, China

